


RXXLD20

LINEAR INTEGRATED CIRCUIT

2A OUTPUT TYPE LOW
POWER-LOSS VOLTAGE
REGULATOR

■ FEATURES


- * Low power-loss(Dropout voltage: 0.5V(max) at $I_{OUT}=2.0A$)
- * 2.0A output type
- * Output voltage precision: $\pm 3.0\%$
- * Built-in ON/OFF control function and over-current protection circuit.
- * Thermal shutdown protection.

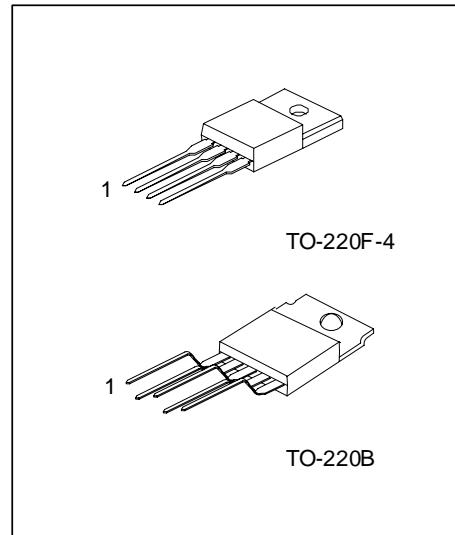

*Pb-free plating product number:RXXLD20L

■ ORDERING INFORMATION


Order Number		Package	Packing
Normal	Lead Free Plating		
RXXLD20-TB5-T	RXXLD20L-TB5-T	TO-220B	Tube
RXXLD20-TF4-T	RXXLD20L-TF4-T	TO-220F-4	Tube

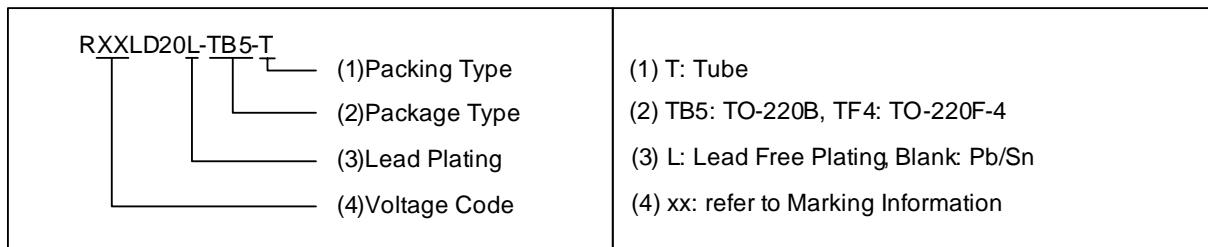

■ PIN DESCRIPTION


PIN NO.		PIN NAME
TO-220F-4	TO-220B	
	1	NC
1	2	INPUT
2	3	OUTPUT
3	4	GND
4	5	ON/OFF

■ MARKING INFORMATION


PACKAGE	VOLTAGE CODE	MARKING
TO-220F-4 TO-220B	33 :3.3V 35 :3.5V 05 :5.0V 06 :6.0V 09 :9.0V 12 :12 V	 VOLTAGE CODE ← Space :Pb/Sn → DATE CODE L: Pb-free

- BLOCK DIAGRAM

TO-220F-4

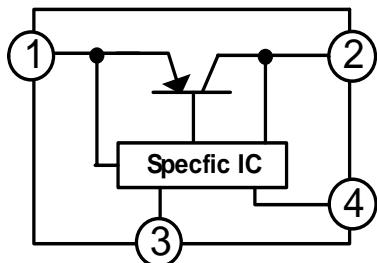

TO-220B

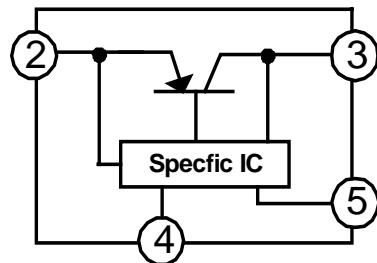

RXXLD20

LINEAR INTEGRATED CIRCUIT

■ ABSOLUTE MAXIMUM RATINGS (Ta=25 °C)

PARAMETER		SYMBOL	RATINGS		UNIT
Input Voltage(Note1)		V _{IN}	20		V
ON/OFF Control Terminal Voltage(Note1)		V _C	20		V
Output Current		I _{OUT}	2.0		A
Power Dissipation	No Heat Sink	P _D	1.4		W
	With Heat Sink		15		W
Junction Temperature(Note2)		T _J	150		°C
Operating Temperature		T _{OPR}	-20 ~ +80		°C
Storage Temperature		T _{STG}	-40 ~ +150		°C

Note1 : All are open except GND and applicable terminals.

Note2 : Overheat protection may operate at 125 °C <math> T_J = 150^{\circ}\text{C}

■ ELECTRICAL CHARACTERISTICS (Refer to the test circuits, unless otherwise specified, Ta=25°C)

For R33LD20(3.3V)

PARAMETER		SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage		V _{OUT}	V _{IN} =5V, I _{OUT} =1A		3.201	3.3	3.399	V
Line Regulation		ΔV _{OUT}	V _{IN} =4 ~ 10V, I _{OUT} =5mA		0.1	2.5		%
Load Regulation		ΔV _{OUT}	V _{IN} =5V, I _{OUT} =5mA ~ 2.0A		0.1	2.0		%
Temperature Coefficient of Output Voltage		T _c V _O	T _J =0 ~ 125°C, I _{OUT} =5mA		±0.02			/°C
Ripple Rejection		RR	Refer to Fig.2		45	55		dB
Dropout Voltage		V _D	(Note1), I _{OUT} =2A			0.5		V
Voltage for Control(Note2)	ON	V _{C(ON)}	V _{IN} =5V		2.0			V
	OFF	V _{C(OFF)}	V _{IN} =5V			0.8		V
Current for Control	ON	I _{C(ON)}	V _C =2.7V, V _{IN} =5V			20		μA
	OFF	I _{C(OFF)}	V _C =0.4V, V _{IN} =5V			-0.4		mA
Quiescent Current		I _Q	I _{OUT} =0A, V _{IN} =5V			10		mA

For R35LD20(3.5V)

PARAMETER		SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage		V _{OUT}	V _{IN} =5.5V, I _{OUT} =1A		3.395	3.5	3.605	V
Line Regulation		ΔV _{OUT}	V _{IN} =4.5 ~ 10.5V, I _{OUT} =5mA		0.1	2.5		%
Load Regulation		ΔV _{OUT}	V _{IN} =5.5V, I _{OUT} =5mA ~ 2.0A		0.1	2.0		%
Temperature Coefficient of Output Voltage		T _c V _O	T _J =0 ~ 125°C, I _{OUT} =5mA		±0.02			/°C
Ripple Rejection		RR	Refer to Fig.2		45	55		dB
Dropout Voltage		V _D	(Note1), I _{OUT} =2A			0.5		V
Voltage for Control(Note2)	ON	V _{C(ON)}	V _{IN} =5V		2.0			V
	OFF	V _{C(OFF)}	V _{IN} =5V			0.8		V
Current for Control	ON	I _{C(ON)}	V _C =2.7V, V _{IN} =5.5V			20		μA
	OFF	I _{C(OFF)}	V _C =0.4V, V _{IN} =5.5V			-0.4		mA
Quiescent Current		I _Q	I _{OUT} =0A, V _{IN} =5.5V			10		mA

For R05LD20(5V)

PARAMETER		SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage		V _{OUT}	V _{IN} =7V, I _{OUT} =1A		4.85	5.0	5.15	V
Line Regulation		ΔV _{OUT}	V _{IN} =6 ~ 12V, I _{OUT} =5mA		0.5	2.5		%
Load Regulation		ΔV _{OUT}	V _{IN} =7V, I _{OUT} =5mA ~ 2.0A		0.1	2.0		%
Temperature Coefficient of Output Voltage		T _c V _O	T _J =0 ~ 125°C, I _{OUT} =5mA		±0.02			/°C
Ripple Rejection		RR	Refer to Fig.2		45	55		dB
Dropout Voltage		V _D	(Note1), I _{OUT} =2A			0.5		V
Voltage for Control(Note2)	ON	V _{C(ON)}	V _{IN} =7V		2.0			V
	OFF	V _{C(OFF)}	V _{IN} =7V			0.8		V
Current for Control	ON	I _{C(ON)}	V _C =2.7V, V _{IN} =7V			20		μA
	OFF	I _{C(OFF)}	V _C =0.4V, V _{IN} =7V			-0.4		mA
Quiescent Current		I _Q	I _{OUT} =0A, V _{IN} =7V			10		mA



■ ELECTRICAL CHARACTERISTICS(Cont.)

For R06LD20(6V)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	$V_{IN} = 8V, I_{OUT} = 1A$	5.82	6.0	6.18	V
Line Regulation	ΔV_{OUT}	$V_{IN} = 7 \sim 13V, I_{OUT} = 5mA$		0.5	2.5	%
Load Regulation	ΔV_{OUT}	$V_{IN} = 8V, I_{OUT} = 5mA \sim 2.0A$		0.1	2.0	%
Temperature Coefficient of Output Voltage	$TcVo$	$T_J = 0 \sim 125^\circ C, I_{OUT} = 5mA$		± 0.02		/°C
Ripple Rejection	RR	Refer to Fig.2	45	55		dB
Dropout Voltage	V_D	(Note1), $I_{OUT} = 2A$			0.5	V
Voltage for Control(Note2)	ON	$V_{C(ON)}$	$V_{IN} = 8V$	2.0		V
	OFF	$V_{C(OFF)}$	$V_{IN} = 8V$		0.8	V
Current for Control	ON	$I_{C(ON)}$	$V_C = 2.7V, V_{IN} = 8V$		20	μA
	OFF	$I_{C(OFF)}$	$V_C = 0.4V, V_{IN} = 8V$		-0.4	mA
Quiescent Current	I_Q	$I_{OUT} = 0A, V_{IN} = 8V$			10	mA

For R09LD20(9V)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	$V_{IN} = 11V, I_{OUT} = 1A$	8.73	9.0	9.27	V
Line Regulation	ΔV_{OUT}	$V_{IN} = 10 \sim 16V, I_{OUT} = 5mA$		0.5	2.5	%
Load Regulation	ΔV_{OUT}	$V_{IN} = 11V, I_{OUT} = 5mA \sim 2.0A$		0.1	2.0	%
Temperature Coefficient of Output Voltage	$TcVo$	$T_J = 0 \sim 125^\circ C, I_{OUT} = 5mA$		± 0.02		/°C
Ripple Rejection	RR	Refer to Fig.2	45	55		dB
Dropout Voltage	V_D	(Note1), $I_{OUT} = 2A$			0.5	V
Voltage for Control(Note2)	ON	$V_{C(ON)}$	$V_{IN} = 11V$	2.0		V
	OFF	$V_{C(OFF)}$	$V_{IN} = 11V$		0.8	V
Current for Control	ON	$I_{C(ON)}$	$V_C = 2.7V, V_{IN} = 11V$		20	μA
	OFF	$I_{C(OFF)}$	$V_C = 0.4V, V_{IN} = 11V$		-0.4	mA
Quiescent Current	I_Q	$I_{OUT} = 0A, V_{IN} = 11V$			10	mA

For R12LD20(12V)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	$V_{IN} = 14V, I_{OUT} = 1A$	11.64	12.0	12.36	V
Line Regulation	ΔV_{OUT}	$V_{IN} = 13 \sim 19V, I_{OUT} = 5mA$		0.5	2.5	%
Load Regulation	ΔV_{OUT}	$V_{IN} = 14V, I_{OUT} = 5mA \sim 2.0A$		0.1	2.0	%
Temperature Coefficient of Output Voltage	$TcVo$	$T_J = 0 \sim 125^\circ C, I_{OUT} = 5mA$		± 0.02		/°C
Ripple Rejection	RR	Refer to Fig.2	45	55		dB
Dropout Voltage	V_D	(Note1), $I_{OUT} = 2A$			0.5	V
Voltage for Control(Note2)	ON	$V_{C(ON)}$	$V_{IN} = 14V$	2.0		V
	OFF	$V_{C(OFF)}$	$V_{IN} = 14V$		0.8	V
Current for Control	ON	$I_{C(ON)}$	$V_C = 2.7V, V_{IN} = 14V$		20	μA
	OFF	$I_{C(OFF)}$	$V_C = 0.4V, V_{IN} = 14V$		-0.4	mA
Quiescent Current	I_Q	$I_{OUT} = 0A, V_{IN} = 14V$			10	mA

Note: 1. Input voltage shall be the value when output voltage is 95% in comparison with the initial value.

2. In case of opening control terminal(pin 5 of TO-220B, pin 4 of TO-220F-4), output voltage turns on.

■ TEST CIRCUITS

Note : () : TO-220F-4, () : TO-220B


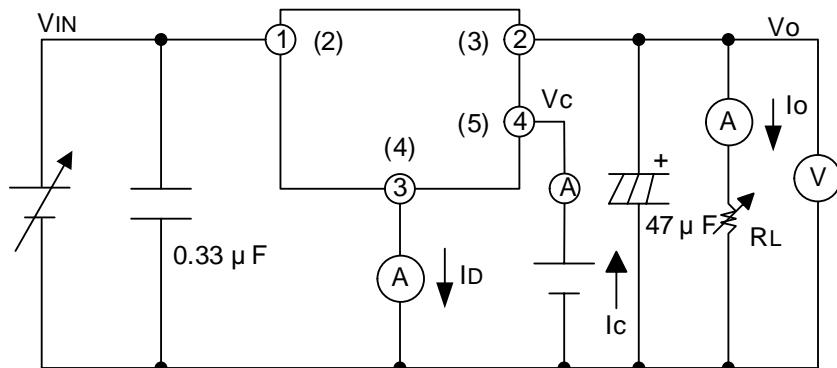


Fig.1

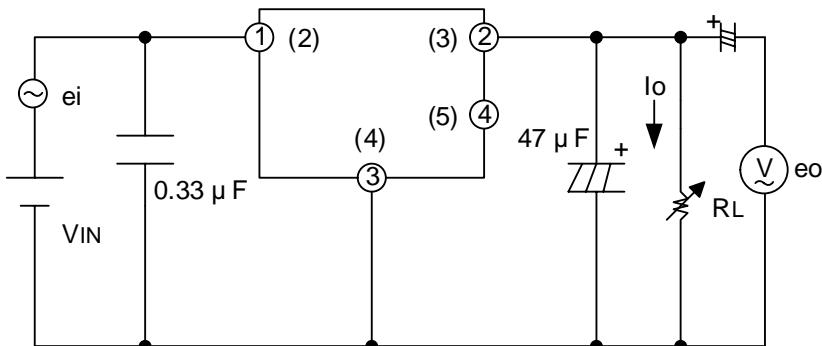


$V_{IN}=5V(R33LD20)$
 $5.5V(R35LD20)$
 $7V(R05LD20)$
 $8V(R06LD20)$
 $11V(R09LD20)$
 $14V(R12LD20)$

$f=120Hz$
 $ei=0.5Vrms$
 $I_o=0.5A$
 $RR=20\log (ei/eo)$

Fig.2 For Ripple Rejection

■ TYPICAL APPLICATION

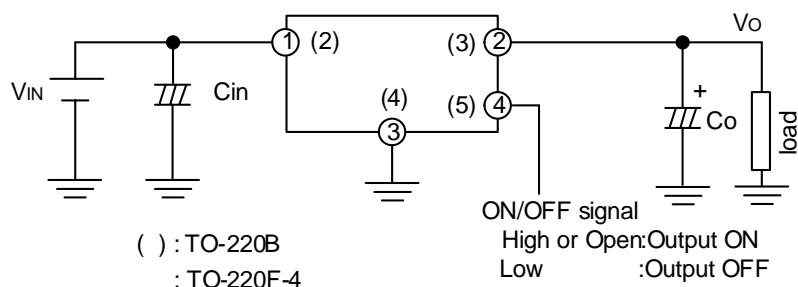

■ TYPICAL CHARACTERISTICS

Fig.3 Power Dissipation vs. Ambient Temperature


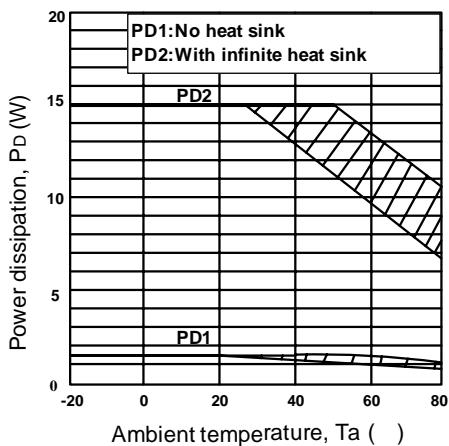


Fig.4 Overcurrent Protection Characteristics(Typical Value) (R33LD20)

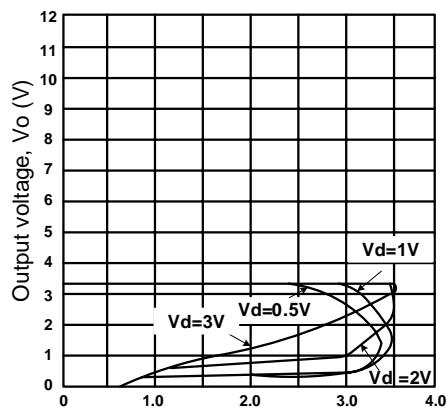

Note: Oblique line portion:Overheat protection may operate in this area .

Fig.5 Overcurrent Protection Characteristics (Typical Value)(R05LD20)

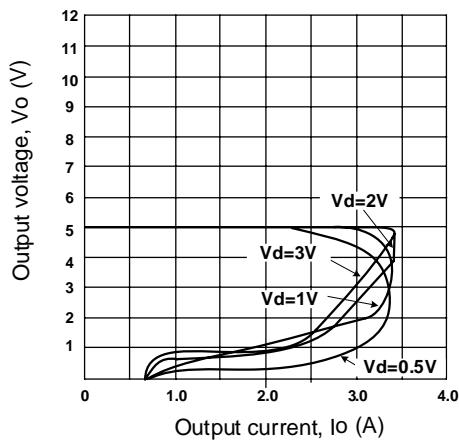


Fig.6 Overcurrent Protection Characteristics (Typical Value)(R09LD20)

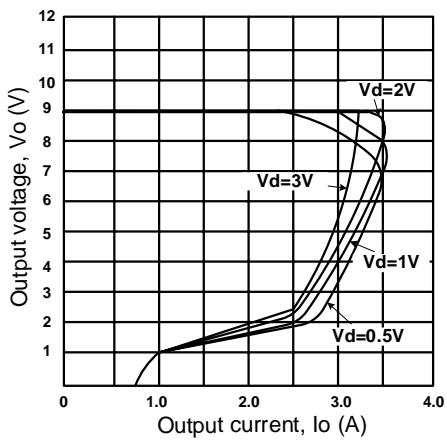


Fig.7 Overcurrent Protection Characteristics (Typical Value)(R12LD20)


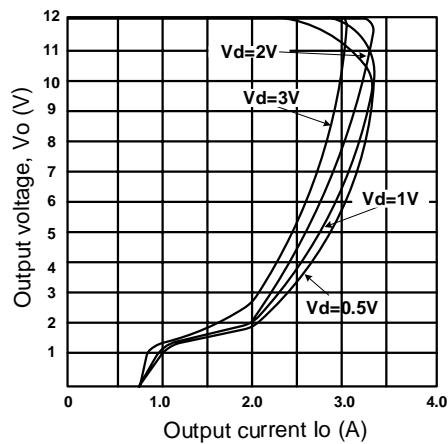


Fig.8 Output Voltage Deviation vs .Junction Temperature (R03LD20)

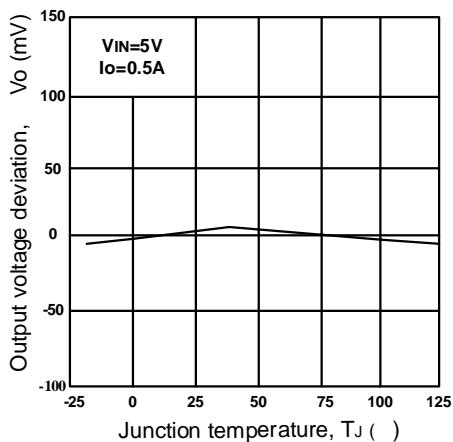

■ TYPICAL CHARACTERISTICS(Cont.)

Fig.9 Output Voltage Deviation vs .Junction Temperature (R05LD20)

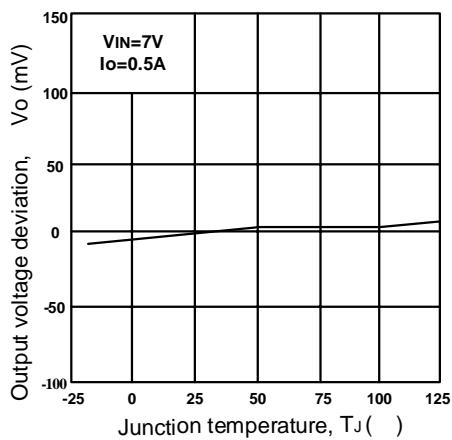


Fig.10 Output Voltage Deviation vs .Junction Temperature (R09LD20)

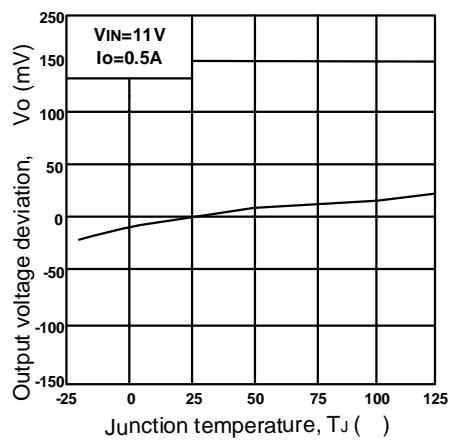


Fig.11 Output Voltage Deviation vs .Junction Temperature (R12LD20)

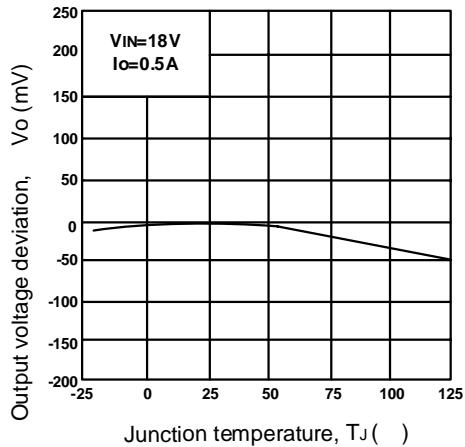


Fig.12 Output Voltage vs .Input Voltage (R33LD20)

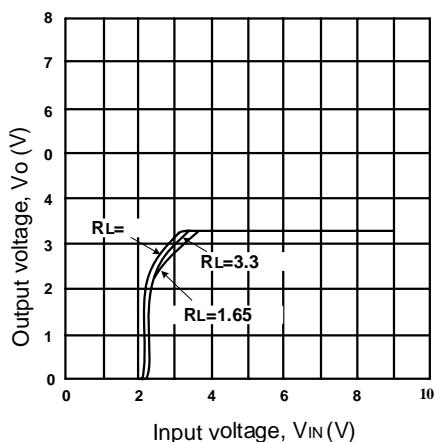


Fig.13 Output Voltage vs .Input Voltage (R05LD20)


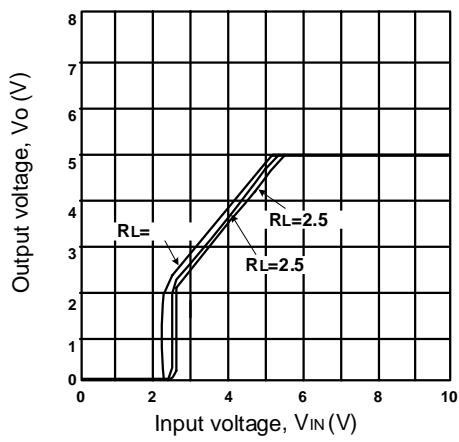


Fig.14 Output Voltage vs .Input Voltage (R09LD20)

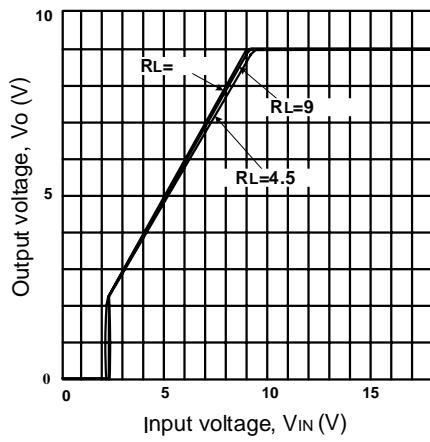

■ TYPICAL CHARACTERISTICS(Cont.)

Fig.15 Output Voltage vs .Input Voltage (R12LD30)

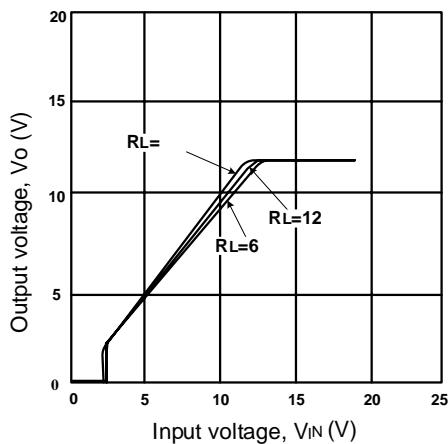


Fig.16 Circuit Operating Current vs .Input Voltage (R33LD30)

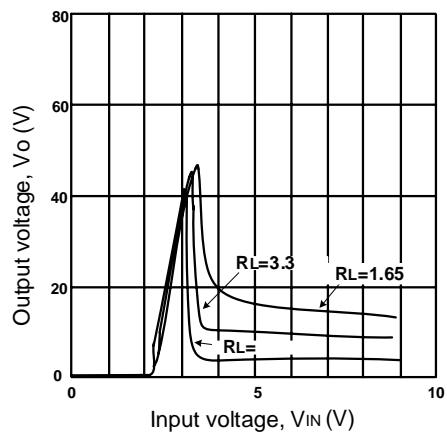


Fig.17 Circuit Operating Current vs .Input Voltage (R05LD30)

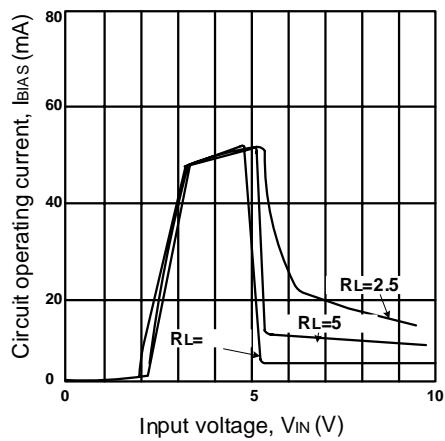


Fig.18 Circuit Operating Current vs .Input Voltage (R09LD30)

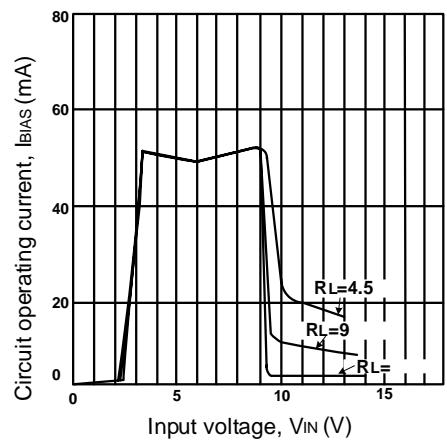


Fig.19 Circuit Operating Current vs .Input Voltage (R12LD30)




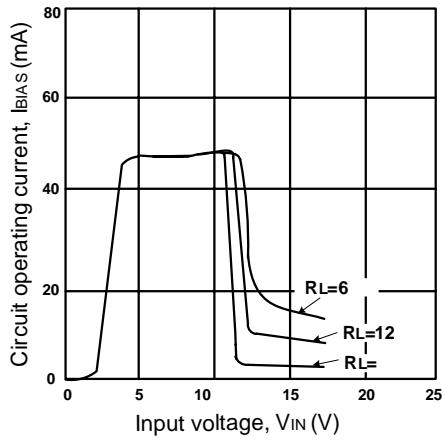


Fig.20 Dropout Voltage vs .Junction Temperature

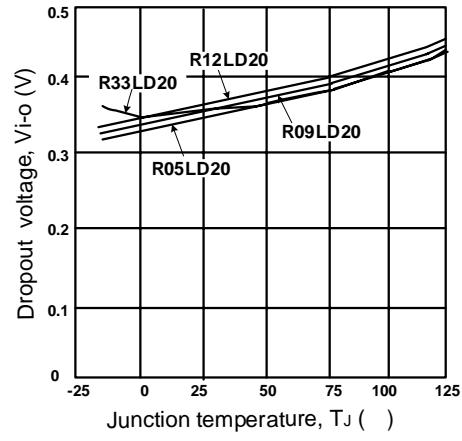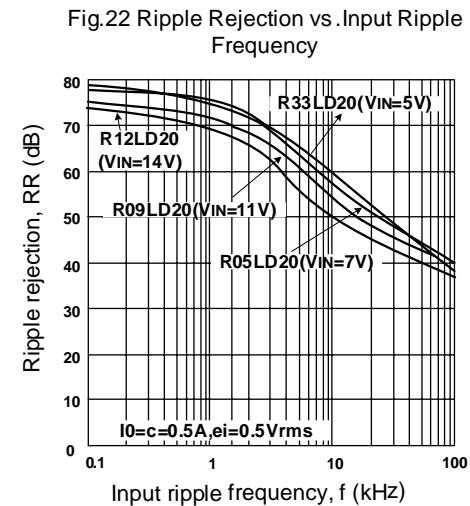

■ TYPICAL CHARACTERISTICS(Cont.)

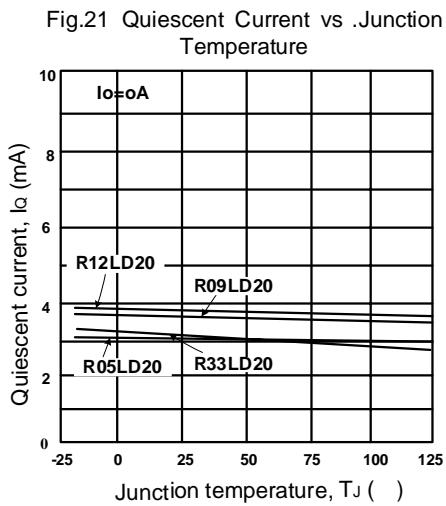

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.