


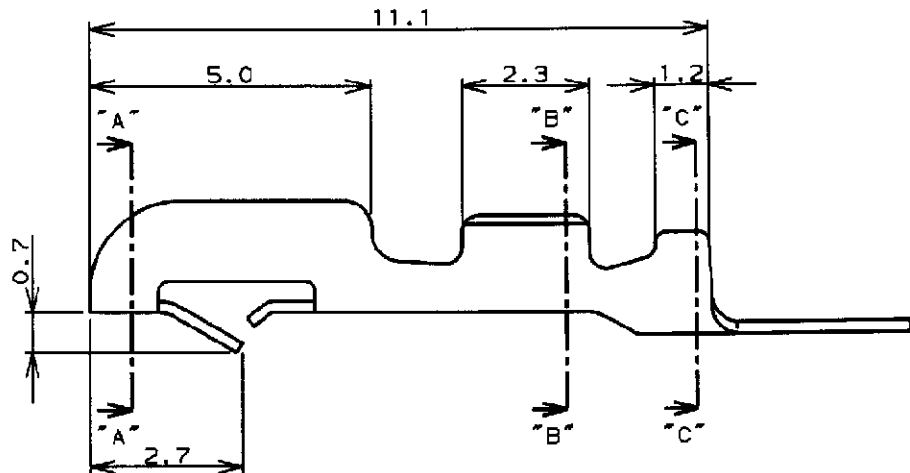



LOC	DIS	REVISIONS						
J		P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
			E	REDRAWN	FJ00-1640-97	31 OCT. '97	H.H	S.K

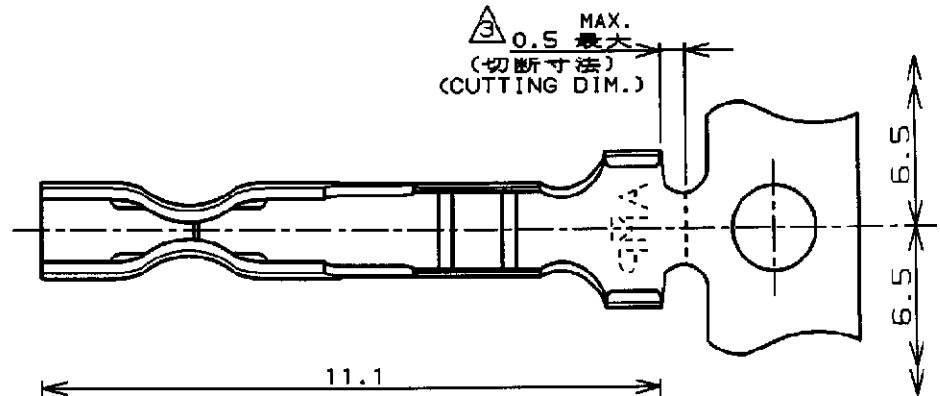

NOTES:

1. HOUSINGS, P/N:171822 AND 171880 ARE USED.
2. L/P CONTACT P/N:170205-1.
- △ HAND TOOL P/N:722561-1.

注記:

1. 使用ハウジングは製品型番:171822及び171880.
2. L/P端子 製品型番:170205-1.
- △ 適用手動工具 製品型番:722561-1.

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

AMP 1469-35 REV 10/93

FJ025072

WIRE RANGE 包含電線断面積 0.05~0.15mm ² (AWG30~26)		INSULATION DIA 被覆外径 1.0~1.4mm	
MATERIAL BRASS 材料 0.2mm THICKNESS		FINISH 仕上 PRE-TIN	
AMP		日本エー・エム・ピー株式会社 Kawasaki, Japan	
NAME 名称 コンタクト (AMP EI シリーズ コネクタ) CONTACT (AMP EI SERIES CONNECTOR)			
SIZE A	CAGE CODE 00779	DRAWING NO 番号 C=170263-1	
SCALE 尺度 8-1		SHEET 1	OF 1
REV E			

DIMENSIONS: 単位 概 mm		DWN 31 OCT. '97 H. Hoshino
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK 31 OCT. '97 S. Kuroki
一般公差 10mm ±0.4 30mm ±0.4 100mm ±0.4 ANGLE ±1°0'		APVD 4 NOV 97 S. Kuroki
PRODUCT SPEC 製品規格 108-5118		
APPLICATION SPEC 取付適用規格 114-5035		
WEIGHT —		
CUSTOMER DRAWING		