


Class 2 Transformers


PC BOARD MOUNT

Designed With The Same Construction As Our 14A Series International Transformers.
Isolation is 4000V.

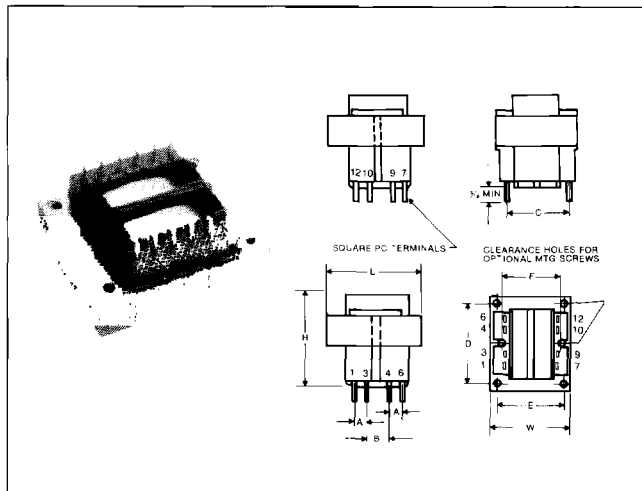

Dimensions							Pin Dimensions	Mtg.			Mtg Size	Screw Quant	Lbs.
VA	L	W	H	A	B	C		D	E	F			
2.5	1 5/8	1 5/16	1 1/8	.200	.250	1.000	0.025SQ	-	-	1 1/16	#4	2	0.25
5.0	1 5/8	1 5/16	1 3/8	.200	.400	1.000	0.025SQ	-	-	1 1/16	#4	2	0.37
10.0	1 7/8	1 9/16	1 3/8	.200	.400	1.140	0.038SQ	-	-	1 1/4	#4	2	0.53
20.0	2 1/4	1 7/8	1 5/8	.400	.400	1.460	0.038SQ	-	-	1 1/2	#4	2	0.90
30.0	2 5/8	2 3/16	1 9/16	.550	.275	1.680	0.045SQ	2 3/16	1 3/4	-	#6	4	1.15
50.0	3	2 1/2	1 13/16	.600	.300	1.900	0.045SQ	2 1/2	2	-	#6	4	1.70

115/230V
50/60Hz
DUAL
PRIMARIES




Part Number	Secondary RMS Rating	Secondary Fuse Required
CL2-2.5-12B1	12V@.20A	N/A*
CL2-2.5-24B2	24V@.10A	N/A*
CL2-5.0-12B3	12V@.42A	N/A*
CL2-5.0-24B4	24V@.20A	N/A*
CL2-10-12B5	12V@.83A	N/A*
CL2-10-24B6	24V@.42A	N/A*
CL2-20-12B7	12V@1.66A	N/A*
CL2-20-24B8	24V@.833A	N/A*
CL2-30-12B9	12V@2.50A	3.0A
CL2-30-24B10	24V@1.25A	N/A*
CL2-50-12B11	12V@4.20A	5.0A
CL2-50-24B12	24V@2.10A	2.5A


*Inherently Limited - No Fuse Required.

CHASSIS MOUNT

Designed With The Same Construction As Our A41 Series International Transformers.
Isolation is 4000V.

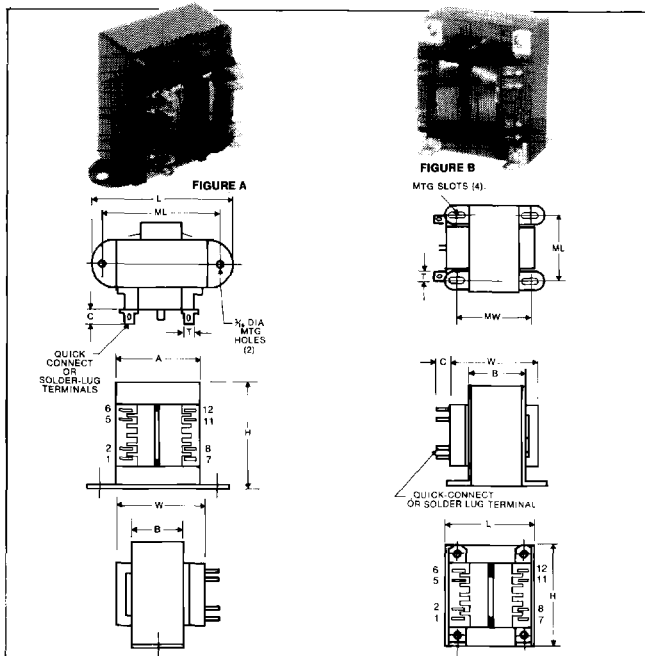

115/230V
50/60HZ
DUAL
PRIMARIES



Dimensions							Mtg.		Mtg. Screw	Lbs.
VA	L	W	H	A	B	C	Terminals	Fig.		
25	2 13/16	1 7/8	2 5/16	2	1 1/8	3/16	3/16 (.187)	A	2 3/4	1.25
40	3 1/8	2 1/16	2 11/16	2 1/4	1 1/8	3/16	3/16 (.187)	A	2 13/16	1.6
80	2 1/2	2 3/8	3	-	1 3/8	3/16	3/16 (.187)	B	2	2.8

Part Number	Secondary RMS Rating	Secondary Fuse Required
CL2-25-12A1	12V@ 2.10A	2.5A
CL2-25-24A2	24V@ 1.05A	N/A*
CL2-40-12A3	12V@ 3.33A	4.0A
CL2-40-24A4	24V@ 1.66A	2.0A
CL2-80-24A5	12V@ 3.33A	4.0A

*Inherently Limited - No Fuse Required.

385 HIGHWAY 33, ENGLISHTOWN, NJ 07726
908/446-3110 FAX 908/446-5362

EWC®
INC.