

**EM7000 Series**  
**Two-Tier Terminal Blocks**  
 7.62 Centers

**SPECIFICATIONS**

- Rating:** 15A, 300V
- Center Spacing:** .300" (7.62)
- Wire Size:** #16-22 AWG
- Housing Material:** Black, UL Rated 94VO Thermoplastic
- Contact Material:** Tin Plated Brass
- Screw Material:** M 3x0 Nickel Plated Steel
- Operating Temperature:** 105°C (221°F) Max., -40°C (-40°F) min.
- Torque Rating:** 9 in.-lb.
- Recommended PCB Hole Diameters:** .051" (1.30)
- Construction:** Mold to Length
- Agency Approvals:** UL E62622; CSA Pending; CE Certified



EM713710



EM711706




EM712708


Poles	L (mm)	S (mm)
2	21.2	7.62
3	28.8	15.24
4	36.4	22.86
5	44.0	30.48
6	51.6	38.10
7	59.3	45.72
8	66.9	53.34
9	74.5	60.96
10	82.1	68.58
11	89.7	76.20
12	97.4	83.82
13	105.0	91.44
14	112.6	99.06
15	120.2	106.68
16	127.8	114.30

To convert to inches, divide by 25.4


**EM7117 Series**

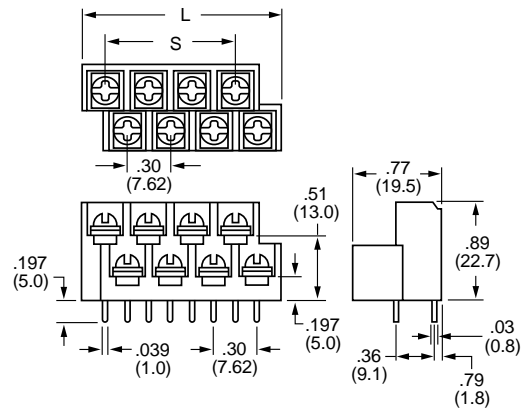

**EM7127 Series**

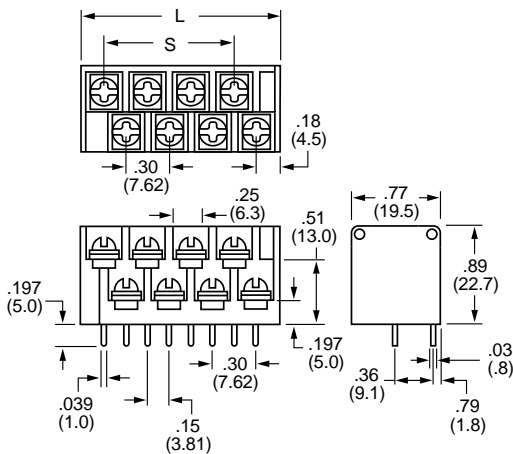

**EM7137 Series**

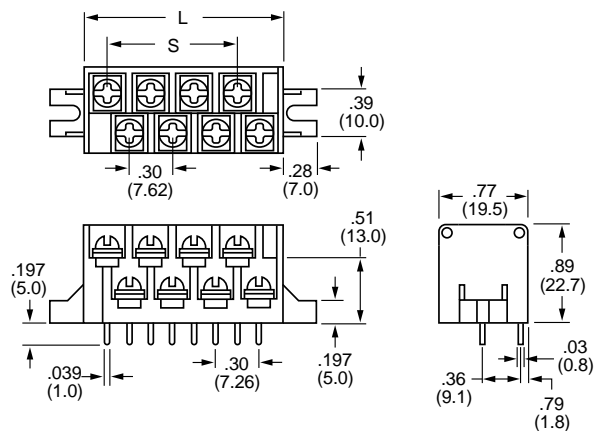

**Part Numbering System**

<b>Series</b>	<b>Poles</b>	<b>Options</b>
EM - nnnn - nn	2 - 16	n
7117		WC - with cover
7127		(EM7127 & EM7137
7137		Series only)