


TYPE QN-F FINGRIP™

NYLON INSULATED FEMALE QUICK DISCONNECTS

B-36

MATERIAL: TIN-PLATED
BRASS
300 VOLTS MAX. 105°C MAX.

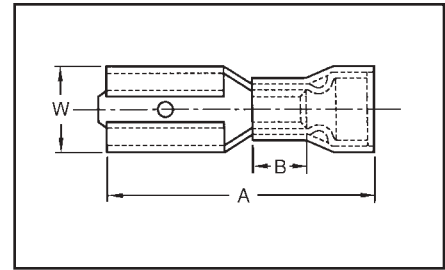

Features and Benefits

- Sleeved barrel.
- Insulated connectors.
 - ◊ Eliminate the need for post installation insulation.
- Funnel entry barrel opening.
 - ◊ Assures quick and easy wire insertion.
- Dimpled female socket detent.
 - ◊ Ensures firm grip.

FEMALE NYLON DISCONNECT TERMINAL

(Mates with Type QN-M male disconnects)


STANDARD CATALOG NO.	STD. PKG. QTY.	WIRE RANGE	NEMA TAB SIZE	DIMENSIONS			BULK CATALOG NO.	BULK PKG. QTY.	INSTALLATION TOOL*
				A	B	W			
QN18F18X02D	100	18-22	.187 × .020	0.86	0.17	0.22	QN18F18X02B	1000	Y10D
QN18F25X03D			.250 × .032	0.91	0.17	0.29	QN18F25X03B		
QN14F11X02D	100	14-16	.110 × .020	0.84	0.17	0.14	QN14F11X02B		
QN14F18X02D			.187 × .020	0.87	0.17	0.23	QN14F18X02B		
QN14F25X03D			.250 × .032	0.92	0.17	0.29	QN14F25X03B		
QN10F25X03D	50	10-12	.250 × .032	1.02	0.27	0.29	QN10F25X03B	500	

* For UL listed applications consult BURNDY® factory.

TYPE Q-M FINGRIP™

NON-INSULATED MALE QUICK DISCONNECTS

MATERIAL: TIN-PLATED
BRASS

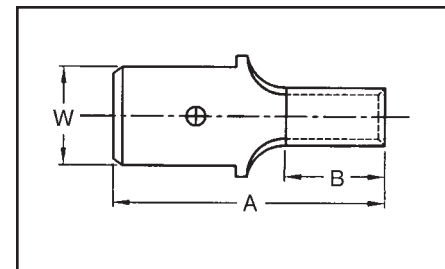

Features and Benefits

- Butted seam.
- Chamfered barrel opening.
 - ◊ Assures quick and easy wire insertion.
- Mates with dimpled female socket detent.
 - ◊ Ensures firm grip.

MALE BARE DISCONNECT TERMINAL

(Mates with Type Q-F female disconnects)

STANDARD CATALOG NO.	STD. PKG. QTY.	WIRE RANGE	NEMA TAB SIZE	DIMENSIONS			BULK CATALOG NO.	BULK PKG. QTY.	INSTALLATION TOOL*
				A	B	W			
Q18M18X02D	100	18-22	.187 × .020	0.55	0.17	0.19	Q18M18X02B	1000	MR20, Y10D
Q18M25X03D			.250 × .032	0.67	0.17	0.25	Q18M25X03B		
Q14M18X02D	100	14-16	.187 × .020	0.55	0.17	0.19	Q14M18X02B	1000	
Q14M25X03D			.250 × .032	0.67	0.17	0.25	Q14M25X03B		

* For UL listed applications consult BURNDY® factory.