


**MCT2
MCT2200**

**MCT2E
MCT2201**


**MCT210
MCT2202**

MCT271

WHITE PACKAGE (-M SUFFIX)



BLACK PACKAGE (NO -M SUFFIX)



DESCRIPTION

The MCT2XXX series optoisolators consist of a gallium arsenide infrared emitting diode driving a silicon phototransistor in a 6-pin dual in-line package.


FEATURES

- UL recognized (File # E90700)
- VDE recognized (File # 94766)
 - Add option V for white package (e.g., MCT2V-M)
 - Add option 300 for black package (e.g., MCT2.300)
- MCT2 and MCT2E are also available in white package by specifying -M suffix, eg. MCT2-M

APPLICATIONS

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs

SCHEMATIC



PIN 1. ANODE
2. CATHODE
3. NO CONNECTION
4. EMITTER
5. COLLECTOR
6. BASE

MCT2
MCT2200

MCT2E
MCT2201

MCT210
MCT2202

MCT271

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Device	Value	Units
TOTAL DEVICE Storage Temperature	T_{STG}	ALL	-55 to +150	°C
Operating Temperature	T_{OPR}	ALL	-55 to +100	°C
Lead Solder Temperature	T_{SOL}	ALL	260 for 10 sec	°C
Total Device Power Dissipation @ $T_A = 25^{\circ}\text{C}$	P_D	-M	250	mW
		Non-M	260	
Derate above 25°C		-M	2.94	mW/°C
		Non-M	3.3	
EMITTER DC/Average Forward Input Current	I_F	-M	60	mA
		Non-M	100	
Reverse Input Voltage	V_R	ALL	3	V
Forward Current - Peak (300µs, 2% Duty Cycle)	$I_F(pk)$	ALL	3	A
LED Power Dissipation @ $T_A = 25^{\circ}\text{C}$	P_D	-M	120	mW
		Non-M	150	
Derate above 25°C		-M	1.41	mW/°C
		Non-M	2.0	
DETECTOR Collector Current	I_C	ALL	50	mA
Collector-Emitter Voltage	V_{CEO}	ALL	30	V
Detector Power Dissipation @ $T_A = 25^{\circ}\text{C}$	P_D	ALL	150	mW
Derate above 25°C		-M	1.76	mW/°C
		Non-M	2.0	

**MCT2
MCT2200**

**MCT2E
MCT2201**

**MCT210
MCT2202**

MCT271

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise specified.)

Individual Component Characteristics

Parameter	Test Conditions	Symbol	Device	Min	Typ**	Max	Unit
EMITTER							
Input Forward Voltage	(I _F = 20 mA)	V _F	MCT2/-M MCT2E/-M MCT271 MCT2200 MCT2201 MCT2202		1.25	1.50	V
	(T _A = 0-70°C, I _F = 40 mA)		MCT210		1.33		
Reverse Leakage Current	(V _R = 3.0 V)	I _R	MCT2/-M MCT2E/-M MCT271 MCT2200 MCT2201 MCT2202		0.001	10	μA
	(T _A = 0-70°C, V _R = 6.0 V)		MCT210				
DETECTOR							
Collector-Emitter Breakdown Voltage	(I _C = 1.0 mA, I _F = 0)	BV _{CEO}	ALL	30	100		V
	(T _A = 0-70°C)		MCT210				
Collector-Base Breakdown Voltage	(I _C = 10 μA, I _F = 0)	BV _{CBO}	MCT2/-M MCT2E/-M MCT271 MCT2200 MCT2201 MCT2202	70	120		V
	(T _A = 0-70°C)		MCT210	30			
Emitter-Collector Breakdown Voltage	(I _E = 100 μA, I _F = 0)	BV _{ECO}	MCT2/-M MCT2E/-M MCT271 MCT2200 MCT2201 MCT2202	7	10		V
	(T _A = 0-70°C)		MCT210	6	10		
Collector-Emitter Dark Current	(V _{CE} = 10 V, I _F = 0)	I _{CEO}	ALL		1	50	nA
	(V _{CE} = 5 V, T _A = 0-70°C)					30	μA
Collector-Base Dark Current	(V _{CB} = 10 V, I _F = 0)	I _{CBO}	ALL			20	nA
Capacitance	(V _{CE} = 0 V, f = 1 MHz)	C _{CE}	ALL		8		pF

** Typical values at $T_A = 25^\circ\text{C}$

MCT2
MCT2200

MCT2E
MCT2201

MCT210
MCT2202

MCT271

TRANSFER CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise specified.)

DC Characteristic	Test Conditions	Symbol	Device	Min	Typ**	Max	Unit
Output Collector Current	(T _A = 0-70°C)	CTR	MCT210	150			%
	(I _F = 10 mA, V _{CE} = 5 V)		MCT2200	20			
			MCT2201	100			
			MCT2202	63		125	
	(I _F = 10 mA, V _{CE} = 10 V)		MCT2 MCT2-M MCT2E MCT2E-M	20			
			MCT271	45		90	
(I _F = 3.2 mA to 32 mA, V _{CE} = 0.4 V) (T _A = 0-70°C)	MCT210	50					
Collector-Emitter Saturation Voltage	(I _C = 2 mA, I _F = 16 mA)	V _{CE (SAT)}	MCT2 MCT2-M MCT2E MCT2E-M MCT271			0.4	V
	MCT210						
	MCT2200 MCT2201 MCT2202						
AC Characteristic Saturated Turn-on Time from 5 V to 0.8 V	(I _F = 15 mA, V _{CC} = 5 V, R _L = 2 kΩ) (R _B = Open) (Fig. 20)	t _{on}	MCT2		1.1		μs
	(I _F = 20 mA, V _{CC} = 5 V, R _L = 2 kΩ) (R _B = 100 kΩ) (Fig. 20)		MCT2E		1.1		
			MCT2		1.3		
			MCT2E		1.3		
Saturated Turn-off Time from SAT to 2.0 V	(I _F = 15 mA, V _{CC} = 5 V, R _L = 2 kΩ) (R _B = Open) (Fig. 20)	t _{off}	MCT2		50		
	MCT2E			50			
	(I _F = 20 mA, V _{CC} = 5 V, R _L = 2 kΩ) (R _B = 100 kΩ) (Fig. 20)		MCT2		20		
			MCT2E		20		
Turn-on Time	(I _F = 10 mA, V _{CC} = 10 V, R _L = 100 Ω)	t _{on}	MCT2-M MCT2E-M		2		
Turn-off Time	(I _F = 10 mA, V _{CC} = 10 V, R _L = 100 Ω)	t _{off}	MCT2-M MCT2E-M		2		
Rise Time	(I _F = 10 mA, V _{CC} = 10 V, R _L = 100 Ω)	t _r	MCT2-M MCT2E-M		2		
Fall Time	(I _F = 10 mA, V _{CC} = 10 V, R _L = 100 Ω)	t _f	MCT2-M MCT2E-M		1.5		

** Typical values at $T_A = 25^\circ\text{C}$

MCT2
MCT2200

MCT2E
MCT2201

MCT210
MCT2202

MCT271

TRANSFER CHARACTERISTICS (Cont.)

AC Characteristic	Test Conditions	Symbol	Device	Min	Typ**	Max	Unit
Saturated turn-on time	$(I_F = 16 \text{ mA}, R_L = 1.9\text{k}\Omega, V_{CC} = 5 \text{ V})$ (Fig. 20)	t_{on}	MCT271		1.0		μs
Saturated turn-off time (Approximates a typical TTL interface)		t_{off}			48		
Saturated turn-on time	$(I_F = 16 \text{ mA}, R_L = 4.7\text{k}\Omega, V_{CC} = 5 \text{ V})$ (Fig. 20)	t_{on}			1.0		
Saturated turn-off time (Approximates a typical low power TTL interface)		t_{off}			98		
Saturated rise time	$(I_F = 16 \text{ mA}, R_L = 560\Omega, V_{CC} = 5 \text{ V})$ (Fig. 20, 21)	t_r	MCT210		1.0		
Saturated fall time		t_f			11		
Saturated propagation delay - high to low	$(I_F = 16 \text{ mA}, R_L = 2.7\text{k}\Omega)$ (Fig. 20, 21)	$T_{PD} \text{ (HL)}$			1.0		
Saturated propagation delay - low to high		$T_{PD} \text{ (LH)}$			50		
Non-saturated turn on time	$(I_C = 2 \text{ mA}, V_{CC} = 10 \text{ V}, R_L = 100\Omega)$ (Fig. 20)	T_{ON}	MCT2200 MCT2201 MCT2202		2	10	
Non-saturated turn off time		T_{OFF}			2	10	
Non-saturated rise time	$(I_C = 2 \text{ mA}, V_{CC} = 5 \text{ V}, R_L = 100\Omega)$ (Fig. 20)	t_r	MCT210		2		
Non-saturated fall time		t_f			2		
Non-saturated turn-on time	$(I_C = 2 \text{ mA}, V_{CC} = 5 \text{ V}, R_L = 100\Omega)$ (Fig. 20)	t_{on}	MCT271		2	7	
Non-saturated turn-off time		t_{off}			2	7	

** Typical values at $T_A = 25^\circ\text{C}$

ISOLATION CHARACTERISTICS

Characteristic	Test Conditions	Symbol	Min	Typ*	Max	Units
Input-Output Isolation Voltage	(Non '-M', Black Package) ($f = 60 \text{ Hz}, t = 1 \text{ min}$)	V_{ISO}	5300			Vac(rms)
	('M', White Package) ($f = 60 \text{ Hz}, t = 1 \text{ sec}$)		7500			Vac(pk)
Isolation Resistance	$(V_{I-O} = 500 \text{ VDC})$	R_{ISO}	10^{11}			Ω
Isolation Capacitance	$(V_{I-O} = \&, f = 1 \text{ MHz})$	C_{ISO}		0.5		pF
	('M' White Package)			0.2	2	pF

Note

* Typical values at $T_A = 25^\circ\text{C}$

**MCT2
MCT2200**


**MCT2E
MCT2201**

**MCT210
MCT2202**


MCT271

TYPICAL PERFORMANCE CURVES


**Fig. 1 LED Forward Voltage vs. Forward Current
(Black Package)**

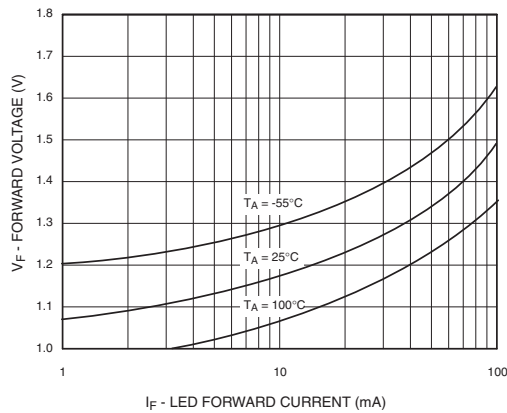


**Fig. 2 LED Forward Voltage vs. Forward Current
(White Package)**

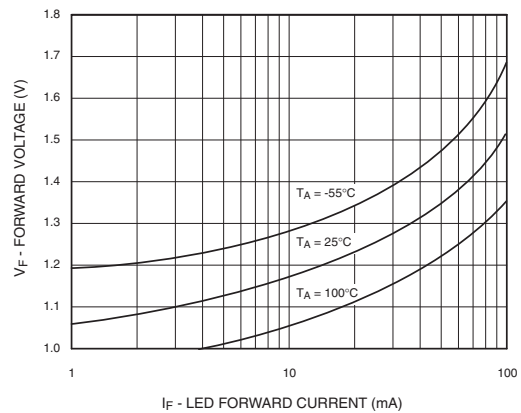


**Fig.3 Normalized CTR vs. Forward Current
(Black Package)**

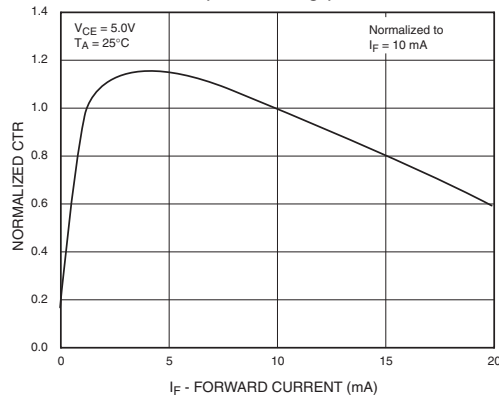


**Fig.4 Normalized CTR vs. Forward Current
(White Package)**

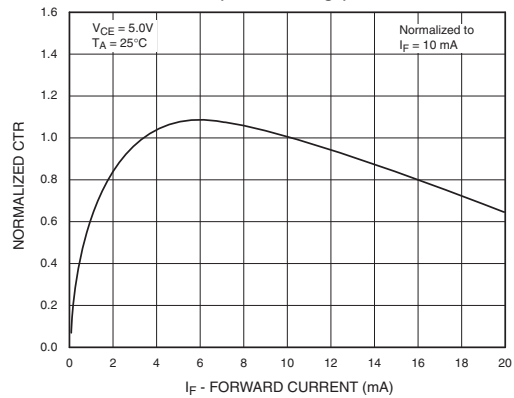

**Fig. 5 Normalized CTR vs. Ambient Temperature
(Black Package)**

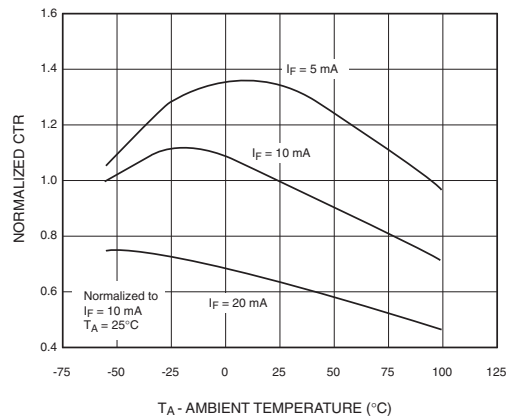

**Fig. 6 Normalized CTR vs. Ambient Temperature
(White Package)**

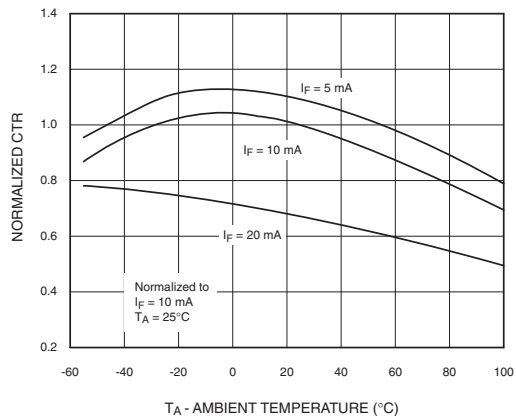


**MCT2
MCT2200**

**MCT2E
MCT2201**


**MCT210
MCT2202**

MCT271


**Fig. 7 CTR vs. RBE (Unsaturated)
(Black Package)**

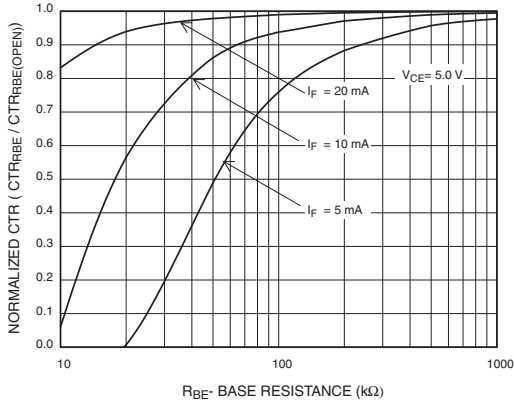


**Fig. 8 CTR vs. RBE (Unsaturated)
(White Package)**

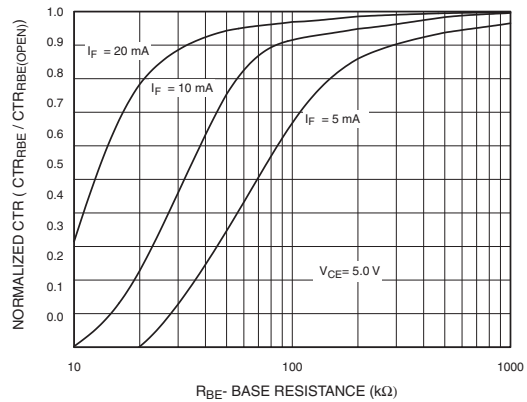


**Fig. 9 CTR vs. RBE (Saturated)
(Black Package)**

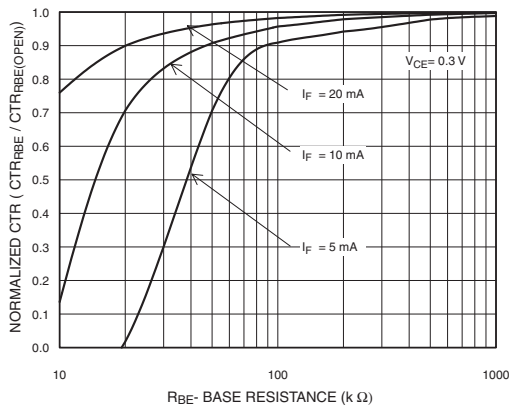


**Fig. 10 CTR vs. RBE (Saturated)
(White Package)**

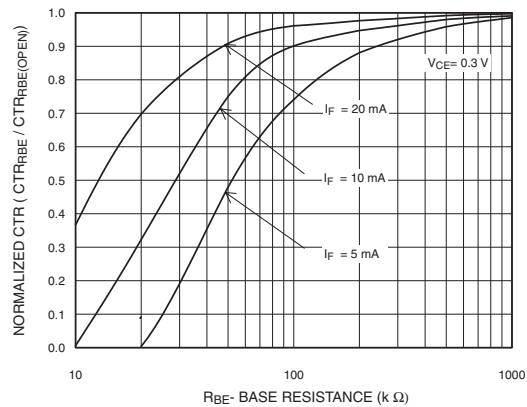

**Fig. 11 Collector-Emitter Saturation Voltage vs. Collector Current
(Black Package)**

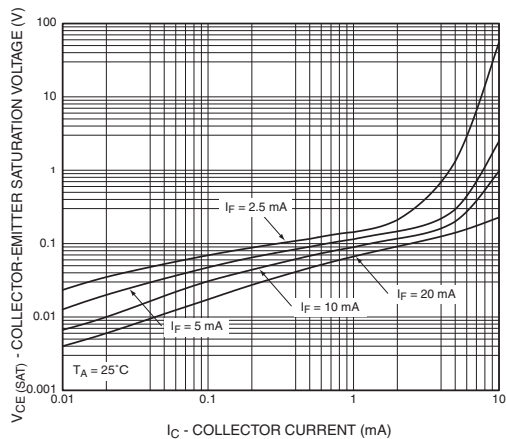

**Fig. 12 Collector-Emitter Saturation Voltage vs. Collector Current
(White Package)**

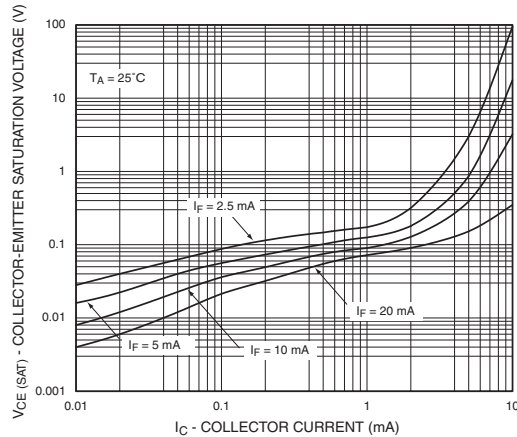


**MCT2
MCT2200**

**MCT2E
MCT2201**


**MCT210
MCT2202**

MCT271


**Fig. 13 Switching Speed vs. Load Resistor
(Black Package)**

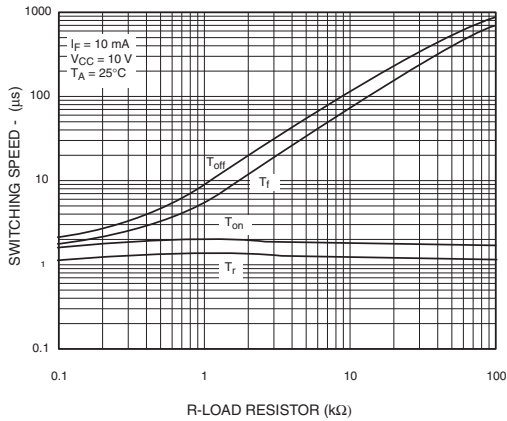


**Fig. 14 Switching Speed vs. Load Resistor
(White Package)**

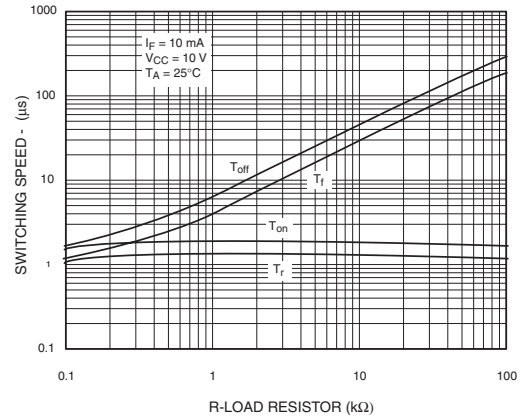


**Fig. 15 Normalized t_{on} vs. R_{BE}
(Black Package)**

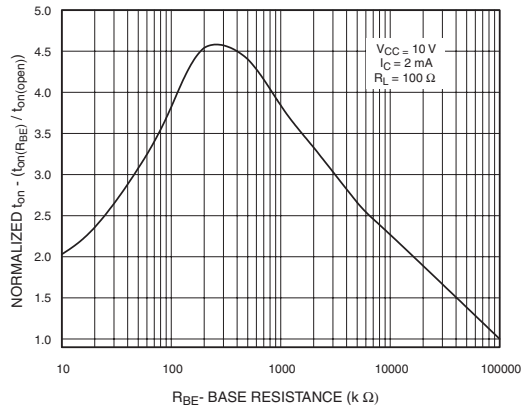


**Fig. 16 Normalized t_{on} vs. R_{BE}
(White Package)**

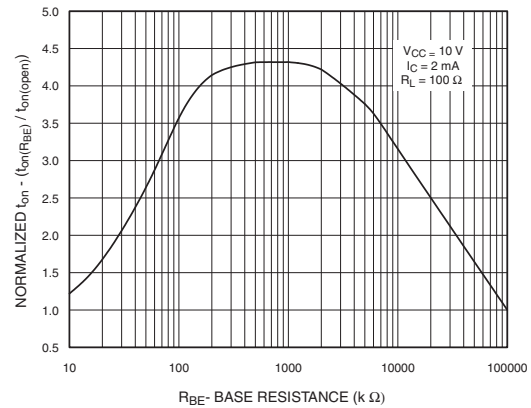

**Fig. 17 Normalized t_{off} vs. R_{BE}
(Black Package)**

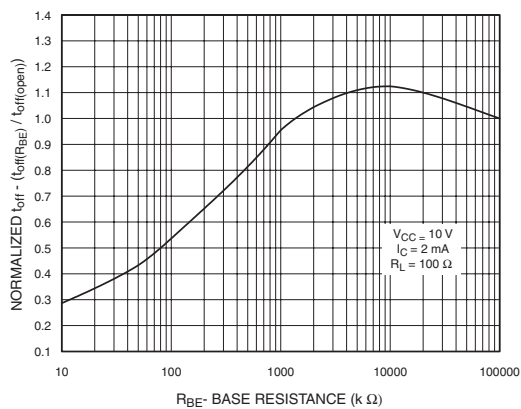

**Fig. 18 Normalized t_{off} vs. R_{BE}
(White Package)**

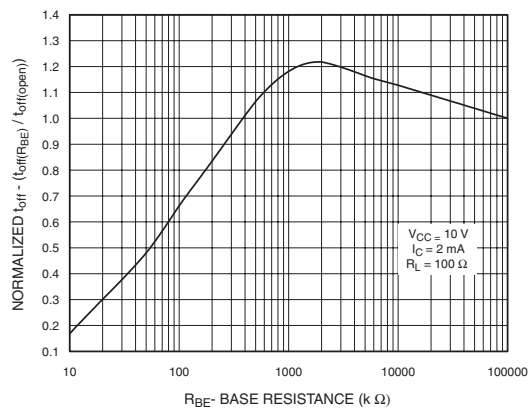

**MCT2
MCT2200**

**MCT2E
MCT2201**

**MCT210
MCT2202**

MCT271

Fig. 19 Dark Current vs. Ambient Temperature

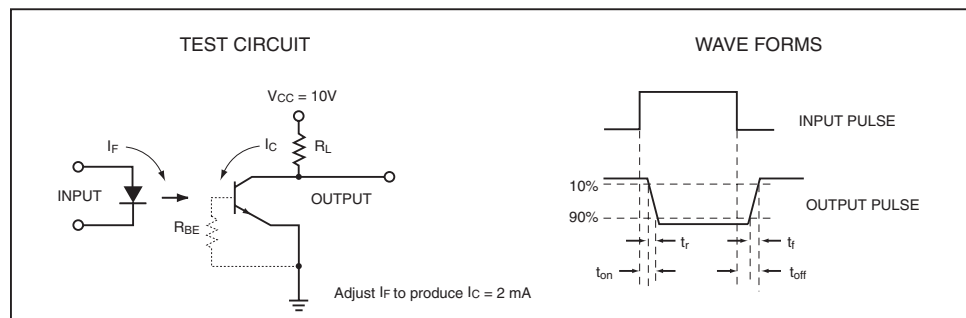
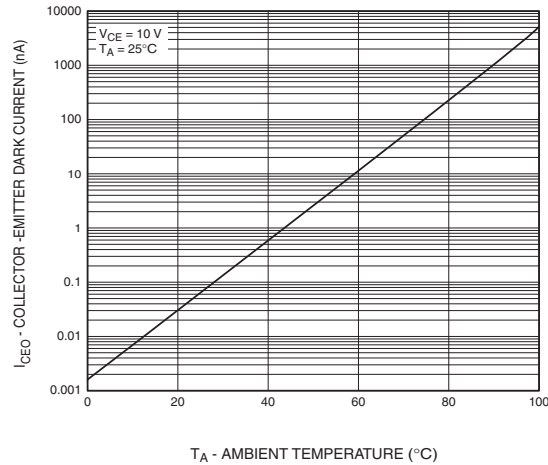


Figure 20. Switching Time Test Circuit and Waveforms

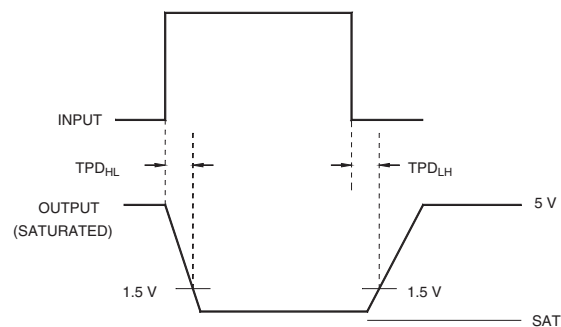


Figure 21. Switching Time Waveforms (MCT210)

**MCT2
MCT2200**


**MCT2E
MCT2201**

**MCT210
MCT2202**


MCT271

Black Package (No -M Suffix)


Package Dimensions (Through Hole)

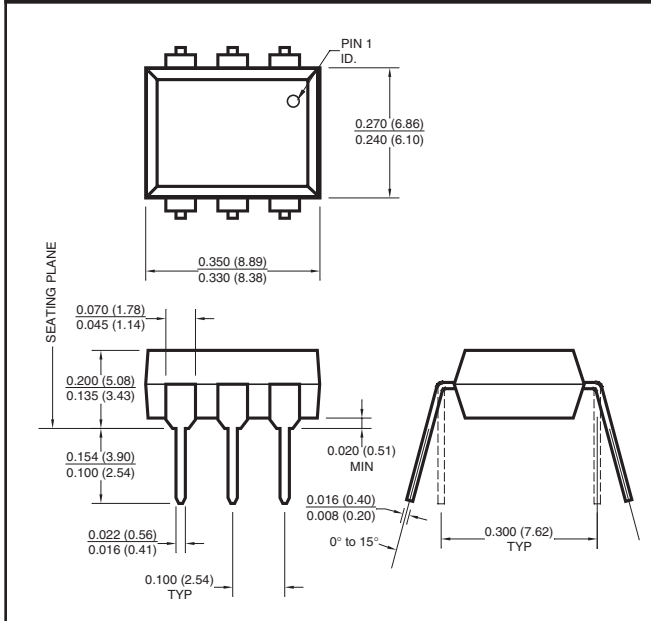


Package Dimensions (Surface Mount)

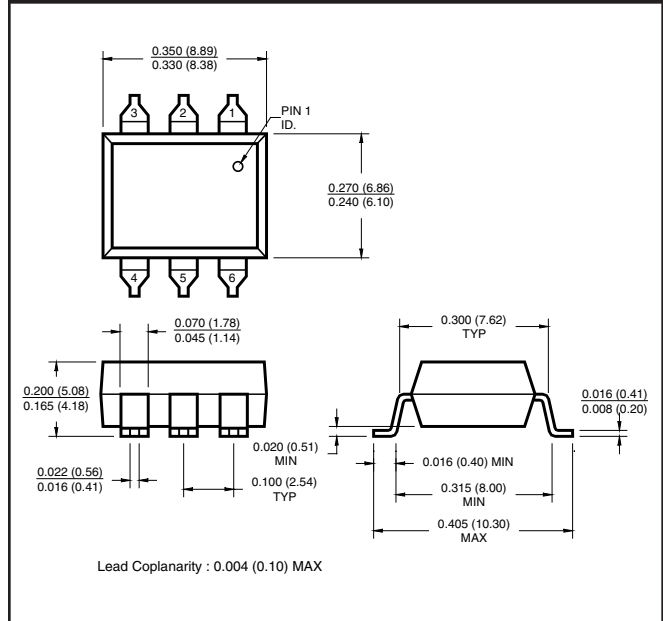

Package Dimensions (0.4" Lead Spacing)

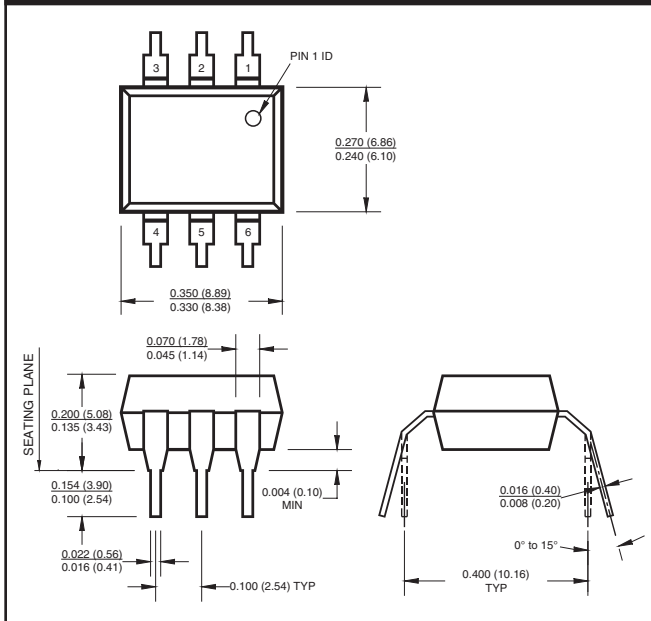

Recommended Pad Layout for Surface Mount Leadform

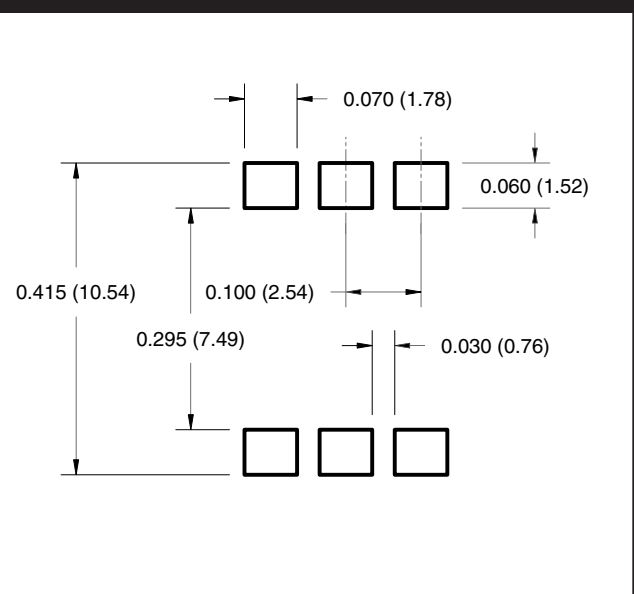

NOTE

All dimensions are in inches (millimeters)

**MCT2
MCT2200**


**MCT2E
MCT2201**

**MCT210
MCT2202**


MCT271

White Package (-M Suffix)


Package Dimensions (Through Hole)

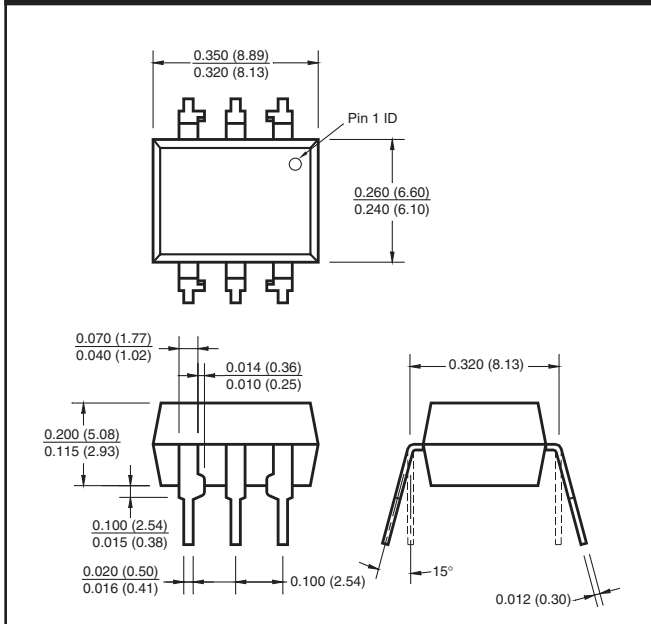


Package Dimensions (Surface Mount)

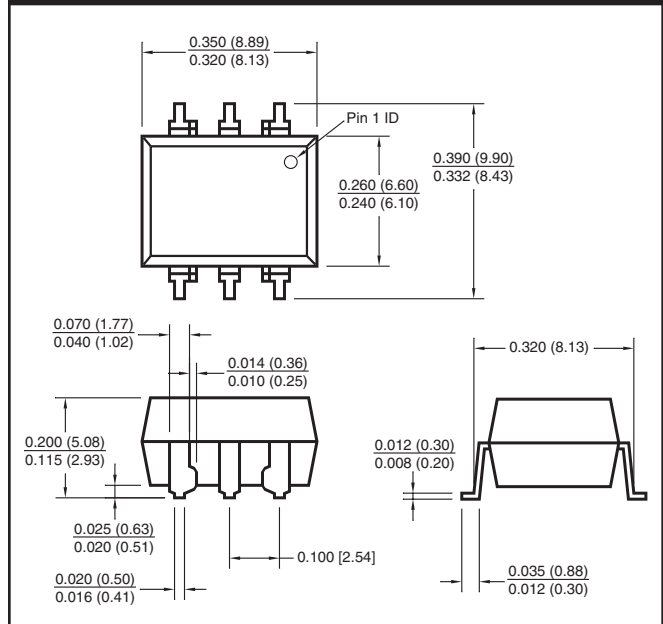

Package Dimensions (0.4" Lead Spacing)

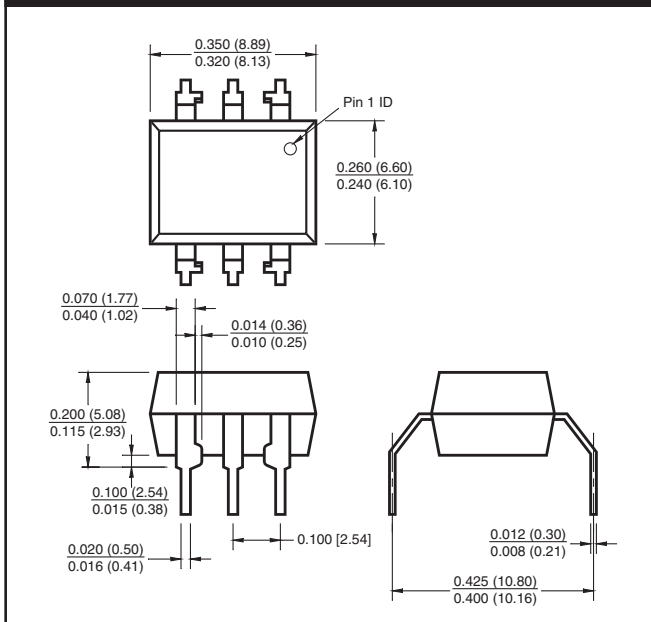

Recommended Pad Layout for Surface Mount Leadform

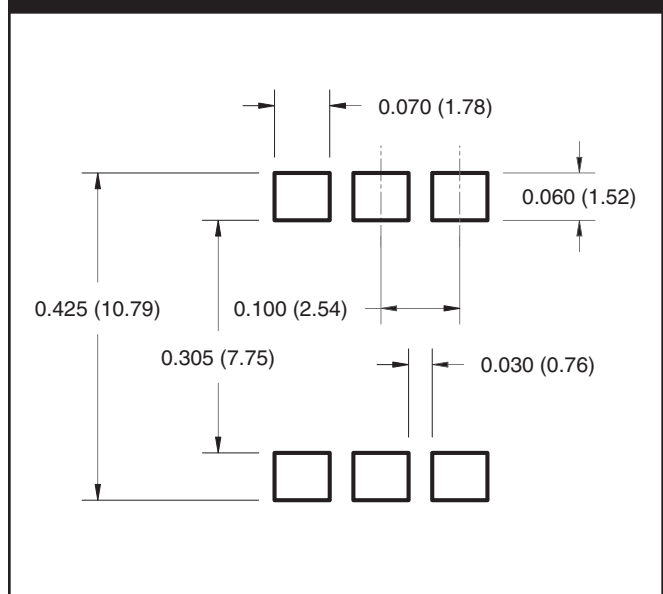

NOTE

All dimensions are in inches (millimeters)

MCT2
MCT2200

MCT2E
MCT2201


MCT210
MCT2202

MCT271


ORDERING INFORMATION

Order Entry Identifier		
Black Package (No Suffix)	White Package (-M Suffix)	Description
.S	S	Surface Mount Lead Bend
.SD	SR2	Surface Mount; Tape and reel
.W	T	0.4" Lead Spacing
.300	V	VDE 0884
.300W	TV	VDE 0884, 0.4" Lead Spacing
.3S	SV	VDE 0884, Surface Mount
.3SD	SR2V	VDE 0884, Surface Mount, Tape & Reel

MARKING INFORMATION

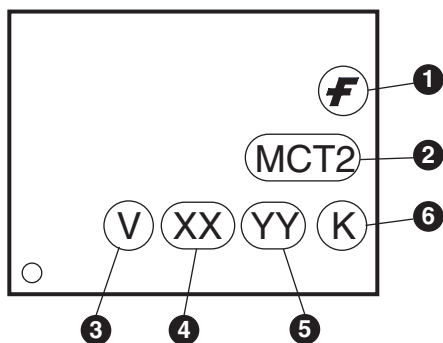

Black Package, No Suffix

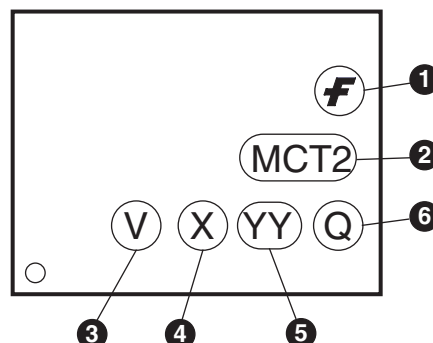

White Package, -M Suffix

Definitions	
1	Fairchild logo
2	Device number
3	VDE mark (Note: Only appears on parts ordered with VDE option – See order entry table)
4	One or two digit year code • Two digits for black package parts, e.g., '03' • One digit for white package parts, e.g., '3'
5	Two digit work week ranging from '01' to '53'
6	Assembly package code

*Note – Parts built in the white package (M suffix) that do not have the 'V' option (see definition 3 above) that are marked with date code '325' or earlier are marked in the portrait format.

Technical drawing of the front view of a 5-axis tool holder. The drawing shows a cylindrical body with a central bore and five side bores. Dimensions are given in millimeters with tolerances. Key features include a central bore with a diameter of 1.55 mm, five side bores with a diameter of 1.6 mm, and a central bore with a diameter of 1.6 mm. The drawing also shows the user direction of feed and various mounting features.

Dimensions and Tolerances:

- Overall length: 12.0 ± 0.1
- Distance from left face to first side bore: 4.85 ± 0.20
- Distance between side bores: 4.0 ± 0.1
- Distance from last side bore to right face: 4.0 ± 0.1
- Distance from left face to central bore: 10.30 ± 0.20
- Distance from central bore to right face: 1.75 ± 0.10
- Distance from left face to first side bore: 0.30 ± 0.05
- Distance from first side bore to central bore: 7.5 ± 0.1
- Distance from central bore to last side bore: 9.55 ± 0.20
- Distance from last side bore to right face: 16.0 ± 0.3
- Distance from left face to central bore: 13.2 ± 0.2
- Distance from central bore to right face: 0.1 MAX
- Central bore diameter: $\varnothing 1.55 \pm 0.05$
- Side bore diameter: $\varnothing 1.6 \pm 0.1$
- Central bore diameter: $\varnothing 1.6 \pm 0.1$

User Direction of Feed →

[illegible]


MCT2
MCT2200

MCT2E
MCT2201


MCT210
MCT2202

MCT271

Reflow Profile (White Package, -M Suffix)

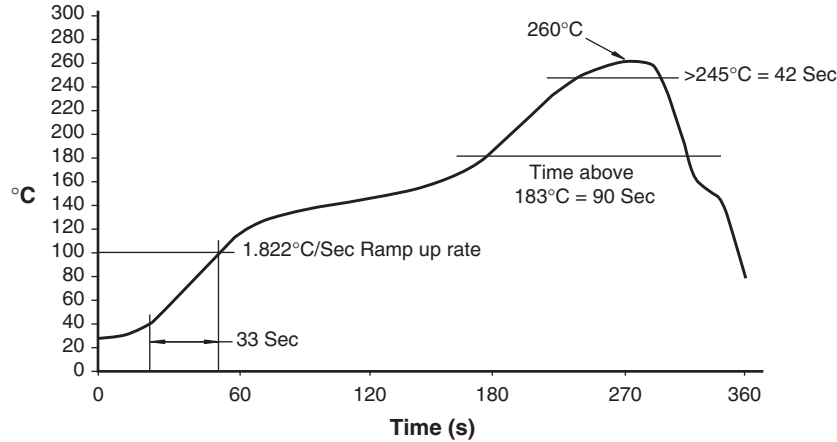

Reflow Profile (Black Package, No Suffix)

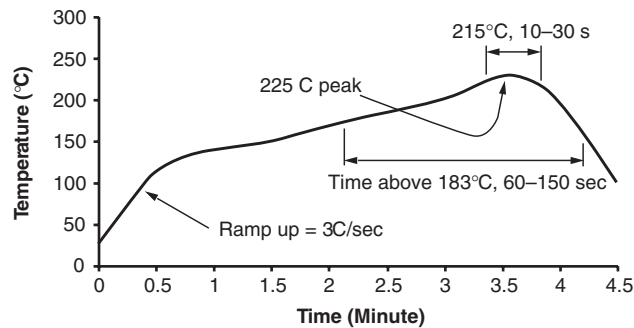

- Peak reflow temperature: 225°C (package surface temperature)
- Time of temperature higher than 183°C for 60-150 seconds
- One time soldering reflow is recommended

MCT2
MCT2200

MCT2E
MCT2201

MCT210
MCT2202

MCT271

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Home >> Find products >>

MCT2201

6-Pin DIP Phototransistor Output Optocoupler

Contents

- [General description](#)
- [Features](#)
- [Applications](#)
- [Ordering information](#)
- [Product status/pricing/packaging](#)
- [Order Samples](#)
- [Safety agency certificates](#)
- [Qualification Support](#)

General description

The MCT2XXX series optoisolators consist of a gallium arsenide infrared emitting diode driving a silicon phototransistor in a 6-pin dual in-line package.

[back to top](#)

Features

- UL recognized (File #E90700)
- VDE recognized (File #94766)
 - Add option V for white package (e.g., MCT2V-M)
 - Add option 300 for black package (e.g., MCT2.300)
- MCT2 and MCT2E are also available in white package by specifying -M suffix, eg. MCT2-M

[back to top](#)

Applications

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs

[back to top](#)

[BUY](#)

Datasheet

[Download this datasheet](#)



[e-mail this datasheet](#)



This page

[Print version](#)

Related Links

[Request samples](#)

[How to order products](#)

[Product Change Notices \(PCNs\)](#)

[Support](#)

[Sales support](#)

[Quality and reliability](#)

[Design center](#)

Ordering information

The following options can be ordered with this part:

Black Package (No Suffix) Order Entry Identifier	White Package (-m Suffix) Order Entry Identifier	Description
.S	S	Surface Mount Lead Bend
.SD	SR2	Surface Mount; Tape and Reel
.W	T	0.4" Lead Spacing
.300	V	VDE 0884
.300W	TV	VDE 0884, 0.4" Lead Spacing
.3S	SV	VDE 0884, Surface Mount
.3SD	SR2V	VDE 0884, Surface Mount. Tape and Reel

[back to top](#)

Product status/pricing/packaging

BUY

Product	Product status	Pb-free Status	Package type	Leads	Packing method
MCT2201	Lifetime Buy		DIP-B	6	BULK
MCT2201300	Lifetime Buy		DIP-B	6	BULK
MCT2201300W	Lifetime Buy		DIP-B	6	BULK
MCT2201S	Lifetime Buy		SMDIP-B	6	BULK
MCT2201SD	Lifetime Buy		SMDIP-B	6	TAPE REEL
MCT2201W	Lifetime Buy		DIP-B	6	BULK



Indicates product with Pb-free second-level interconnect. For more information [click here](#).

[back to top](#)

Safety agency certificates

Certificate	Agency
-------------	--------

E90700, Vol. 1 (936 K)	UL (1577)	Underwriters Laboratories Inc.
E90700, Vol. 1 (936 K)	C-UL	Underwriters Laboratories Inc.
0122085 (677 K)	SEMKO	SEMKO
P01101067 (1638 K)	NEMKO	NEMKO
FI 16812 (964 K)	FIMKO	FIMKO
310684-02 (623 K)	DEMKO	DEMKO Testing & Certification
1027742 (2305 K)	CSA	Canadian Standards Association
94766 (1673 K)	VDE	VDE Prüf-und Zertifizierungsinstitut

[back to top](#)

Qualification Support

Click on a product for detailed qualification data

Product
MCT2201
MCT2201300
MCT2201300W
MCT2201S
MCT2201SD
MCT2201W

[back to top](#)

© 2007 Fairchild Semiconductor

