



SS22H THRU SS210H

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 Volts


Forward Current - 2.0 Amperes

SMA/DO-214AC



FEATURES

- * Halogen-free type
- * For surface mount applications
- * Low profile package, Built-in strain relief
- * Metal silicon junction, majority carrier conduction
- * Low power loss, high efficiency
- * High current capability, low forward voltage drop
- * For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- * Guardring for overvoltage protection
- * High temperature soldering guaranteed : 260°C/10 seconds, at terminals
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0

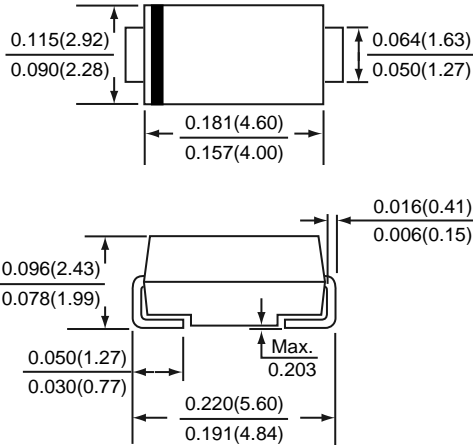

*Dimensions in inches and (millimeters)

MECHANICAL DATA

Case : JEDEC DO-214AC molded plastic body

Terminals : Tin plated, solderable per MIL-STD-750D Method 2026

Polarity : Color band denotes cathode end

Weight : 0.002 ounces , 0.064 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.		SYMBOLS	SS22H	SS24H	SS26H	SS210H	UNITS
Maximum repetitive peak reverse voltage		VRRM	20	40	60	100	Volts
Maximum RMS voltage		VRMS	14	28	42	70	Volts
Maximum DC blocking voltage		VDC	20	40	60	100	Volts
Maximum average forward rectified current (SEE FIG.1)		I(AV)	2.0				Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)		IFSM	50				Amps
Maximum instantaneous forward voltage at 2.0 A (NOTE 1)		VF	0.50		0.70	0.85	Volts
Maximum DC reverse current at rated DC blocking voltage (NOTE 1)	TA=25°C	IR	0.5				mA
	TA=100°C		20		10		
Typical thermal resistance (NOTE 2)	R θJA	75				°C / W	
	R θJL	17					
Operating junction temperature range		TJ	-65 to +125			-65 to +150	°C
Storage temperature range		TSTG	-65 to +150				°C

NOTES : (1) Pulse test : 300us pulse width, 1% duty cycle
 (2) P.C.B. mounted with 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES SS22H THRU SS210H

FIG.1 - FORWARD CURRENT DERATING CURVE

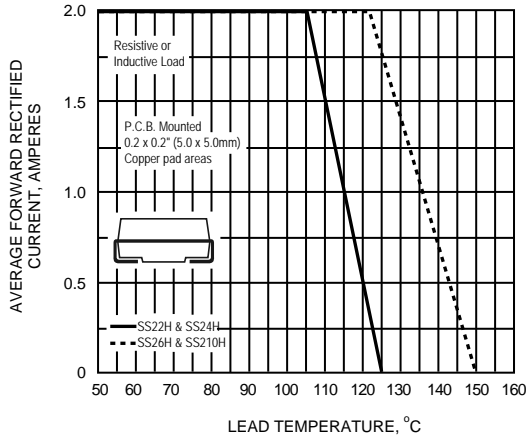


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

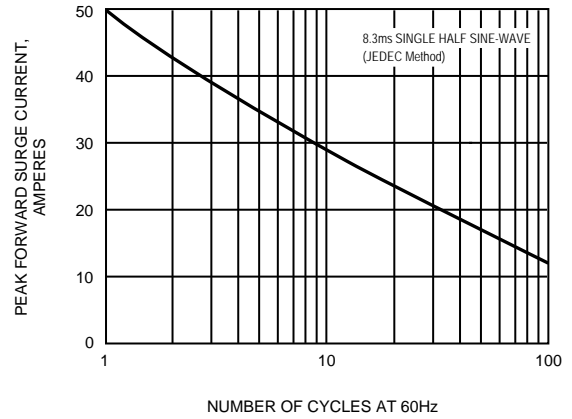


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

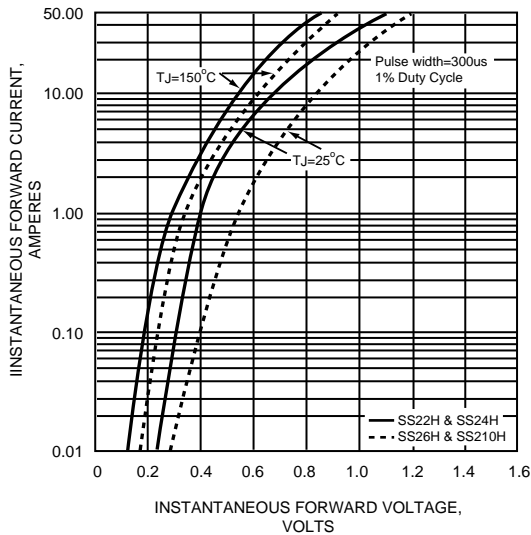


FIG.4 - TYPICAL REVERSE CURRENT CHARACTERISTICS

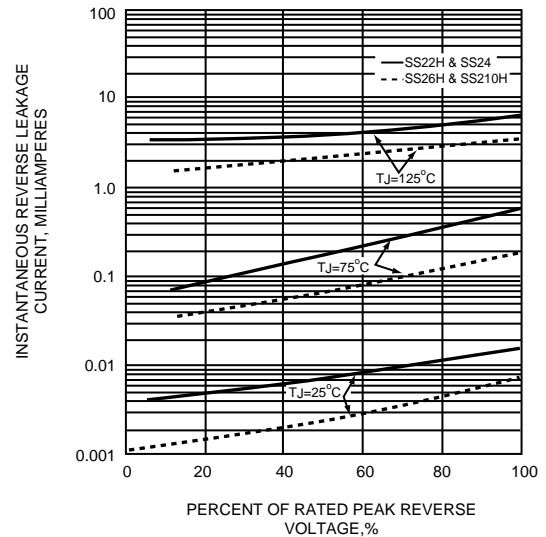


FIG.5 - TYPICAL JUNCTION CAPACITANCE

