


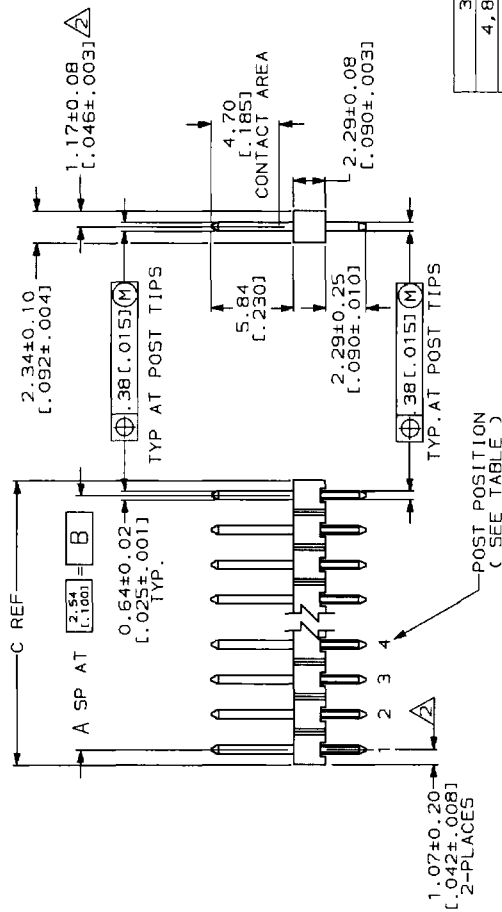

1. TRUE POSITION TOLERANCE OF THE POSTS TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.

2 THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING.

FINISH: 0.000127 [.000005] GOLD ON CONTACT AREA,
0.00254-0.00508 [.000100-.000200] TIN-LEAD ON SOLDER TAIL
ALL OVER 0.00127 [.000050] NICKEL.

	C	B	A	NO. OF ACTIVE POSN	NO. OF POSN	PART NUMBER
3,5,9,13,15	47.85 [1.684]	45.72 [1.800]	18	14	19	2-146218-6
4,8,12,16,20,24	68.17 [2.684]	66.04 [2.600]	26	21	27	2-146218-5
2,3,5,9,11,14,17,20,22	37.69 [1.384]	60.96 [2.400]	61	16	25	2-146218-4
2,9,11,14,17,20,22	60.55 [2.384]	58.42 [2.300]	23	17	24	2-146218-3
5,7,15	42.77 [1.684]	40.64 [1.600]	16	14	17	2-146218-2
3,4,9,15	42.77 [1.684]	40.64 [1.600]	16	13	17	2-146218-1
3,4,6,9,13,15,16	42.77 [1.684]	40.64 [1.600]	16	10	17	2-146218-0
2,6,9,11	32.61 [1.284]	30.48 [1.200]	12	9	13	1-146218-9
2,3	9.75 [1.384]	7.62 [1.300]	3	2	4	1-146218-8
4,8,12	37.69 [1.484]	35.56 [1.400]	14	12	15	1-146218-7
2,5,8,10,14,16,18	58.01 [2.284]	55.88 [2.200]	22	16	23	1-146218-6
2,5,8,10	32.61 [1.284]	30.48 [1.200]	12	9	13	1-146218-5
2,4,6,10	32.61 [1.284]	30.48 [1.200]	12	9	13	1-146218-4
4,8,12,16	47.85 [1.884]	45.72 [1.800]	18	15	19	1-146218-3
4,8	27.53 [1.084]	25.40 [1.000]	10	9	11	1-146218-2
3,4,7,9,12,14	42.77 [1.684]	40.64 [1.600]	16	11	17	1-146218-1
3,5,8,10	32.61 [1.284]	30.48 [1.200]	12	9	13	1-146218-0
5,7,12,14,17,19,21,25	68.17 [2.684]	66.04 [2.600]	26	19	27	146218-9
2,9,11,17,20,22,24	73.25 [2.884]	71.12 [2.800]	28	22	29	146218-8
4	17.37 [1.684]	15.24 [1.600]	6	6	7	146218-7
5,7,11,13,16,18,20,24	65.63 [2.584]	63.50 [2.500]	25	18	26	146218-6
3,5,9,13,15	42.77 [1.684]	40.64 [1.600]	16	12	17	146218-5
5,9,11	32.61 [1.284]	30.48 [1.200]	12	10	13	146218-4
4,6	19.91 [1.784]	17.78 [1.700]	7	6	8	146218-3
3,4,6,9,13,15	42.77 [1.684]	40.64 [1.600]	16	11	17	146218-2
3,4,6,9,15	42.77 [1.684]	40.64 [1.600]	16	12	17	146218-1
POST OMITTED	C	B	A	NO. OF ACTIVE POSN	NO. OF POSN	PART NUMBER

[illegible]

RECOMMENDED HOLE LAYOUT