

**SPECIFICATIONS**

**3 in 1 connector**

**Mechanical**


**Contact Retention Force:** 0.2kg min.  
**Card Retention Force:** 100gf min.  
**Card Insertion/Ejection Force:** 0.3Kgf to 1Kgf.  
**Durability:** 12000 Cycles

**2WX Series**

**Reverse, SMT Type**  
**Memory Stick+SD+MMC**

**Electrical**


**Voltage Rating:** 3.3V  
**Current Rating:** 0.5A  
**Contact Resistance:** 20mW max.  
**Insulation Resistance:** 1000MW  
**Low Level Contact Resistance:** 30 milliohms max.  
**Dielectric Withstanding Voltage:** 750 V AC RMS

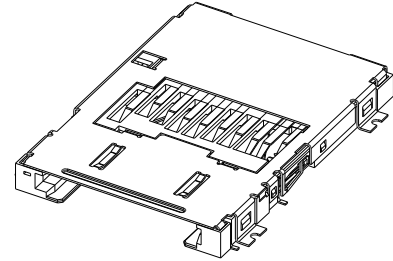

**Physical**

**Housing:** LCP, UL 94V-0 rated in Black Color  
**Contact:** Copper alloy  
**Operating Temperature:** -20°C to +85°C

**DRAWING**

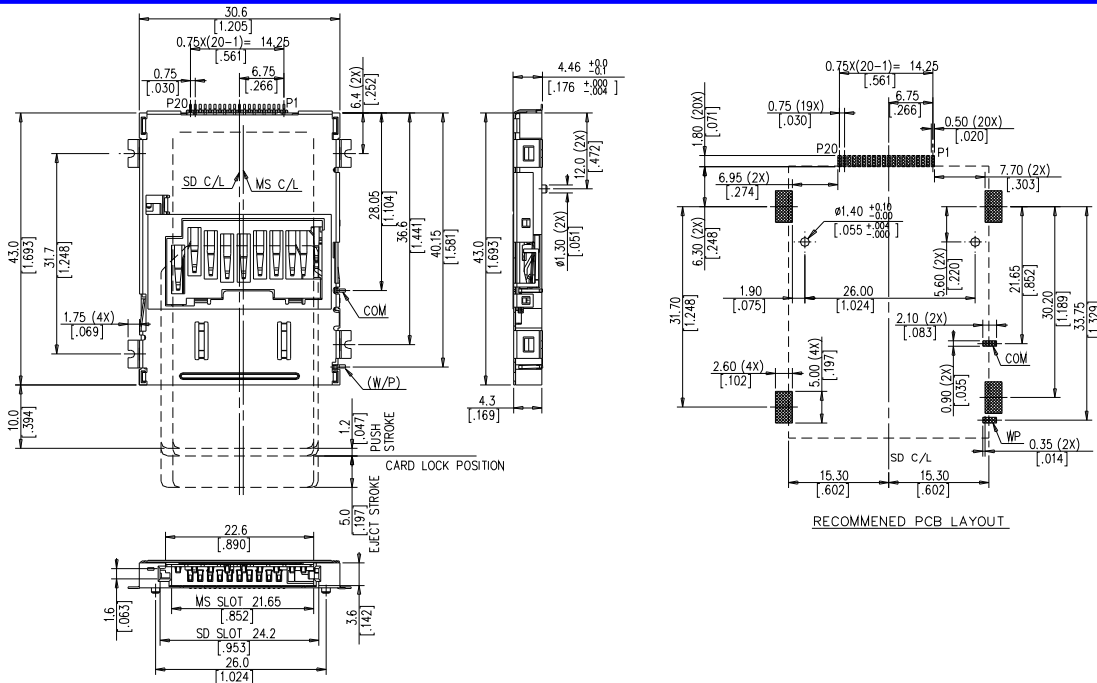

**ORDERING INFORMATION**

PRODUCT NO: 2W X \* \* \* \* \* - \* \* - \* \*

- Product Family: Multipart Memory Slots in 1 Connector
- Switch Type: 0=No Switch, 1=Normal Open, 2=Normal Close
- Deck Type: 1=Normal, 3=Reversed
- Cover Type: 1=w/ Shielding, 2=w/o Shielding
- Extension Code (by project)
- Connector Type: 11=SD+MMC+MS, 12=SD+MMC+MS+Smart Media, 13=SD+MMC+MS+xD
- Ejector Type: 0=Manual Type, 1=Push Push Type
- Standoff Height: 0=0.0 mm