

Product Specifications

F4A-PDMDM-1M-S4

FSJ4-50B SureFlex™ Jumper with interface types 7-16 DIN Male and 7-16 DIN Male, 1 m



CHARACTERISTICS


General Specifications

Body Style, Connector A	Straight
Body Style, Connector B	Straight
Cable Family	FSJ4-50B
Interface, Connector A	7-16 DIN Male
Interface, Connector B	7-16 DIN Male
Length	1.000 m 3.281 ft

Electrical Specifications

3rd Order IMD	-107.00 dBm
DTF, Connector A	-32.00 dB
DTF, Connector B	-32.00 dB

Jumper Assembly Sample Label

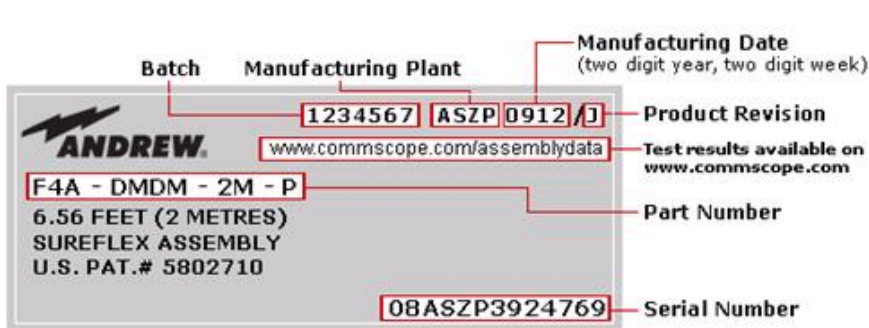

Return Loss/VSWR

Frequency Band	VSWR	Return Loss (dB)
450-2000 MHz	1.11	26.00

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant by Exemption

www.commscope.com/andrew

Product Specifications



F4A-PDMDM-1M-S4

China RoHS SJ/T 11364-2006
ISO 9001:2008

Above Maximum Concentration Value (MCV)
Designed, manufactured and/or distributed under this quality management system



INCLUDED PRODUCTS



FSJ4-50B

FSJ4-50B, HELIAX® Superflexible Foam Coaxial Cable, corrugated copper, 1/2 in, black PE jacket

www.commscope.com/andrew

©2011 CommScope, Inc. All rights reserved.

All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope. All specifications are subject to change.
See www.commscope.com/andrew for the most current information.

page 2 of 2
6/9/2011