





# STM4439

## P-Channel Enhancement Mode MOSFET

| PRODUCT SUMMARY  |                |                                |
|------------------|----------------|--------------------------------|
| V <sub>DSS</sub> | I <sub>D</sub> | R <sub>DS(ON)</sub> ( mΩ ) Max |
| -30V             | -15A           | 8.5 @ V <sub>GS</sub> = -10V   |
|                  |                | 12 @ V <sub>GS</sub> = -4.5V   |

### FEATURES

- Super high dense cell design for low R<sub>DS(ON)</sub>.
- Rugged and reliable.
- Surface Mount Package.



### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C unless otherwise noted)

| Parameter                                                                            | Symbol                            | Limit      | Unit |
|--------------------------------------------------------------------------------------|-----------------------------------|------------|------|
| Drain-Source Voltage                                                                 | V <sub>DS</sub>                   | -30        | V    |
| Gate-Source Voltage                                                                  | V <sub>GS</sub>                   | ±25        | V    |
| Drain Current-Continuous <sup>a</sup> @ T <sub>J</sub> =25°C<br>-Pulsed <sup>b</sup> | I <sub>D</sub>                    | -15        | A    |
|                                                                                      | I <sub>DM</sub>                   | -75        | A    |
| Drain-Source Diode Forward Current <sup>a</sup>                                      | I <sub>S</sub>                    | -1.7       | A    |
| Maximum Power Dissipation <sup>a</sup>                                               | P <sub>D</sub>                    | 2.5        | W    |
| Operating Junction and Storage Temperature Range                                     | T <sub>J</sub> , T <sub>STG</sub> | -55 to 150 | °C   |

### THERMAL CHARACTERISTICS

|                                                      |                  |    |      |
|------------------------------------------------------|------------------|----|------|
| Thermal Resistance, Junction-to-Ambient <sup>a</sup> | R <sub>θJA</sub> | 50 | °C/W |
|------------------------------------------------------|------------------|----|------|

# STM4439

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> =25°C unless otherwise noted)

| Parameter                              | Symbol              | Condition                                                                                                 | Min  | Typ <sup>c</sup> | Max  | Unit  |
|----------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------|------|------------------|------|-------|
| OFF CHARACTERISTICS                    |                     |                                                                                                           |      |                  |      |       |
| Drain-Source Breakdown Voltage         | BV <sub>DSS</sub>   | V <sub>GS</sub> = 0V, I <sub>D</sub> = -250uA                                                             | -30  |                  |      | V     |
| Zero Gate Voltage Drain Current        | I <sub>DSS</sub>    | V <sub>DS</sub> = -24V, V <sub>GS</sub> = 0V                                                              |      |                  | -1   | uA    |
| Gate-Body Leakage                      | I <sub>GSS</sub>    | V <sub>GS</sub> = ±25V, V <sub>DS</sub> = 0V                                                              |      |                  | ±100 | nA    |
| ON CHARACTERISTICS <sup>b</sup>        |                     |                                                                                                           |      |                  |      |       |
| Gate Threshold Voltage                 | V <sub>GS(th)</sub> | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = -250uA                                               | -1.4 |                  | -2.6 | V     |
| Drain-Source On-State Resistance       | R <sub>DS(ON)</sub> | V <sub>GS</sub> = -10V, I <sub>D</sub> = -12A                                                             |      |                  | 8.5  | m-ohm |
|                                        |                     | V <sub>GS</sub> = -4.5V, I <sub>D</sub> = -10A                                                            |      |                  | 12   | m-ohm |
| On-State Drain Current                 | I <sub>D(ON)</sub>  | V <sub>DS</sub> = -5V, V <sub>GS</sub> = -10V                                                             | -10  |                  |      | A     |
| Forward Transconductance               | g <sub>FS</sub>     | V <sub>DS</sub> = -5V, I <sub>D</sub> = -10A                                                              |      | 15               |      | S     |
| DYNAMIC CHARACTERISTICS <sup>c</sup>   |                     |                                                                                                           |      |                  |      |       |
| Input Capacitance                      | C <sub>ISS</sub>    | V <sub>DS</sub> = -15V, V <sub>GS</sub> = 0V<br>f = 1.0MHz                                                |      | 4591             |      | pF    |
| Output Capacitance                     | C <sub>OSS</sub>    |                                                                                                           |      | 996              |      | pF    |
| Reverse Transfer Capacitance           | C <sub>RSS</sub>    |                                                                                                           |      | 409              |      | pF    |
| SWITCHING CHARACTERISTICS <sup>c</sup> |                     |                                                                                                           |      |                  |      |       |
| Turn-On Delay Time                     | t <sub>D(ON)</sub>  | V <sub>D</sub> = -15V,<br>I <sub>D</sub> = -12A,<br>V <sub>GEN</sub> = - 10V,<br>R <sub>GEN</sub> = 3 ohm |      | 64.9             |      | ns    |
| Rise Time                              | t <sub>r</sub>      |                                                                                                           |      | 16.4             |      | ns    |
| Turn-Off Delay Time                    | t <sub>D(OFF)</sub> |                                                                                                           |      | 226.2            |      | ns    |
| Fall Time                              | t <sub>f</sub>      |                                                                                                           |      | 87.3             |      | ns    |
| Total Gate Charge                      | Q <sub>g</sub>      | V <sub>DS</sub> = -15V, I <sub>D</sub> = -12A, V <sub>GS</sub> = -10V                                     |      | 84.3             |      | nC    |
|                                        |                     | V <sub>DS</sub> = -15V, I <sub>D</sub> = -12A, V <sub>GS</sub> = -4.5V                                    |      | 42.4             |      | nC    |
| Gate-Source Charge                     | Q <sub>gs</sub>     | V <sub>DS</sub> = -15V, I <sub>D</sub> = -12A,<br>V <sub>GS</sub> = -10V                                  |      | 15.9             |      | nC    |
| Gate-Drain Charge                      | Q <sub>gd</sub>     |                                                                                                           |      | 16.2             |      | nC    |

# STM4439

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C unless otherwise noted)

| Parameter                                       | Symbol          | Condition                                    | Min | Typ <sup>c</sup> | Max  | Unit |
|-------------------------------------------------|-----------------|----------------------------------------------|-----|------------------|------|------|
| DRAIN-SOURCE DIODE CHARACTERISTICS <sup>b</sup> |                 |                                              |     |                  |      |      |
| Diode Forward Voltage                           | V <sub>SD</sub> | V <sub>GS</sub> = 0V, I <sub>S</sub> = -1.7A |     | -0.71            | -1.2 | V    |

### Notes

- a.Surface Mounted on FR4 Board, t<=10sec.
- b.Pulse Test:Pulse Width<=300us, Duty Cycle<= 2%.
- c.Guaranteed by design, not subject to production testing.

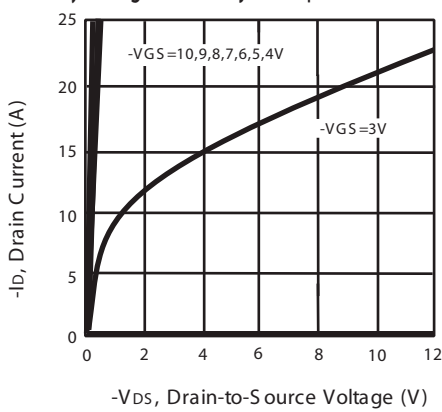


Figure 1. Output Characteristics

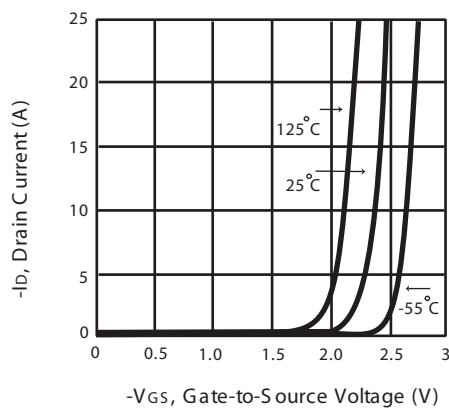


Figure 2. Transfer Characteristics

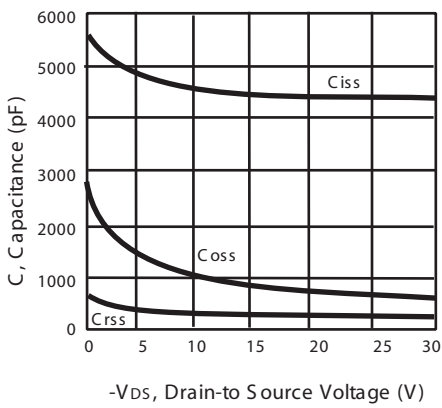


Figure 3. Capacitance

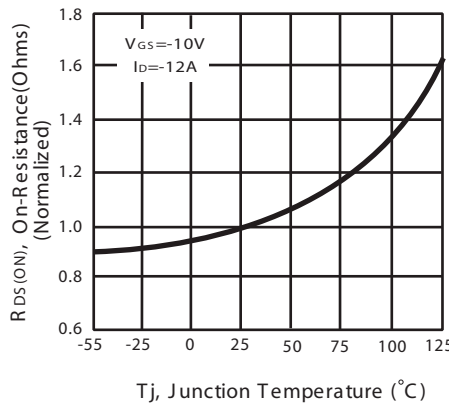


Figure 4. On-Resistance Variation with Temperature

# STM4439

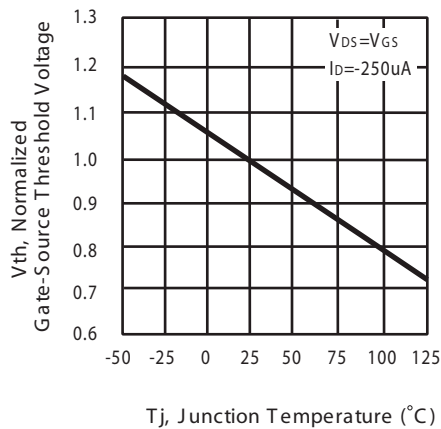


Figure 5. Gate Threshold Variation with Temperature

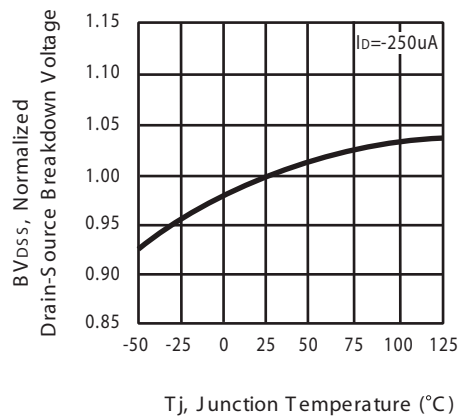


Figure 6. Breakdown Voltage Variation with Temperature

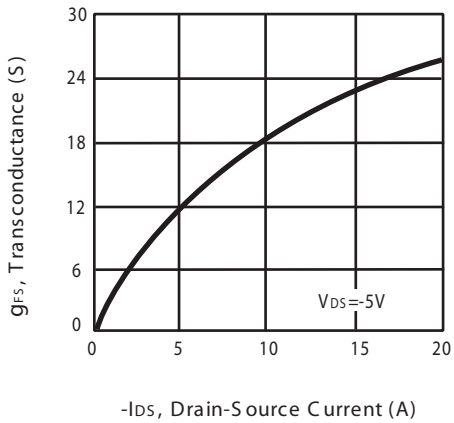


Figure 7. Transconductance Variation with Drain Current

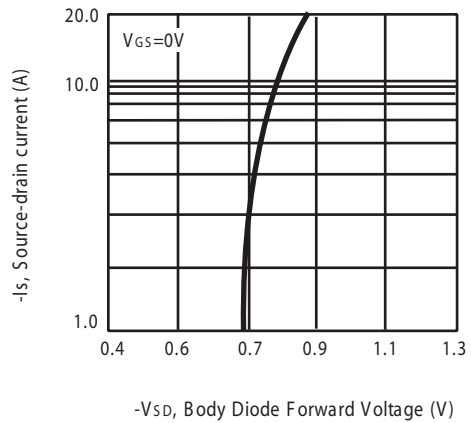


Figure 8. Body Diode Forward Voltage Variation with Source Current

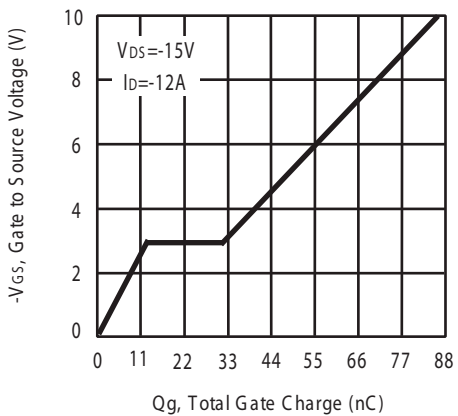


Figure 9. Gate Charge

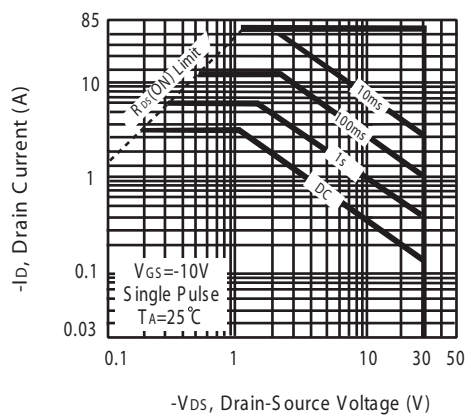


Figure 10. Maximum Safe Operating Area

# STM4439

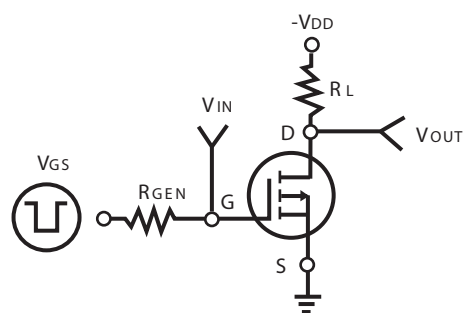


Figure 11. Switching Test Circuit

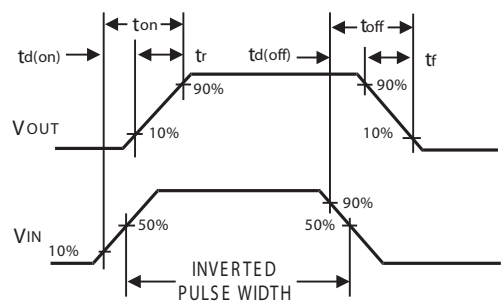


Figure 12. Switching Waveforms


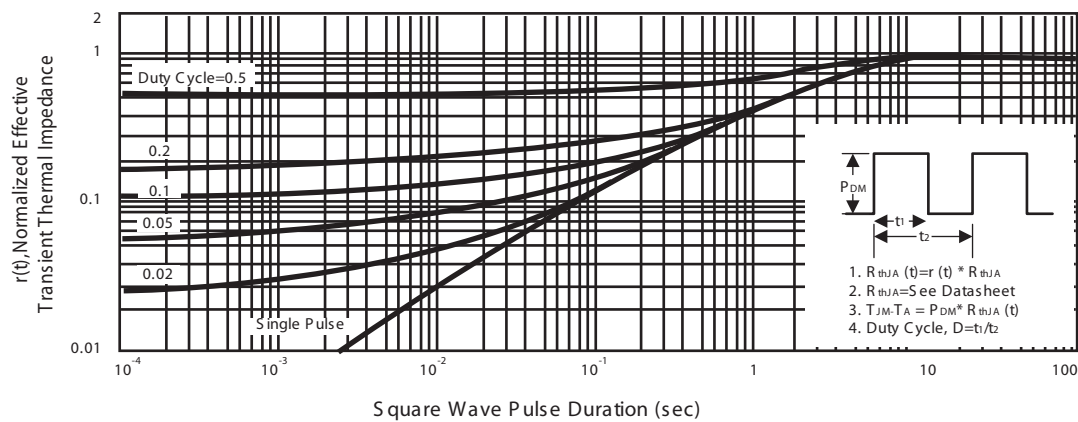


Figure 13. Normalized Thermal Transient Impedance Curve

# STM4439

## PACKAGE OUTLINE DIMENSIONS

### SO-8

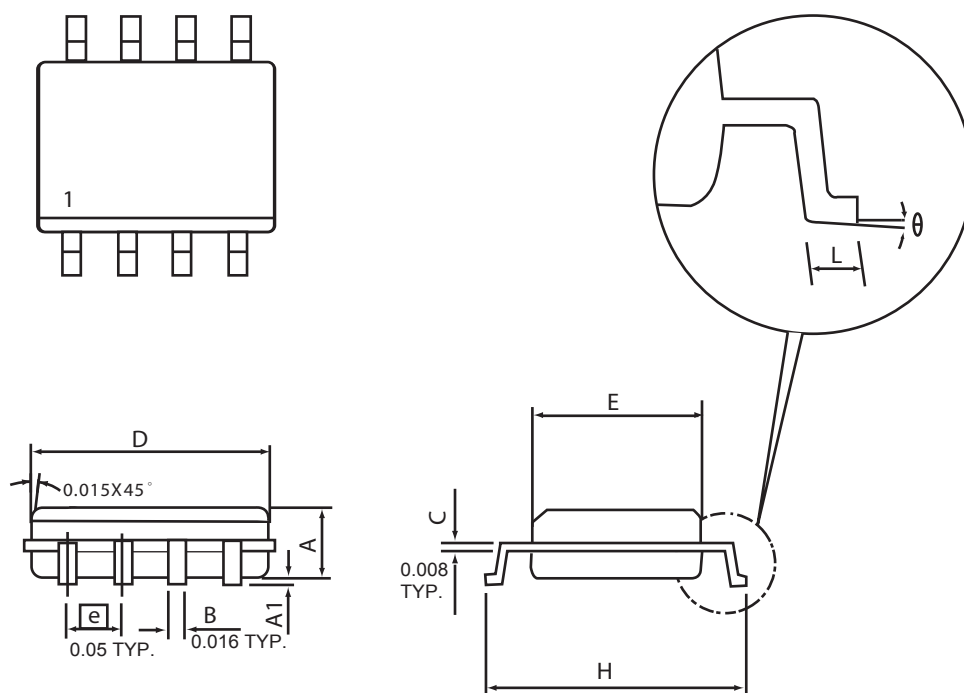


| SYMBOLS  | MILLIMETERS |      | INCHES |       |
|----------|-------------|------|--------|-------|
|          | MIN         | MAX  | MIN    | MAX   |
| A        | 1.35        | 1.75 | 0.053  | 0.069 |
| A1       | 0.10        | 0.25 | 0.004  | 0.010 |
| D        | 4.80        | 4.98 | 0.189  | 0.196 |
| E        | 3.81        | 3.99 | 0.150  | 0.157 |
| H        | 5.79        | 6.20 | 0.228  | 0.244 |
| L        | 0.41        | 1.27 | 0.016  | 0.050 |
| $\theta$ | 0°          | 8°   | 0°     | 8°    |

# STM4439

## SO-8 Tape and Reel Data


### SO-8 Carrier Tape

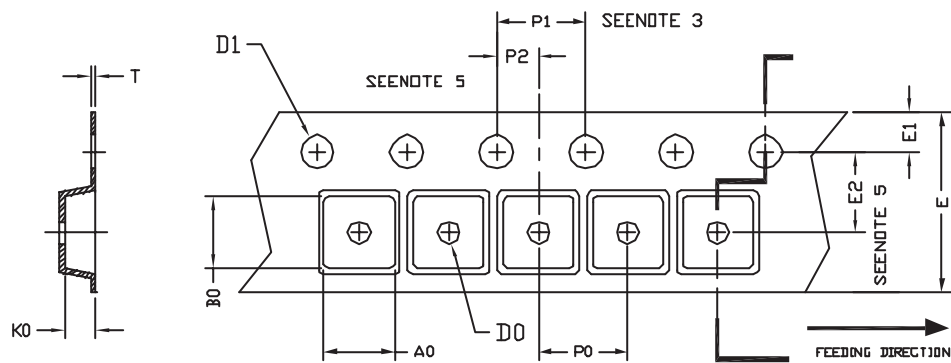

unit:mm

| PACKAGE          | A0   | B0   | K0   | D0                  | D1                           | E                 | E1   | E2                | P0  | P1  | P2                | T                 |
|------------------|------|------|------|---------------------|------------------------------|-------------------|------|-------------------|-----|-----|-------------------|-------------------|
| SOP 8N<br>150mil | 6.40 | 5.20 | 2.10 | $\phi 1.5$<br>(MIN) | $\phi 1.5$<br>+ 0.1<br>- 0.0 | 12.0<br>$\pm 0.3$ | 1.75 | 5.5<br>$\pm 0.05$ | 8.0 | 4.0 | 2.0<br>$\pm 0.05$ | 0.3<br>$\pm 0.05$ |

### SO-8 Reel

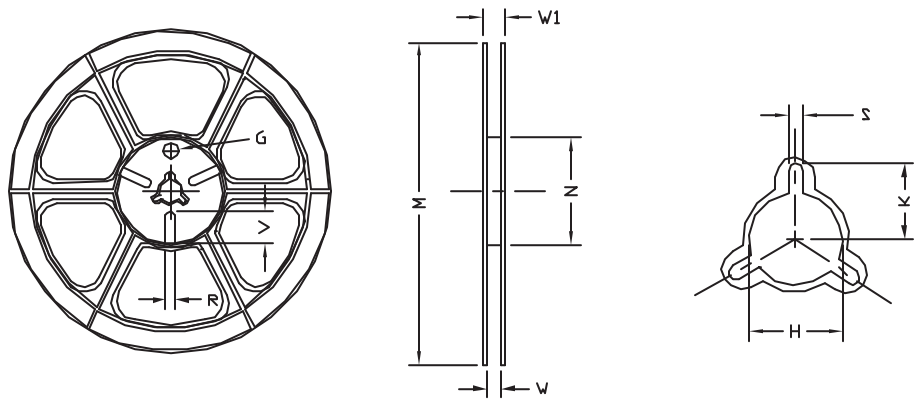

UNIT:mm

| TAPE SIZE | REEL SIZE  | M              | N               | W             | W1            | H                      | K   | S                 | G   | R   | V   |
|-----------|------------|----------------|-----------------|---------------|---------------|------------------------|-----|-------------------|-----|-----|-----|
| 12 mm     | $\phi 330$ | 330<br>$\pm 1$ | 62<br>$\pm 1.5$ | 12.4<br>+ 0.2 | 16.8<br>- 0.4 | $\phi 12.75$<br>+ 0.15 | --- | 2.0<br>$\pm 0.15$ | --- | --- | --- |