

NEC**BIPOLAR ANALOG INTEGRATED CIRCUIT** **μ PC78N00 SERIES****THREE TERMINAL POSITIVE VOLTAGE REGULATOR****DESCRIPTION**

μ PC78N00 series are monolithic three terminal positive regulators which employ internally current limiting, thermal shut down, output transistor safe operating area protection make them essentially indestructible.

They are intended as fixed voltage regulators in a wide range of application including local on card regulation for elimination of distribution problems associated with single point regulation.



FEATURES

- Output current in excess of 300 mA.
- Built-in some protection circuits.
(over current protection, SOA protection and thermal shut down)
- Small package, TO-126

ORDER INFORMATION

Type Number	Output Voltage	Package	Quality Grade
μ PC78N05H	5 V	TO-126	Standard
μ PC78N08H	8 V		
μ PC78N10H	10 V		
μ PC78N12H	12 V		
μ PC78N15H	15 V		
μ PC78N18H	18 V		
μ PC78N24H	24 V		

Please refer to "Quality grade on NEC Semiconductor Devices" (Document number IEI-1209) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

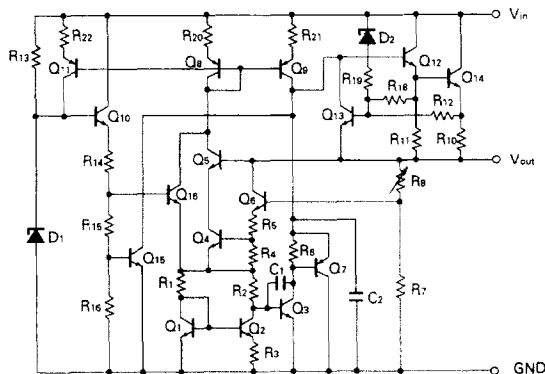EQUIVALENT CIRCUIT**CONNECTION DIAGRAM**


ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Input Voltage	V_{IN}	35/40 (Note1)	V
Internal Power Dissipation	P_T	12.5 (Note2)	W
Operating Ambient Temperature Range	T_{opt}	-20 to +85	$^\circ\text{C}$
Operating Junction Temperature Range	$T_{opt(j)}$	-20 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$
Thermal Resistance (junction to case)	$R_{th(j-c)}$	10	$^\circ\text{C/W}$
Thermal Resistance (junction to ambient)	$R_{th(j-a)}$	110	$^\circ\text{C/W}$

(Note 1) μ PC78N05, 08, 10, 12, 15, 18 : 35 V, μ PC78N24 : 40 V

(Note 2) Internally limited

TYPICAL CONNECTION

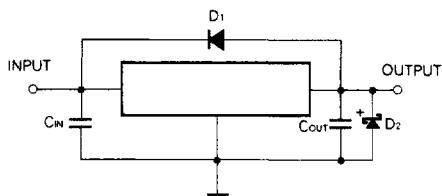

C1: Required if regulator is located an appreciable distance from power supply filter

C2: More than 0.1 μ F

D1: Needed for $V_{IN} < V_O$

D2: Needed for $V_O < \text{GND}$

RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	TYPE NUMBER	MIN.	TYP.	MAX.	UNIT
Input Voltage	V_{IN}	μ PC78N05H	7	10	25	V
		μ PC78N08H	10.5	14	25	
		μ PC78N10H	12.5	17	30	
		μ PC78N12H	14.5	19	30	
		μ PC78N15H	17.5	23	30	
		μ PC78N18H	21	27	33	
		μ PC78N24H	27	33	38	
Output Current	I_O	All	0		300	mA
Operating Temperature Range	T_{opt}	All	-20		+85	$^\circ\text{C}$
Operating Junction Temperature Range	$T_{opt(j)}$	All	-20		+125	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS μPC78N05

($V_{IN} = 10\text{ V}$, $I_O = 200\text{ mA}$, $0\text{ }^{\circ}\text{C} \leq T_J \leq +125\text{ }^{\circ}\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_O	$T_J = 25\text{ }^{\circ}\text{C}$	4.8	5.0	5.2	V
		$7\text{ V} \leq V_{IN} \leq 20\text{ V}$, $5\text{ mA} \leq I_O \leq 200\text{ mA}$	4.75		5.25	
Line Regulation	REG_{IN}	$T_J = 25\text{ }^{\circ}\text{C}$, $7\text{ V} \leq V_{IN} \leq 25\text{ V}$		15	50	mV
		$T_J = 25\text{ }^{\circ}\text{C}$, $8\text{ V} \leq V_{IN} \leq 20\text{ V}$		10	25	
Load Regulation	REG_L	$T_J = 25\text{ }^{\circ}\text{C}$, $1\text{ mA} \leq I_O \leq 300\text{ mA}$		6	100	mV
		$T_J = 25\text{ }^{\circ}\text{C}$, $5\text{ mA} \leq I_O \leq 200\text{ mA}$		4	50	
Quiescent Current	I_{BIAS}	$T_J = 25\text{ }^{\circ}\text{C}$		3.5	5.0	mA
Quiescent Current Change	ΔI_{BIAS}	$7\text{ V} \leq V_{IN} \leq 25\text{ V}$			0.8	mA
		$1\text{ mA} \leq I_O \leq 300\text{ mA}$			0.5	
Output Noise Voltage	V_n	$T_J = 25\text{ }^{\circ}\text{C}$, $10\text{ Hz} \leq f \leq 100\text{ kHz}$		50	120	$\mu\text{V}_{r.m.s.}$
Ripple Rejection	$R \cdot R$	$T_J = 25\text{ }^{\circ}\text{C}$, $f = 120\text{ Hz}$, $8\text{ V} \leq V_{IN} \leq 18\text{ V}$	62	70		dB
Dropout Voltage	V_{DIF}	$T_J = 25\text{ }^{\circ}\text{C}$		1.7		V
Short Circuit Current	I_{Oshort}	$T_J = 25\text{ }^{\circ}\text{C}$, $V_{IN} = 25\text{ V}$		170		mA
Peak Output Current	I_{Opeak}	$T_J = 25\text{ }^{\circ}\text{C}$	360	500	640	mA
Temperature coefficient of Output Voltage	$\Delta V_O / \Delta T$	$I_O = 5\text{ mA}$		0.1		$\text{mV}/^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS μPC78N08

($V_{IN} = 14\text{ V}$, $I_O = 200\text{ mA}$, $0\text{ }^{\circ}\text{C} \leq T_J \leq +125\text{ }^{\circ}\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_O	$T_J = 25\text{ }^{\circ}\text{C}$	7.7	8.0	8.3	V
		$10.5\text{ V} \leq V_{IN} \leq 23\text{ V}$, $5\text{ mA} \leq I_O \leq 200\text{ mA}$	7.6		8.4	
Line Regulation	REG_{IN}	$T_J = 25\text{ }^{\circ}\text{C}$, $10.5\text{ V} \leq V_{IN} \leq 25\text{ V}$		18	80	mV
		$T_J = 25\text{ }^{\circ}\text{C}$, $12\text{ V} \leq V_{IN} \leq 23\text{ V}$		13	40	
Load Regulation	REG_L	$T_J = 25\text{ }^{\circ}\text{C}$, $1\text{ mA} \leq I_O \leq 300\text{ mA}$		8	160	mV
		$T_J = 25\text{ }^{\circ}\text{C}$, $5\text{ mA} \leq I_O \leq 200\text{ mA}$		6	80	
Quiescent Current	I_{BIAS}	$T_J = 25\text{ }^{\circ}\text{C}$		3.5	5.0	mA
Quiescent Current Change	ΔI_{BIAS}	$10.5\text{ V} \leq V_{IN} \leq 25\text{ V}$			0.8	mA
		$1\text{ mA} \leq I_O \leq 300\text{ mA}$			0.5	
Output Noise Voltage	V_n	$T_J = 25\text{ }^{\circ}\text{C}$, $10\text{ Hz} \leq f \leq 100\text{ kHz}$		65	190	$\mu\text{V}_{r.m.s.}$
Ripple Rejection	$R \cdot R$	$T_J = 25\text{ }^{\circ}\text{C}$, $f = 120\text{ Hz}$, $11\text{ V} \leq V_{IN} \leq 21\text{ V}$	56	68		dB
Dropout Voltage	V_{DIF}	$T_J = 25\text{ }^{\circ}\text{C}$		1.7		V
Short Circuit Current	I_{Oshort}	$T_J = 25\text{ }^{\circ}\text{C}$, $V_{IN} = 25\text{ V}$		170		mA
Peak Output Current	I_{Opeak}	$T_J = 25\text{ }^{\circ}\text{C}$	360	490	640	mA
Temperature coefficient of Output Voltage	$\Delta V_O / \Delta T$	$I_O = 5\text{ mA}$		0.2		$\text{mV}/^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS μ PC78N10

($V_{IN} = 17\text{ V}$, $I_O = 200\text{ mA}$, $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_O	$T_J = 25^\circ\text{C}$	9.6	10	10.4	V
		$12.5\text{ V} \leq V_{IN} \leq 25\text{ V}$, $5\text{ mA} \leq I_O \leq 200\text{ mA}$	9.5		10.5	
Line Regulation	REG_{IN}	$T_J = 25^\circ\text{C}$, $12.5\text{ V} \leq V_{IN} \leq 30\text{ V}$		25	100	mV
		$T_J = 25^\circ\text{C}$, $13\text{ V} \leq V_{IN} \leq 25\text{ V}$		17	50	
Load Regulation	REG_L	$T_J = 25^\circ\text{C}$, $1\text{ mA} \leq I_O \leq 300\text{ mA}$		12	200	mV
		$T_J = 25^\circ\text{C}$, $5\text{ mA} \leq I_O \leq 200\text{ mA}$		8	100	
Quiescent Current	I_{BIAS}	$T_J = 25^\circ\text{C}$		3.6	5.0	mA
Quiescent Current Change	ΔI_{BIAS}	$13\text{ V} \leq V_{IN} \leq 30\text{ V}$			0.8	mA
		$1\text{ mA} \leq I_O \leq 300\text{ mA}$			0.5	
Output Noise Voltage	V_n	$T_J = 25^\circ\text{C}$, $10\text{ Hz} \leq f \leq 100\text{ kHz}$		80	230	$\mu\text{V}_{r.m.s.}$
Ripple Rejection	$R \cdot R$	$T_J = 25^\circ\text{C}$, $f = 120\text{ Hz}$, $13\text{ V} \leq V_{IN} \leq 23\text{ V}$	56	66		dB
Dropout Voltage	V_{DIF}	$T_J = 25^\circ\text{C}$		1.7		V
Short Circuit Current	I_{Oshort}	$T_J = 25^\circ\text{C}$, $V_{IN} = 30\text{ V}$		100		mA
Peak Output Current	I_{Opeak}	$T_J = 25^\circ\text{C}$	360	480	640	mA
Temperature coefficient of Output Voltage	$\Delta V_O / \Delta T$	$I_O = 5\text{ mA}$		0.2		$\text{mV}/^\circ\text{C}$

ELECTRICAL CHARACTERISTICS μ PC78N12

($V_{IN} = 19\text{ V}$, $I_O = 200\text{ mA}$, $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_O	$T_J = 25^\circ\text{C}$	11.5	12	12.5	V
		$14.5\text{ V} \leq V_{IN} \leq 27\text{ V}$, $5\text{ mA} \leq I_O \leq 200\text{ mA}$	11.4		12.6	
Line Regulation	REG_{IN}	$T_J = 25^\circ\text{C}$, $14.5\text{ V} \leq V_{IN} \leq 30\text{ V}$		30	100	mV
		$T_J = 25^\circ\text{C}$, $16\text{ V} \leq V_{IN} \leq 27\text{ V}$		20	50	
Load Regulation	REG_L	$T_J = 25^\circ\text{C}$, $1\text{ mA} \leq I_O \leq 300\text{ mA}$		18	240	mV
		$T_J = 25^\circ\text{C}$, $5\text{ mA} \leq I_O \leq 200\text{ mA}$		12	120	
Quiescent Current	I_{BIAS}	$T_J = 25^\circ\text{C}$		3.6	5.0	mA
Quiescent Current Change	ΔI_{BIAS}	$14.5\text{ V} \leq V_{IN} \leq 30\text{ V}$			0.8	mA
		$1\text{ mA} \leq I_O \leq 300\text{ mA}$			0.5	
Output Noise Voltage	V_n	$T_J = 25^\circ\text{C}$, $10\text{ Hz} \leq f \leq 100\text{ kHz}$		90	280	$\mu\text{V}_{r.m.s.}$
Ripple Rejection	$R \cdot R$	$T_J = 25^\circ\text{C}$, $f = 120\text{ Hz}$, $15\text{ V} \leq V_{IN} \leq 25\text{ V}$	55	64		dB
Dropout Voltage	V_{DIF}	$T_J = 25^\circ\text{C}$		1.7		V
Short Circuit Current	I_{Oshort}	$T_J = 25^\circ\text{C}$, $V_{IN} = 30\text{ V}$		100		mA
Peak Output Current	I_{Opeak}	$T_J = 25^\circ\text{C}$	360	480	640	mA
Temperature coefficient of Output Voltage	$\Delta V_O / \Delta T$	$I_O = 5\text{ mA}$		0.3		$\text{mV}/^\circ\text{C}$

ELECTRICAL CHARACTERISTICS μ PC78N15(V_{IN} = 23 V, I_O = 200 mA, 0 °C ≤ T_J ≤ +125 °C, C_{IN} = 0.33 μF, C_{OUT} = 0.1 μF)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V _O	T _J = 25 °C	14.4	15	15.6	V
		17.5 V ≤ V _{IN} ≤ 30 V, 5 mA ≤ I _O ≤ 200 mA	14.25		15.75	
Line Regulation	REG _{IN}	T _J = 25 °C, 17.5 V ≤ V _{IN} ≤ 30 V		32	100	mV
		T _J = 25 °C, 20 V ≤ V _{IN} ≤ 30 V		25	50	
Load Regulation	REG _L	T _J = 25 °C, 1 mA ≤ I _O ≤ 300 mA		25	300	mV
		T _J = 25 °C, 5 mA ≤ I _O ≤ 200 mA		16	150	
Quiescent Current	I _{BIAS}	T _J = 25 °C		3.7	5.0	mA
Quiescent Current Change	ΔI _{BIAS}	17.5 V ≤ V _{IN} ≤ 30 V			0.8	mA
		1 mA ≤ I _O ≤ 300 mA			0.5	
Output Noise Voltage	V _n	T _J = 25 °C, 10 Hz ≤ f ≤ 100 kHz		100	350	μV _{r.m.s.}
Ripple Rejection	R · R	T _J = 25 °C, f = 120 Hz, 18.5 V ≤ V _{IN} ≤ 28.5 V	54	62		dB
Dropout Voltage	V _{DF}	T _J = 25 °C		1.7		V
Short Circuit Current	I _{short}	T _J = 25 °C, V _{IN} = 30 V		100		mA
Peak Output Current	I _{Opeak}	T _J = 25 °C	360	470	640	mA
Temperature coefficient of Output Voltage	ΔV _O /ΔT	I _O = 5 mA		0.5		mV/°C

ELECTRICAL CHARACTERISTICS μ PC78N18(V_{IN} = 27 V, I_O = 200 mA, 0 °C ≤ T_J ≤ +125 °C, C_{IN} = 0.33 μF, C_{OUT} = 0.1 μF)







CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V _O	T _J = 25 °C	17.3	18	18.7	V
		21 V ≤ V _{IN} ≤ 33 V, 5 mA ≤ I _O ≤ 200 mA	17.1		18.9	
Line Regulation	REG _{IN}	T _J = 25 °C, 21 V ≤ V _{IN} ≤ 33 V		32	100	mV
		T _J = 25 °C, 22 V ≤ V _{IN} ≤ 33 V		25	50	
Load Regulation	REG _L	T _J = 25 °C, 1 mA ≤ I _O ≤ 300 mA		30	360	mV
		T _J = 25 °C, 5 mA ≤ I _O ≤ 200 mA		20	180	
Quiescent Current	I _{BIAS}	T _J = 25 °C		3.7	5.0	mA
Quiescent Current Change	ΔI _{BIAS}	21 V ≤ V _{IN} ≤ 33 V			0.8	mA
		1 mA ≤ I _O ≤ 300 mA			0.5	
Output Noise Voltage	V _n	T _J = 25 °C, 10 Hz ≤ f ≤ 100 kHz		115	420	μV _{r.m.s.}
Ripple Rejection	R · R	T _J = 25 °C, f = 120 Hz, 22 V ≤ V _{IN} ≤ 32 V	53	60		dB
Dropout Voltage	V _{DF}	T _J = 25 °C		1.7		V
Short Circuit Current	I _{short}	T _J = 25 °C, V _{IN} = 33 V		60		mA
Peak Output Current	I _{Opeak}	T _J = 25 °C	360	460	640	mA
Temperature coefficient of Output Voltage	ΔV _O /ΔT	I _O = 5 mA		0.5		mV/°C






ELECTRICAL CHARACTERISTICS μ PC78N24


($V_{IN} = 33\text{ V}$, $I_o = 200\text{ mA}$, $0\text{ }^{\circ}\text{C} \leq T_i \leq +125\text{ }^{\circ}\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_o	$T_i = 25\text{ }^{\circ}\text{C}$	23	24	25	V
		$27\text{ V} \leq V_{IN} \leq 38\text{ V}$, $5\text{ mA} \leq I_o \leq 200\text{ mA}$	22.8		25.2	
Line Regulation	REG_{IN}	$T_i = 25\text{ }^{\circ}\text{C}$, $27\text{ V} \leq V_{IN} \leq 38\text{ V}$		40	100	mV
		$T_i = 25\text{ }^{\circ}\text{C}$, $28\text{ V} \leq V_{IN} \leq 38\text{ V}$		30	50	
Load Regulation	REG_L	$T_i = 25\text{ }^{\circ}\text{C}$, $1\text{ mA} \leq I_o \leq 300\text{ mA}$		35	480	mV
		$T_i = 25\text{ }^{\circ}\text{C}$, $5\text{ mA} \leq I_o \leq 200\text{ mA}$		23	240	
Quiescent Current	I_{BIAS}	$T_i = 25\text{ }^{\circ}\text{C}$		3.7	5.0	mA
Quiescent Current Change	ΔI_{BIAS}	$27\text{ V} \leq V_{IN} \leq 38\text{ V}$			0.8	mA
		$1\text{ mA} \leq I_o \leq 300\text{ mA}$			0.5	
Output Noise Voltage	V_n	$T_i = 25\text{ }^{\circ}\text{C}$, $10\text{ Hz} \leq f \leq 100\text{ kHz}$		135	560	$\mu\text{V}_{r.m.s.}$
Ripple Rejection	$R \cdot R$	$T_i = 25\text{ }^{\circ}\text{C}$, $f = 120\text{ Hz}$, $28\text{ V} \leq V_{IN} \leq 38\text{ V}$	50	57		dB
Dropout Voltage	V_{OIF}	$T_i = 25\text{ }^{\circ}\text{C}$		1.7		V
Short Circuit Current	I_{Oshort}	$T_i = 25\text{ }^{\circ}\text{C}$, $V_{IN} = 38\text{ V}$		5		mA
Peak Output Current	I_{Opeak}	$T_i = 25\text{ }^{\circ}\text{C}$	360	460	640	mA
Temperature coefficient of Output Voltage	$\Delta V_o / \Delta T$	$I_o = 5\text{ mA}$		0.7		$\text{mV}/^{\circ}\text{C}$

TYPICAL CHARACTERISTICS (T_a = 25 °C)

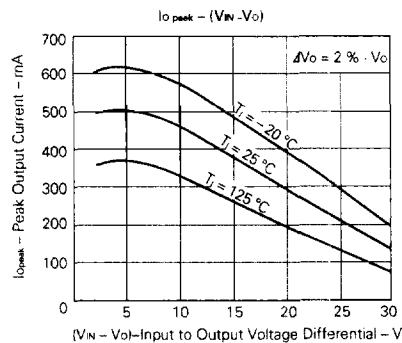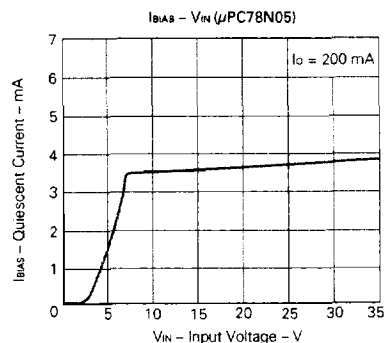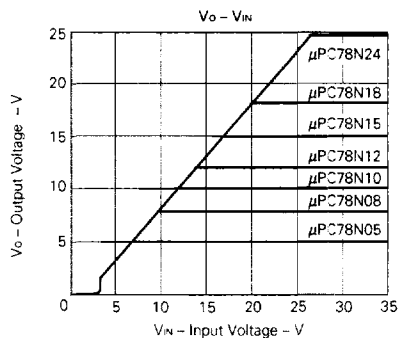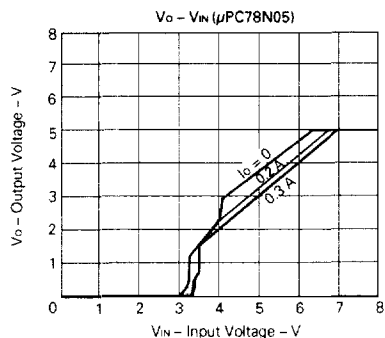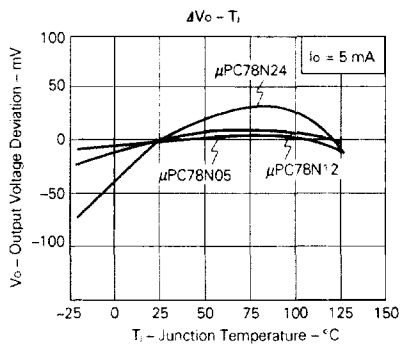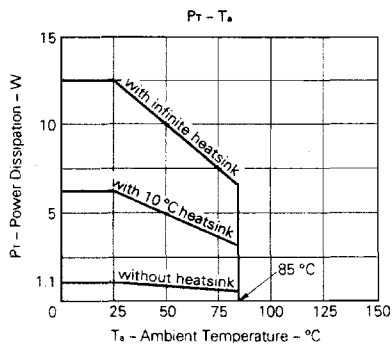

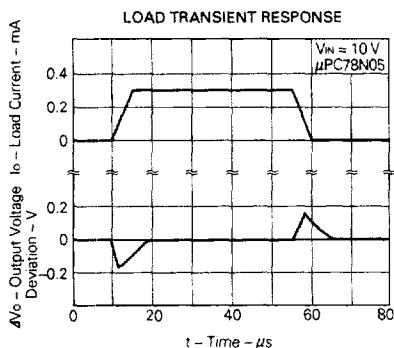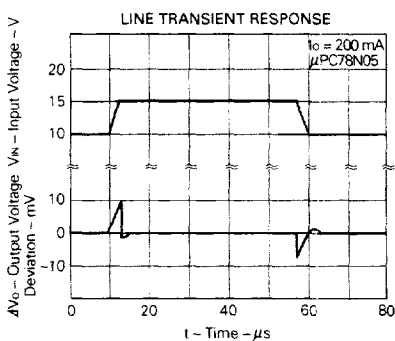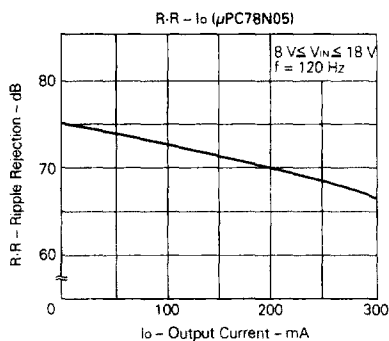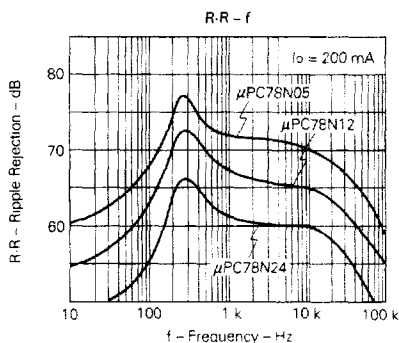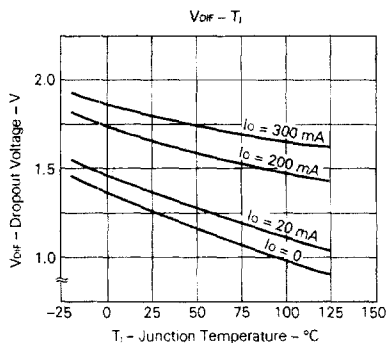

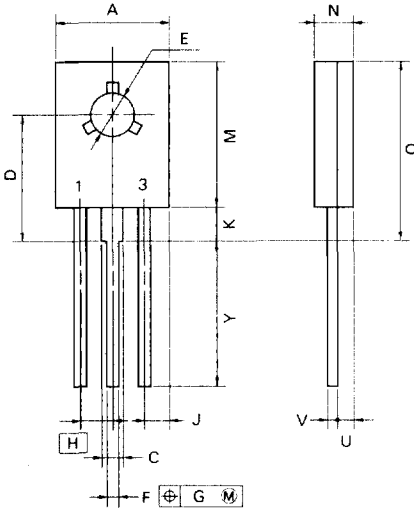PACKAGE DIMENSIONS (Unit: mm) **μ PC78N00H Series****3 PIN PLASTIC SIP (TO-126)**

P3HP 230B

NOTE

Each lead centerline is located within 0.23 mm (0.009 inch) of its true position (T.P.) at maximum material condition.

ITEM	MILLIMETERS	INCHES
A	8.5 MAX.	0.335 MAX.
C	1.1 MIN.	0.043 MIN.
D	9.7 ^{+0.3}	0.382 ^{+0.012}
E	3.2 ^{+0.1}	0.126 ^{+0.004}
F	0.80 ^{+0.1}	0.031 ^{+0.004}
G	0.23	0.009
H	2.3	0.091
J	1.95 MAX.	0.077 MAX.
K	2.3 MIN.	0.09 MIN.
M	11.5 MAX.	0.453 MAX.
N	2.7 ^{+0.2}	0.106 ^{+0.008}
Q	14.5 MAX.	0.571 MAX.
U	1.7 MAX.	0.067 MAX.
V	0.55 ^{+0.1}	0.022 ^{+0.004}
Y	13.5 ^{+0.7}	0.531 ^{+0.028}

RECOMMENDED SOLDERING CONDITIONS

The following conditions (see table below) must be met when soldering this product.

Please consult with our sales offices in case other soldering process is used, or in case soldering is done under different conditions.

<TYPES OF THROUGH HOLE MOUNT DEVICE>

[μPC78N00H Series]

Soldering process	Soldering condition	Symbol
Wave soldering	Solder temperature: 260 °C or below, Flow time: 10 seconds or below	