


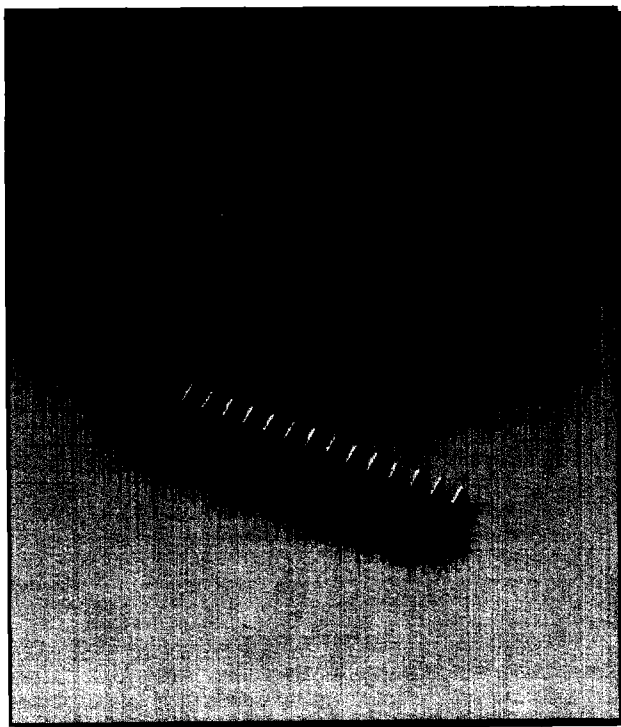


Features

◆2651 Connector:

- Available in 2 through 40 circuits
- Glass filled polyester UL94V-0
- With P.C.Board standoff
- Breakaway to desired circuits by fixture
- Accepts 0.64mm (.025") square pin
- Plating options are available
- Double contacts
- Mates with Leoco 2556,2557,2566 and 2567 header

◆2652 Connector:

- Available in 4 through 80 circuits
- Glass filled polyester UL94V-0
- With P.C.Board standoff
- Breakaway to desired circuits by fixture
- Accepts 0.64mm (.025") square pin
- Plating options are available
- Double contacts
- Mates with Leoco 2558,2559,2568,2569 and 2666 header

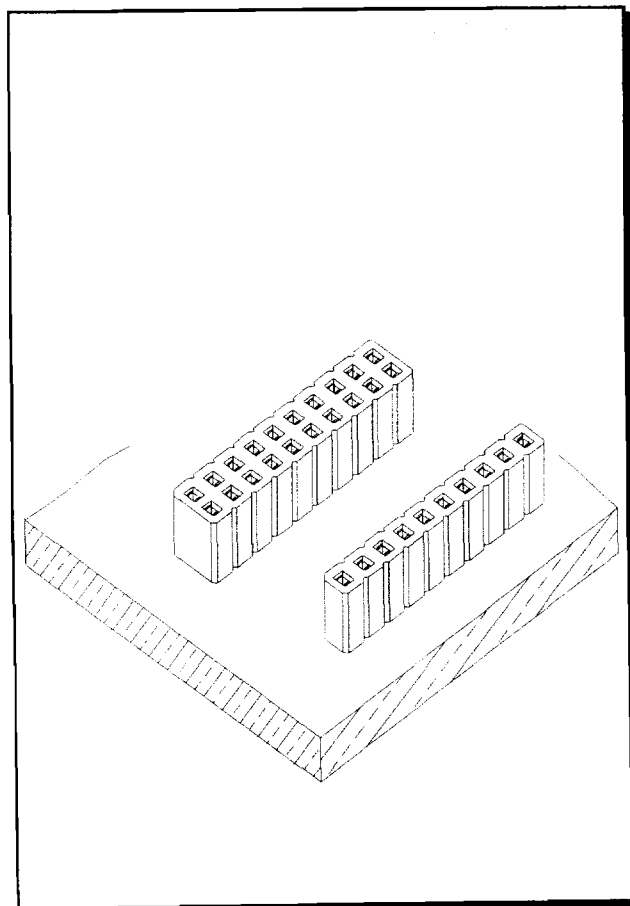




Specifications

- ◆Current rating: 1A DC,AC
- ◆Voltage rating: 250V DC,AC
- ◆Temperature rating: -25°C ~ +105°C
- ◆Contact resistance:
 - Initial:20mΩ max.
 - After environmental test:40mΩ max.
- ◆Insulation resistance:
 - Initial:1,000MΩ min.
 - After humidity and thermal shock test:500MΩ min.
- ◆Withstanding voltage: 1,000V AC /minute
- ◆Applicable PC board thickness: 1.6mm

2651 Series 2.54mm(.100") Single Row PCB Connector



Unit : $\frac{\text{mm}}{\text{inch}}$

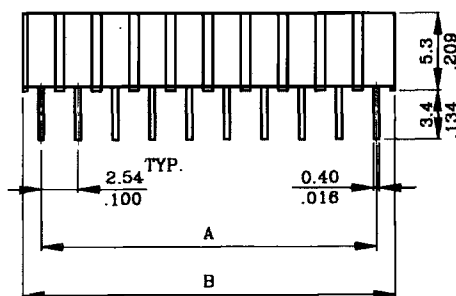


SECTION F-F

A = 2.54mm * No. of spaces
B = A + 2.54mm

Ordering Information:

2651S 40 U 000
1 2 3 4

1. Series No.
2. No. of circuits
3. Contact plating
T = Tin plated
U = Gold flash over 50 μ "nickel
W = 15 μ "gold over 50 μ "nickel
Z = 30 μ "gold over 50 μ "nickel
4. Special options






RECOMMENDED HOLE PATTERN

2652 Series 2.54mm(.100") Dual Row PCB Connector



Unit : $\frac{\text{mm}}{\text{inch}}$

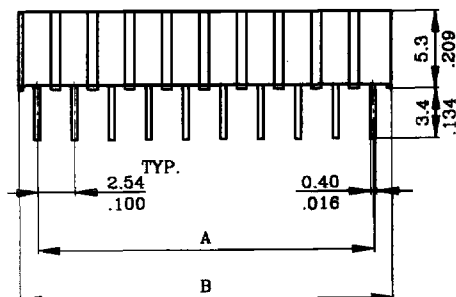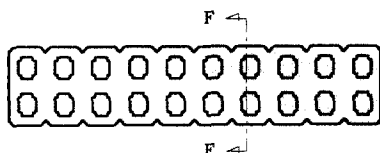


SECTION F-F

A = 2.54mm * No. of spaces
B = A + 2.54mm

Ordering Information:

2652S 80 U 000
1 2 3 4

1. Series No.
2. No. of circuits
3. Contact plating
T = Tin plated
U = Gold flash over 50 μ "nickel
W = 15 μ "gold over 50 μ "nickel
Z = 30 μ "gold over 50 μ "nickel
4. Special options



RECOMMENDED HOLE PATTERN