


DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.
3/13/00	-	ISSUED		NT	DG

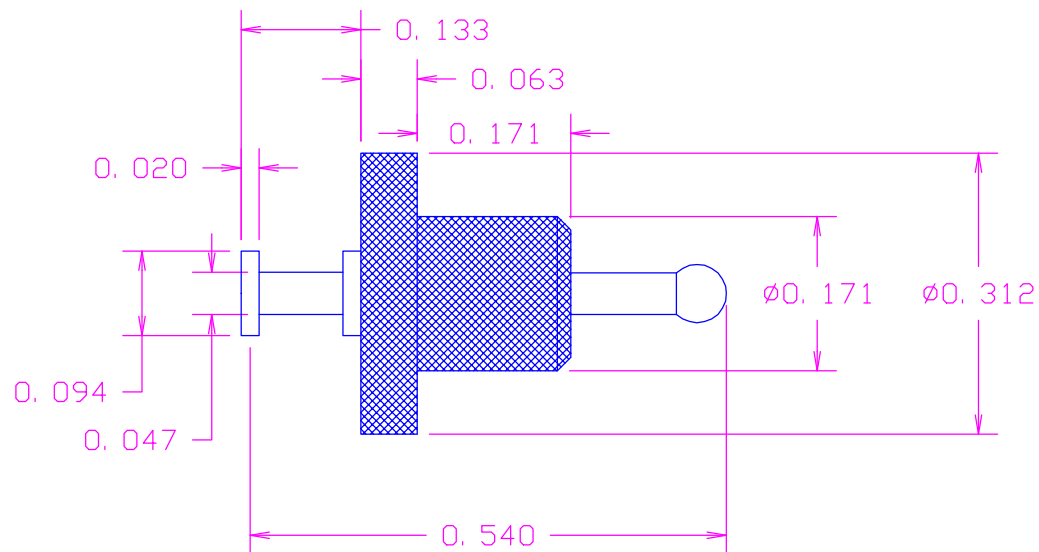

RECOMMENDED HOLE SIZE
FOR PRESS FIT INSERTION

MATERIAL: PIN- BRASS PER ASTM B16,




ALLOY C 36000, 1/2 HARD

BUSHING- TEFLON PER ASTM D1710

COLOR- WHITE

FINISH: .000010"MIN. GOLD PER MIL-G-4504,


TYPE II, GRADE C, OVER .0001"MIN. NICKEL

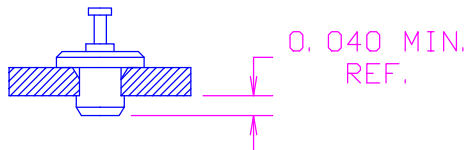

FOR BOARD THICKNESS GREATER THAN .040, X=60°

FOR BOARD THICKNESS LESS THAN .040, X=80°

ACTUAL SIZE



TOLERANCES (EXCEPT AS NOTED)	CONCORD		ELECTRONICS CORPORATION	
	DECIMAL ± .005	P/N	SCALE	30 GREAT JONES ST. NEW YORK N. Y. 10012
	FRACTIONAL ± 1/64	TITLE TERMINAL		
	ANGULAR ± 5°	DATE 3/13/00	DRAWING NUMBER 1116-03-0319	