


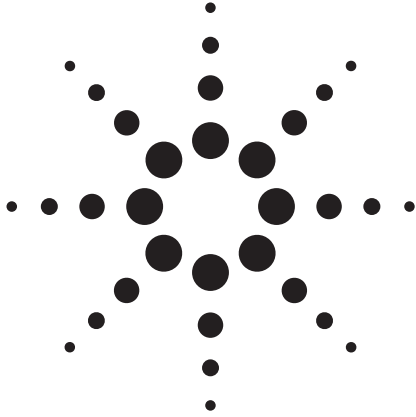

Agilent 8490G Coaxial Attenuators

Technical Overview

Key specifications

- Maximize your operating frequency range for DC to 67 GHz application
- Minimize your measurement uncertainty with low SWR of 1.45 up to 67 GHz
- Improve your measurement confidence with excellent attenuation accuracy

The Agilent 8490G family is a line of precision fixed coaxial attenuators with performance specified up to 67 GHz. These attenuators use the 1.85 mm coaxial connector, and exhibit excellent SWR and accuracy performance from DC to 67 GHz. The 8490G family has attenuation values of 3, 6, 10, 20, 30 and 40 dB.

The Agilent 8490G family of 1.85 mm fixed coaxial connectors are assembled and tested with the same meticulous care as their lower frequency counterparts: the Agilent 8490D, 8491 and 8493 families. These attenuators are tested on Agilent precision Network Analyzers to assure full specifications over their entire frequency range.



Agilent Technologies

Applications

Ruggedness, reliability and small size make these attenuators suitable for use on bench as well as on system level. With their accuracy and low SWR, they are ideally suited for extending the range of sensitive power meters for high power measurements. The same characteristics lend themselves to applications such as calibration standards and RF substitution measurements.

With their broad DC to 67 GHz frequency range and reasonable cost, general applications such as the reduction of power level to sensitive components and instrumentation systems are attractive and appropriate uses for these attenuators.

Specifications

Specifications describe the instrument's warranted performance over the temperature range 0° C to +55° C (except where noted). Supplemental and typical characteristics are intended to provide typical but non-warranted performance parameters. These are denoted as "typical", "nominal" or "approximate".

Frequency range	DC to 67 GHz
Impedance (nominal)	50 Ω
Connectors	1.85 mm
Power (maximum)	1 W average

Options	Attenuation (dB) = Insertion Loss				Atten. Data Uncert. (dB)
	Min (GHz) 0 to 67	Max (GHz) 0 to 26.5	Max (GHz) 26.5 to 50	Max (GHz) 50 to 67	(GHz) 0.4 to 67
8490G 003	2.5	3.9	4.4	4.8	±0.3
8490G 006	5.4	6.9	7.4	7.8	±0.3
8490G 010	9.4	10.9	11.1	11.3	±0.3
8490G 020	19.2	21.3	21.5	21.7	±0.3
8490G 030	29.2	31.3	31.5	31.7	±0.3
8490G 040	38.0	42.5	42.5	42.5	±0.6

Attenuation option	SWR (Maximum)			Return Loss (dB)		
	(GHz) 0 to 26.5	(GHz) 26.5 to 50	(GHz) 50 to 67	(GHz) 0 to 26.5	(GHz) 26.5 to 50	(GHz) 50 to 67
8490G-003	1.15	1.25	1.45	23.1	19.1	14.7
8490G-006	1.15	1.25	1.45	23.1	19.1	14.7
8490G-010	1.15	1.25	1.45	23.1	19.1	14.7
8490G-020	1.15	1.25	1.45	23.1	19.1	14.7
8490G-030	1.15	1.25	1.45	23.1	19.1	14.7
8490G-040	1.10	1.15	1.25	26.4	23.1	19.1

Environmental Specifications

The 8490G is designed to fully comply with Agilent Technologies' product operating environment specifications. The following summarizes the environmental specifications for these products.

Temperature

Operating	0° C to +55° C
Non-operating	–55° C to +85° C
Cycling	–65° C to +120° C, 10 cycles @ 20° C per minute, 20 minutes dwell time per MIL-STD-833F, Method 1010.8, Condition C (modified)

Humidity

Operating	50% to 95% RH @ 40° C, 24 hour cycling, 5 times.
-----------	--

Shock

Half-sine, smoothed	1000 G @ 0.5 ms, 3 shock pulses per orientation 18 total per MIL-STD-833F, Method 2002.4, Condition B (modified)
---------------------	---

Vibration


Broadband random	50 to 2000 Hz, 7.0 G rms, 15 minutes, per MIL-STD-833F, Method 2026-1 (modified)
------------------	--

Altitude

Operating	< 4,600 meters (15,000 feet)
Storage	< 15,300 meters (50,000 feet)

Mechanical Dimension

Net weight	7.2 g (0.0158 lb) 3, 6, 10, 20 dB 7.5 g (0.0165 lb) 30, 40 dB
-------------------	--

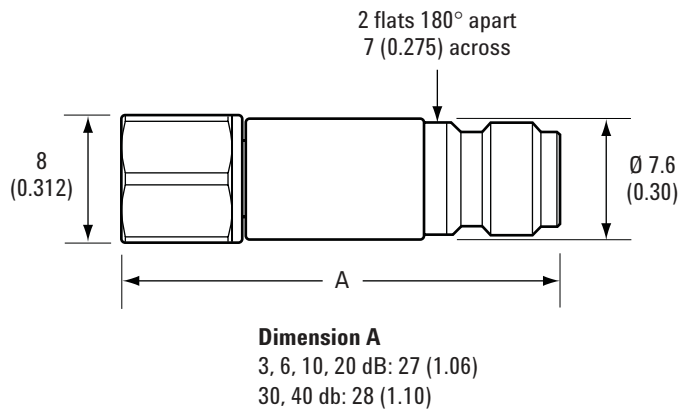

All dimensions are in millimeters (inches)

Figure 1. 8490G product outline

Supplement
Characteristics (typical)

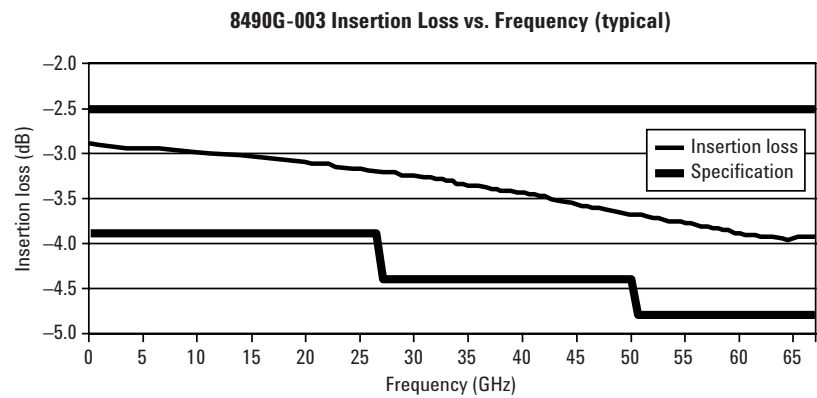


Figure 2. 8490G-003 typical insertion loss versus frequency

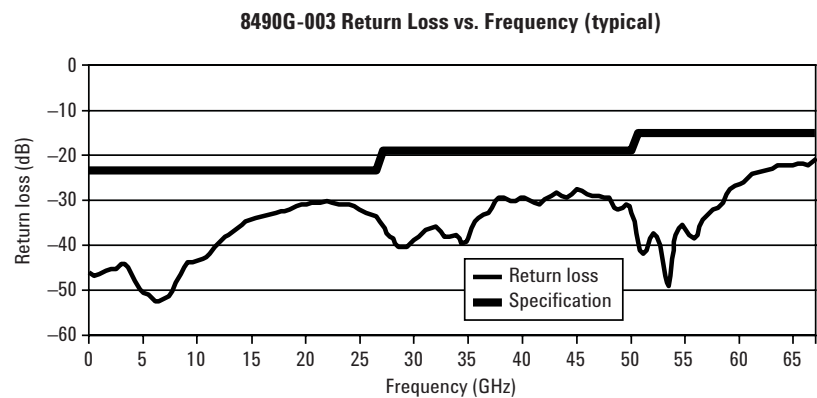


Figure 3. 8490G-003 typical return loss versus frequency

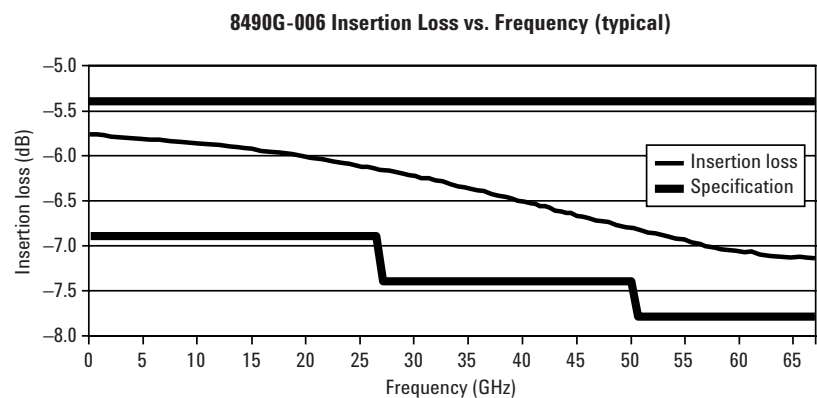


Figure 4. 8490G-006 typical insertion loss versus frequency

Supplement
Characteristics (typical)
—continued

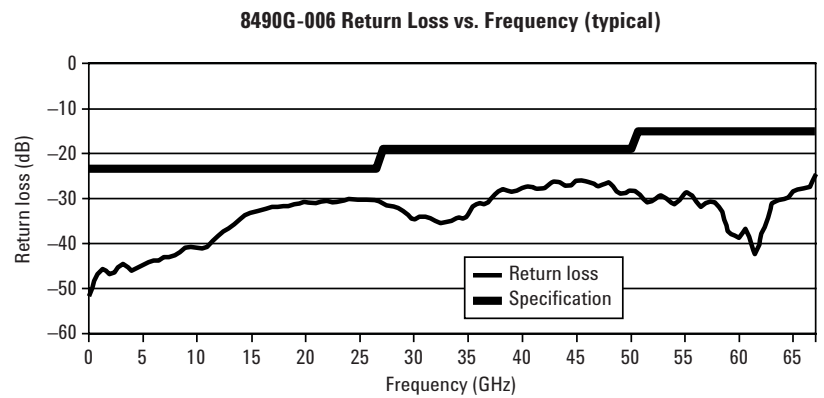


Figure 5. 8490G-006 typical return loss versus frequency

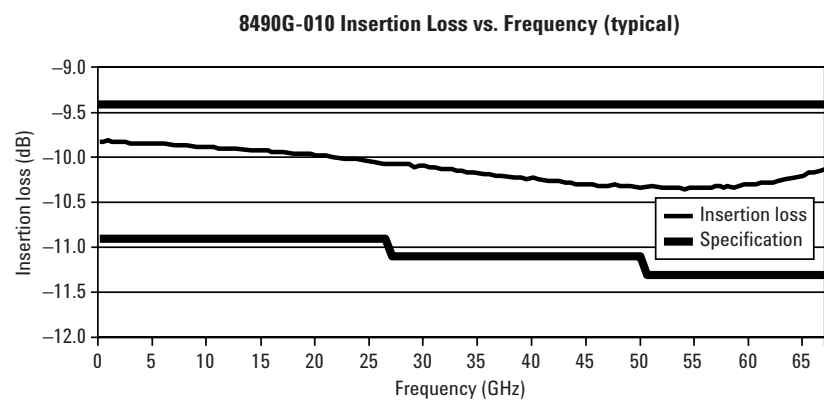


Figure 6. 8490G-010 typical insertion loss versus frequency

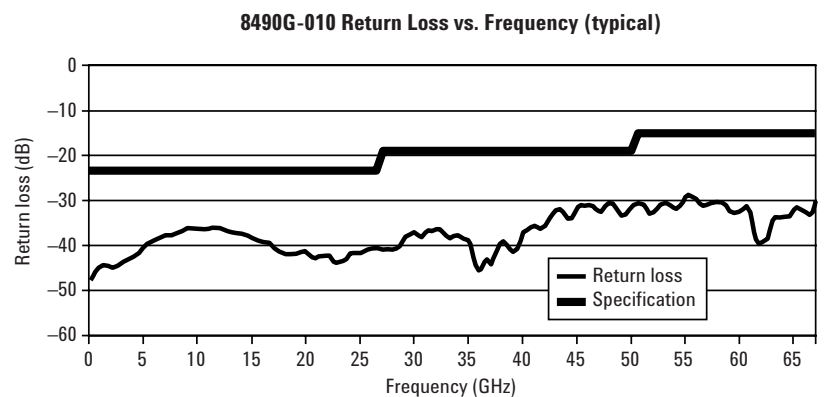


Figure 7. 8490G-010 typical return loss versus frequency

**Supplement
Characteristics (typical)
—continued**

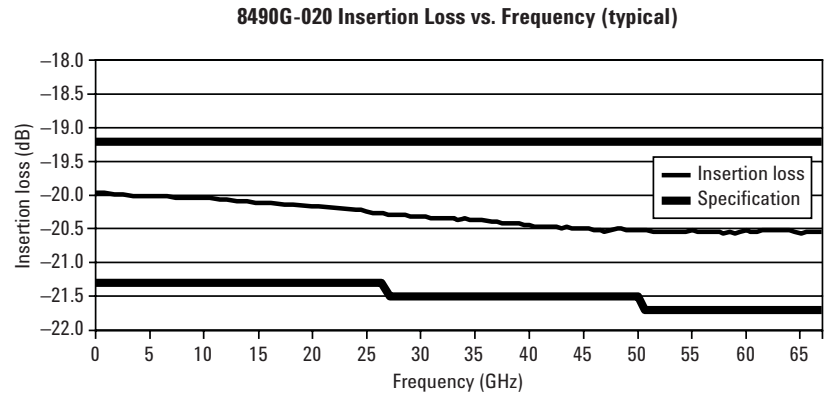


Figure 8. 8490G-020 typical insertion loss versus frequency

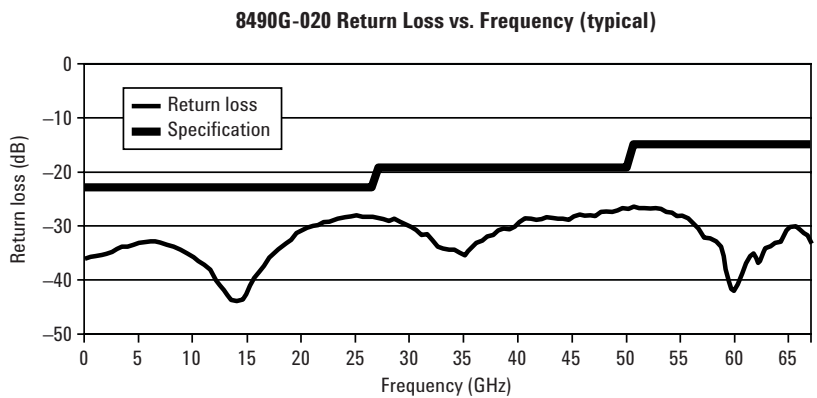


Figure 9. 8490G-020 typical return loss versus frequency

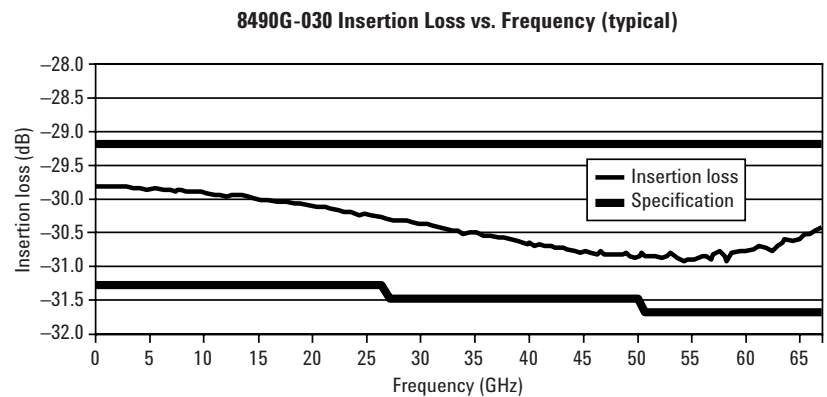


Figure 10. 8490G-030 typical insertion loss versus frequency

**Supplement
Characteristics (typical)
—continued**

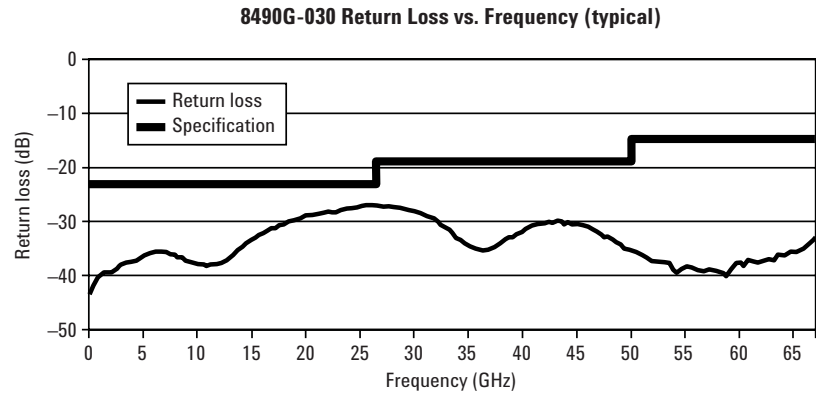


Figure 11. 8490G-030 typical return loss versus frequency

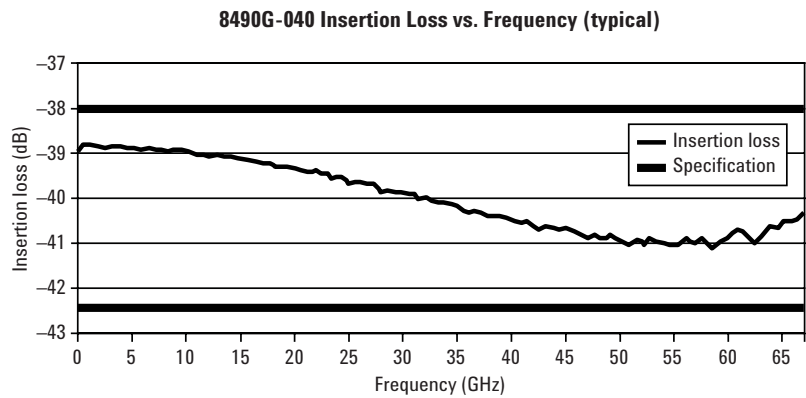


Figure 12. 8490G-040 typical insertion loss versus frequency

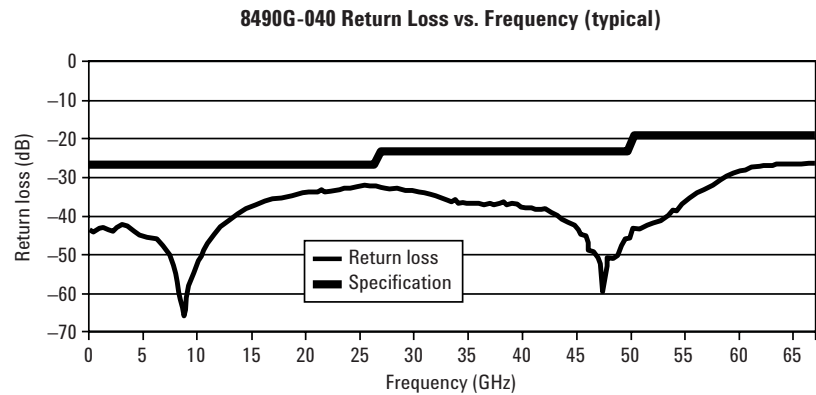


Figure 13. 8490G-040 typical return loss versus frequency

Ordering Information

Coaxial attenuator

8490G DC to 67 GHz, 1.85 mm coaxial connector

Attenuation option (must choose one)

8490G-003	3 dB attenuation
8490G-006	6 dB attenuation
8490G-010	10 dB attenuation
8490G-020	20 dB attenuation
8490G-030	30 dB attenuation
8490G-040	40 dB attenuation

Calibration Documentation (optional)

8490G-UK6 calibration data

Web Resource

<http://www.agilent.com/find/mta>



www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

www.agilent.com

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office.

Phone or Fax

United States:

(tel) 800 829 4444

(fax) 800 829 4433

Canada:

(tel) 877 894 4414

(fax) 800 746 4866

China:

(tel) 800 810 0189

(fax) 800 820 2816

Europe:

(tel) 31 20 547 2111

Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

Korea:

(tel) (080) 769 0800

(fax) (080) 769 0900

Latin America:

(tel) (305) 269 7500

Taiwan:

(tel) 0800 047 866

(fax) 0800 286 331

Other Asia Pacific

Countries:

(tel) (65) 6375 8100

(fax) (65) 6755 0042

Email: tm_ap@agilent.com

Contacts revised: 09/26/05

**The complete list is available at:
www.agilent.com/find/contactus**

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2005
Printed in USA, December 22, 2005
5989-4032EN



Agilent Technologies