





FCIconnect.com

Copyright FCI


### SINGLE ROW (1LO)

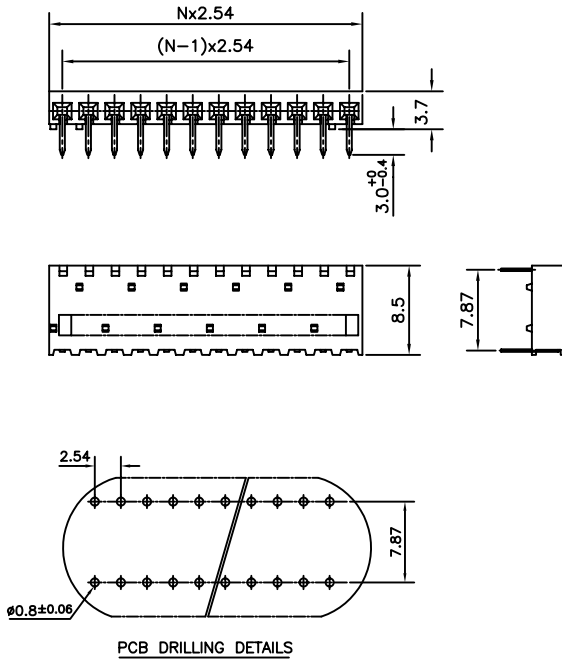

### DOUBLE ROW (2 LO)

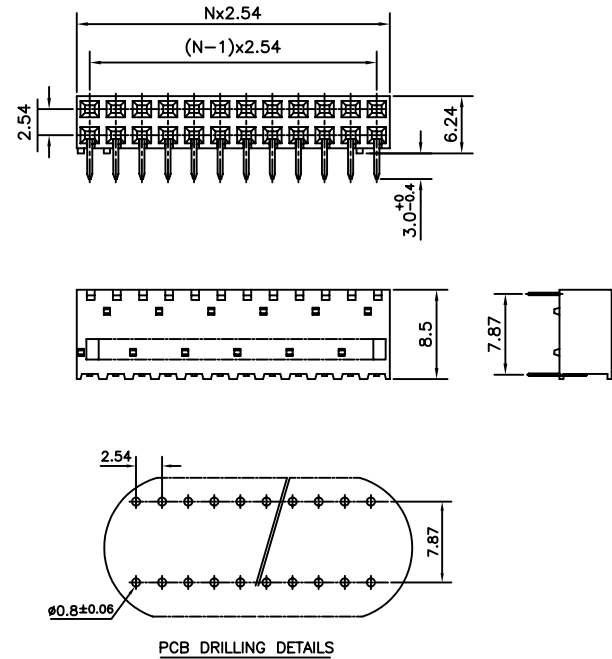

### ORDERING INFORMATION

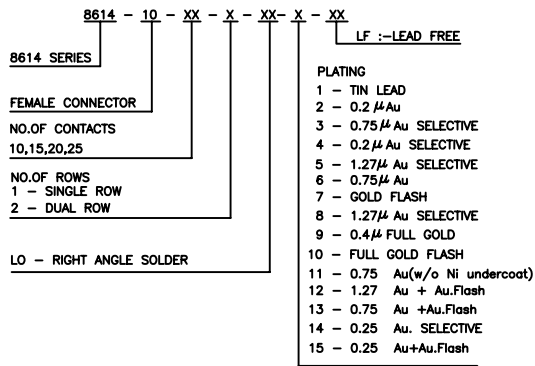

NOTES :  
1. THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

### TECHNICAL SPECIFICATION

INSULATOR MATERIAL : SELF EXTINGUISHING THERMOPLASTIC (UL94 V0)  
CONTACT MATERIAL : COPPER ALLOY  
MAXIMUM VOLTAGE : 1000 V rms.  
NOMINAL CURRENT : 3A AT 20°C  
INSULATION RESISTANCE : > 5000 MΩ  
CONTACT RESISTANCE : ≤ 20 mΩ  
CLIMATIC CATAGORY : -55°C TO +125°C / 21 DAYS EXPOSURE TO- INDUSTRIAL ENVIRONMENT HUMIDITY TEST AS HE-14.

mat'l. code REF TECH SPEC				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection MM	product family 8614
ltr	ecn no	dr	date	tolerances unless otherwise specified			title FEMALE CONNECTOR (RIGHT ANGLE SOLDER)
B	106-0125	MKV	2003-06-20	angles	linear	0±0.1	
C	106-0116	AB	2006-07-20	0°±1°		scale	
				dr	MINI K VANDANATH	1998-12-06	
				enr	JAI K A	1998-12-06	
				chr	ALEX BABU	2006-07-20	
				appd	BIJU K P	2006-07-20	
sheet index	revision sheet	B	C				dwg no C-8614-0080
		1	1				sheet 1 of 1 size A3
							type Product Customer Drawing