


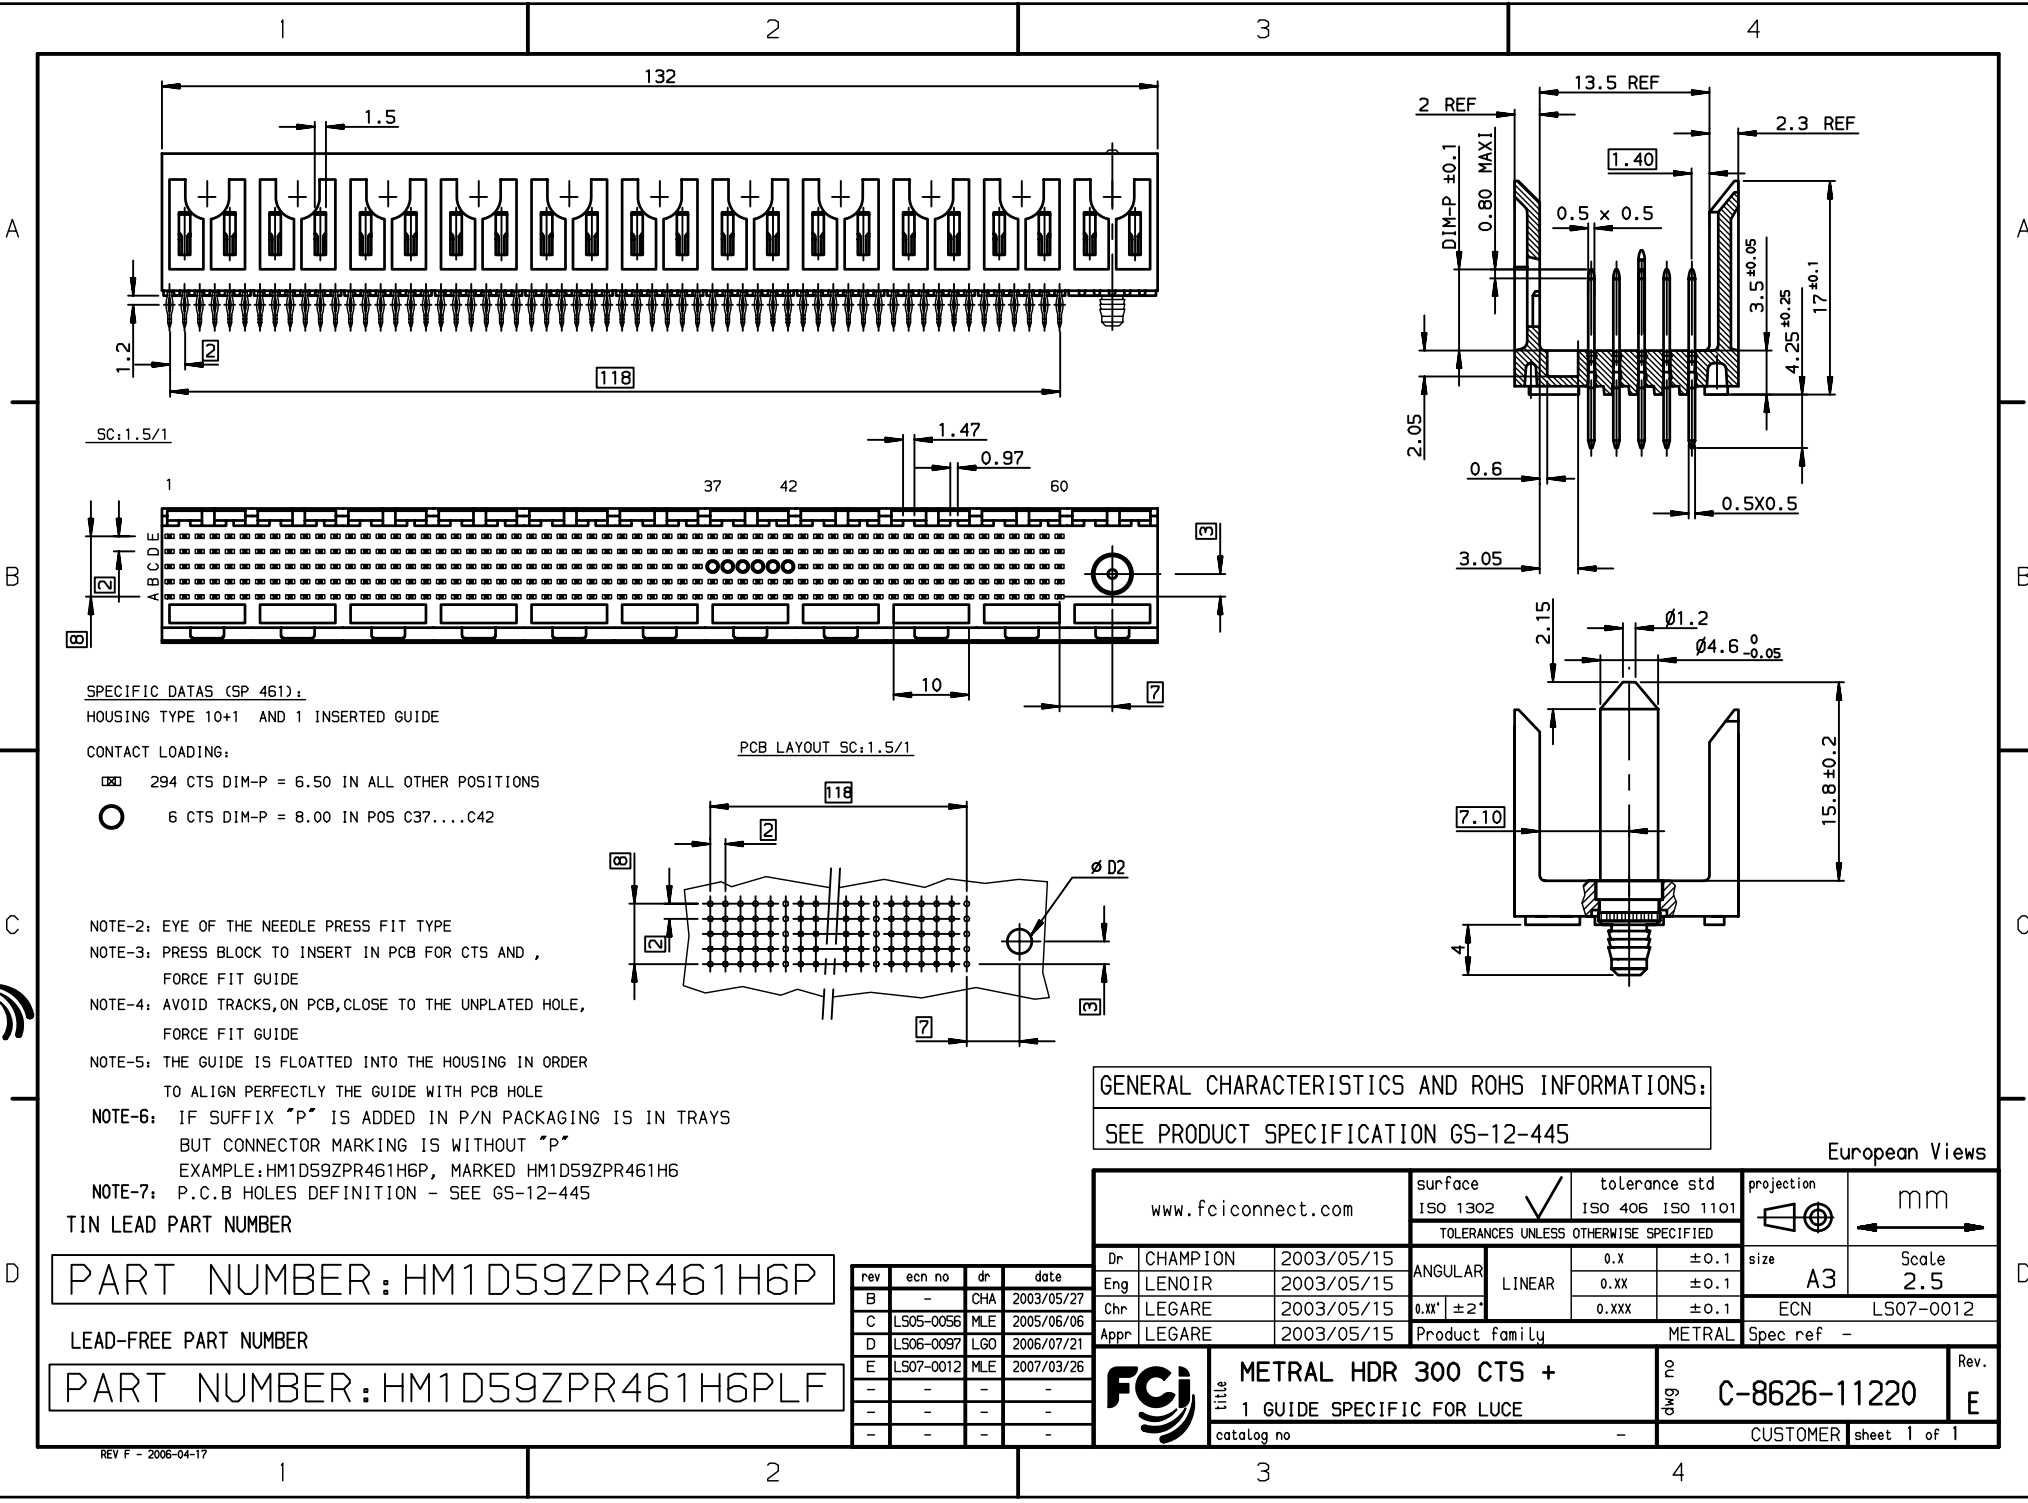


SPECIFIC DATAS (SP 461):

HOUSING TYPE 10+1 AND 1 INSERTED GUIDE

CONTACT LOADING:

- 294 CTS DIM-P = 6.50 IN ALL OTHER POSITIONS
- 6 CTS DIM-P = 8.00 IN POS C37....C42

PCB LAYOUT SC:1.5/1

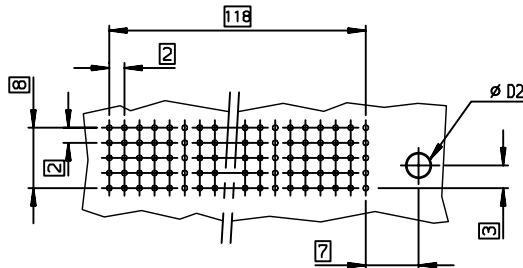

- NOTE-2: EYE OF THE NEEDLE PRESS FIT TYPE
- NOTE-3: PRESS BLOCK TO INSERT IN PCB FOR CTS AND , FORCE FIT GUIDE
- NOTE-4: AVOID TRACKS, ON PCB, CLOSE TO THE UNPLATED HOLE, FORCE FIT GUIDE
- NOTE-5: THE GUIDE IS FLOATTED INTO THE HOUSING IN ORDER TO ALIGN PERFECTLY THE GUIDE WITH PCB HOLE
- NOTE-6: IF SUFFIX "P" IS ADDED IN P/N PACKAGING IS IN TRAYS BUT CONNECTOR MARKING IS WITHOUT "P" EXAMPLE: HM1D59ZPR461H6P, MARKED HM1D59ZPR461H6
- NOTE-7: P.C.B HOLES DEFINITION - SEE GS-12-445

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE PRODUCT SPECIFICATION GS-12-445

www.fciconnect.com			surface ISO 1302 ✓		tolerance std ISO 406 ISO 1101		projection 		mm 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	CHAMPION	2003/05/15	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2.5		
Eng	LENOIR	2003/05/15			0.XX	±0.1				
Chr	LEGARE	2003/05/15			0.XX' ±2"	±0.1				
Appr	LEGARE	2003/05/15	Product family			METRAL		Spec ref -		ECN LS07-0012
			title METRAL HDR 300 CTS + 1 GUIDE SPECIFIC FOR LUCE			dwg no C-8626-11220			Rev. E	
			catalog no -			CUSTOMER			sheet 1 of 1	

rev	ecn no	dr	date
B	-	CHA	2003/05/27
C	LS05-0056	MLE	2005/06/06
D	LS06-0097	LGO	2006/07/21
E	LS07-0012	MLE	2007/03/26
-	-	-	-
-	-	-	-
-	-	-	-