

**SERIES: VQA | DESCRIPTION: DC-DC CONVERTER**


---

**FEATURES**

- designed for IGBT driver modules
- small footprint
- 3,000 Vac isolation
- short circuit protection
- temperature range (-40~105°C)
- efficiency up to 80%



**MODEL**

	input voltage		output voltage (Vdc)	output current max (mA)	ripple and noise <sup>1</sup> max (mVp-p)	efficiency <sup>2</sup> typ (%)
	typ (Vdc)	range (Vdc)				
VQA-S9-D15-SIP	12	9~15	15 -8	100 -80	200	80
VQA-S12-D15-SIP	12	11.6~12.4	15 -8.7	80 -40	200	80
VQA-S15-S9-SIP	15	14.5~15.5	9	111	200	80
VQA-S15-D9-SIP	15	14.5~15.5	9 -9	55 -55	200	80
VQA-S15-D15-SIP	15	14.5~15.5	15 -8.7	80 -40	200	80
VQA-S15-D17-SIP	15	14.5~15.5	17 -8.7	80 -40	200	80
VQA-S24-D15-SIP	24	23.3~24.7	15 -8.7	80 -40	200	80

Notes: 1. ripple and noise measured at 20 MHz bandwidth, full load  
2. at full load

**PART NUMBER KEY**


---

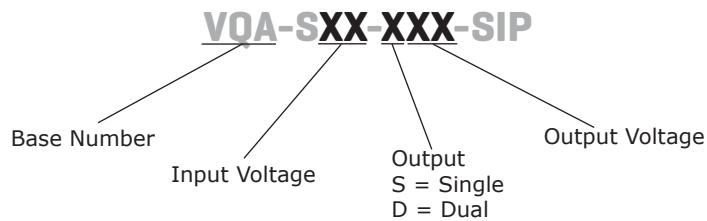

**INPUT**

parameter	conditions/description	min	typ	max	units
input voltage	VQA-S9-D15-SIP	9	12	15	Vdc
	VQA-S12-D15-SIP	11.6	12	12.4	Vdc
	VQA-S24-D15-SIP	23.3	24	24.7	Vdc
	all other models	14.5	15	15.5	Vdc
surge voltage	VQA-S9-D15-SIP	-0.7		15	Vdc
	VQA-S12-D15-SIP	-0.7		13	Vdc
	VQA-S24-D15-SIP	-0.7		26	Vdc
	all other models	-0.7		16	Vdc
temperature coefficient	at full load			±0.03	%/°C

**OUTPUT**

parameter	conditions/description	min	typ	max	units
line regulation	for Vin change of ±1%	1.2		1.5	%
switching frequency	at full load, nominal input	100		200	KHz

**PROTECTIONS**

parameter	conditions/description	min	typ	max	units
short circuit protection	continuous, auto restart				

**SAFETY AND COMPLIANCE**

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute at 1 mA max. leakage	3,000			Vac
isolation resistance	input to output at 500 Vdc	1,000			MΩ
isolation capacitance	input to output, 100 kHz/0.1 V	6.6			pF
conducted emissions	CISPR22/EN55022, class B, external circuit required (see figure 1)				
radiated emissions	CISPR22/EN55022, class B, external circuit required (see figure 1)				
ESD	IEC/EN61000-4-2, contact ±8kV, class B				
MTBF	MIL-HDBK-217F @ 25°C	3,500,000			hours
RoHS compliant	yes				

**ENVIRONMENTAL**

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-40		105	°C
storage temperature		-55		125	°C
storage humidity	non-condensing			95	%

**SOLDERABILITY**



parameter	conditions/description	min	typ	max	units
hand soldering	1.5mm from case for 10 seconds			300	°C

**MECHANICAL**


parameter	conditions/description	min	typ	max	units
dimensions	19.50 x 9.80 x 12.5 (0.768 x 0.386 x 0.492 inch)				mm
material	plastic (UL94V-0)				
weight		4.3			g
temperature rise	Ta=25°C	25			°C

## MECHANICAL DRAWING

units: mm [inches]

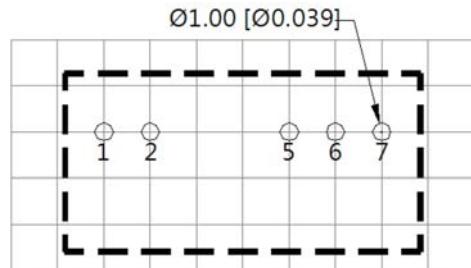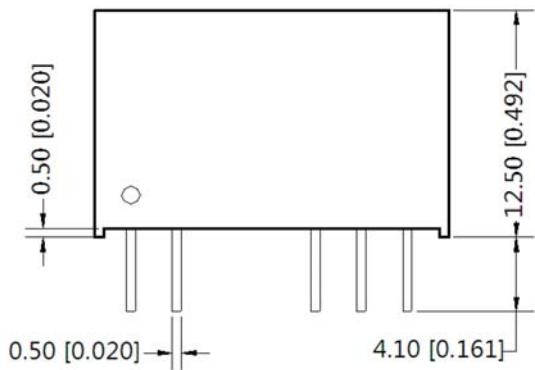tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]pin section tolerance:  $\pm 0.10$  [ $\pm 0.004$ ]


Grid size: 2.54mm x 2.54mm

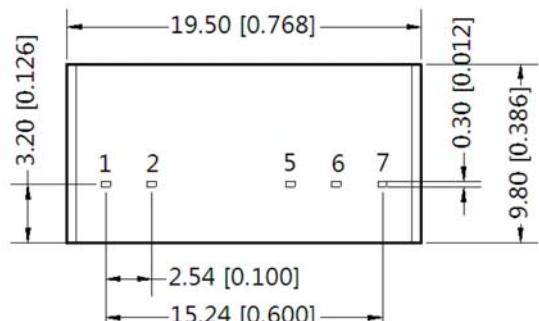Top View  
PCB LAYOUT

PIN CONNECTIONS	
PIN	FUNCTION
1	V <sub>in</sub>
2	GND
5*	-V <sub>o</sub>
6	0 V
7	+V <sub>o</sub>


Note: \*VQA-S15-S9-SIP has no connection

## DERATING CURVES

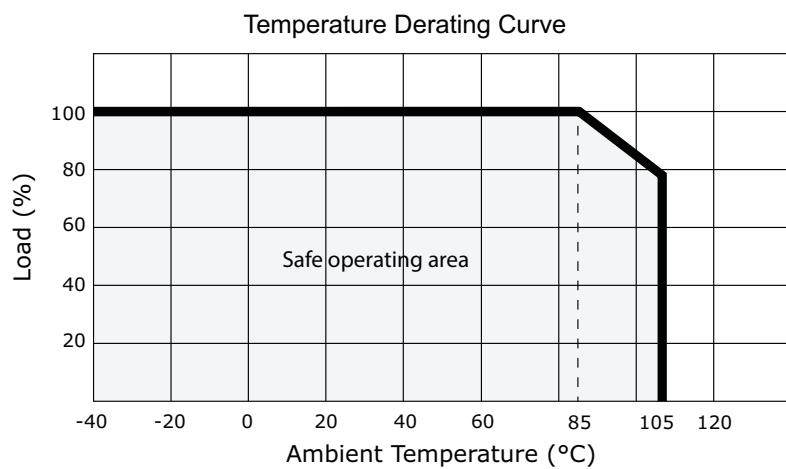


## PERFORMANCE CURVES

1. output current vs. efficiency

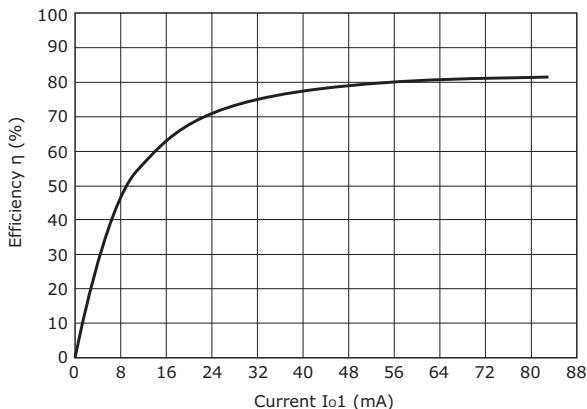


VQA-S12-D15-SIP, VQA-S15-D15-SIP, VQA-S24-D15-SIP


2. output current vs. output voltage

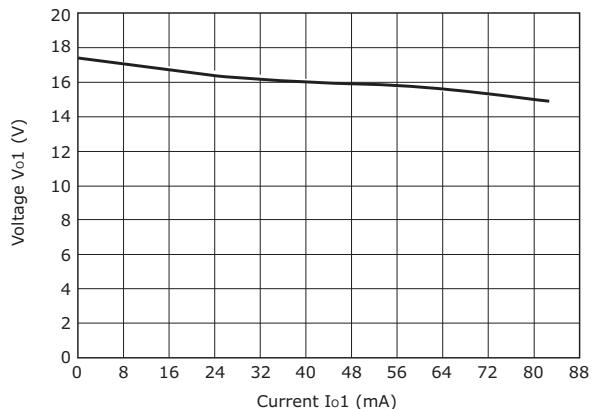


VQA-S12-D15-SIP, VQA-S15-D15-SIP, VQA-S24-D15-SIP

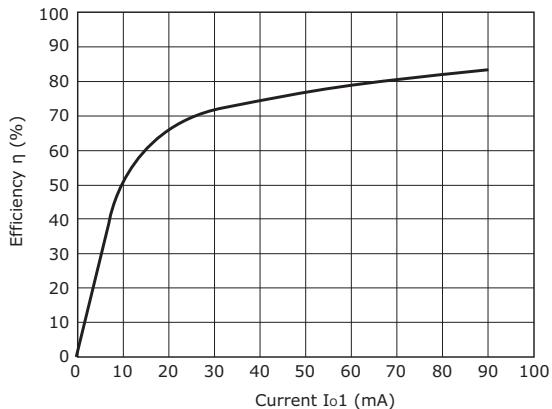


VQA-S15-D17-SIP

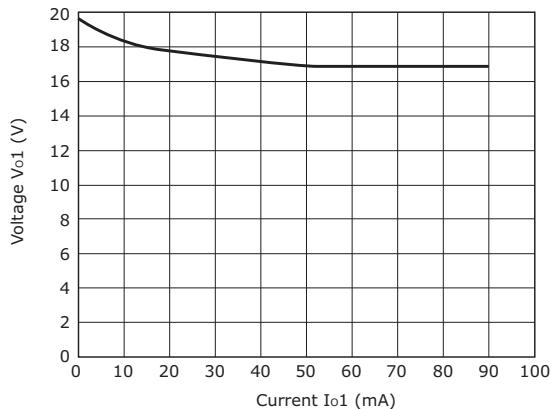

VQA-S15-D17-SIP

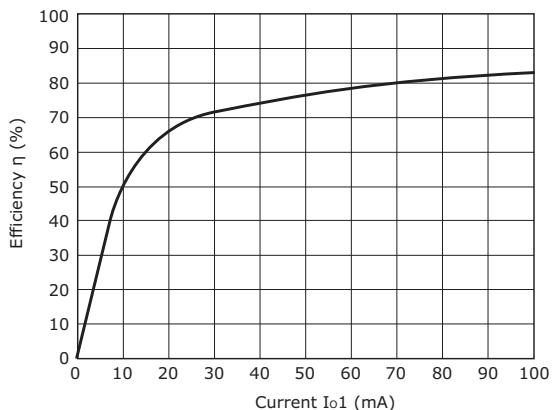


VQA-S9-D15-SIP

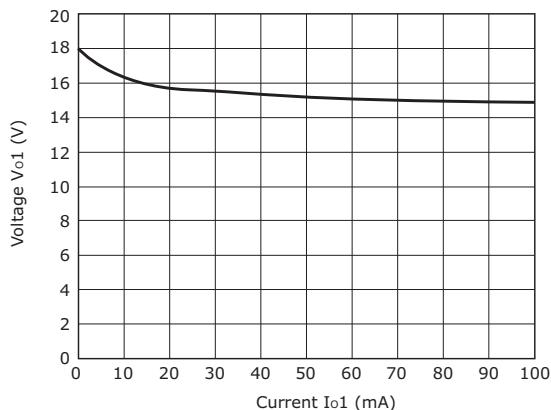

VQA-S9-D15-SIP


## PERFORMANCE CURVES (CONTINUED)

1. output current vs. efficiency

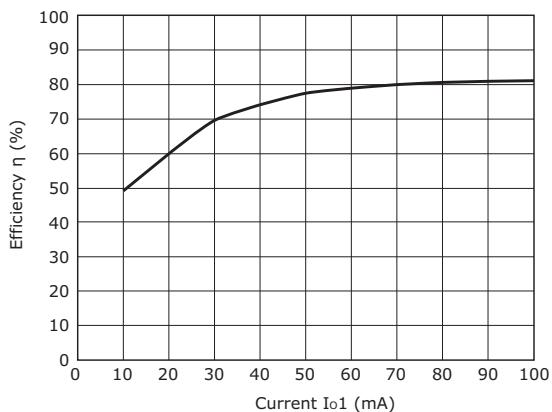


VQA-S15-S9-SIP


2. output current vs. output voltage

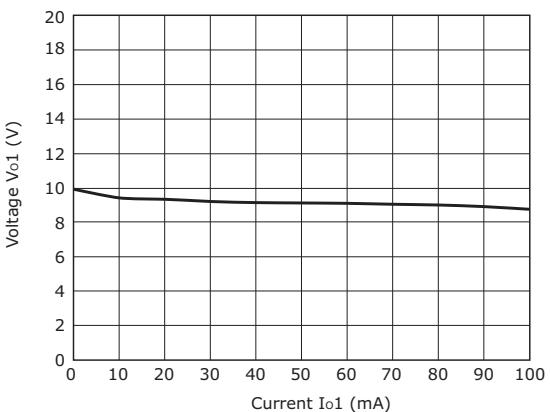

VQA-S15-S9-SIP

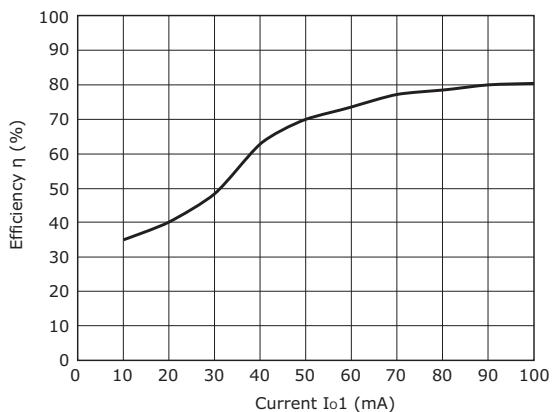

VQA-S15-D9-SIP

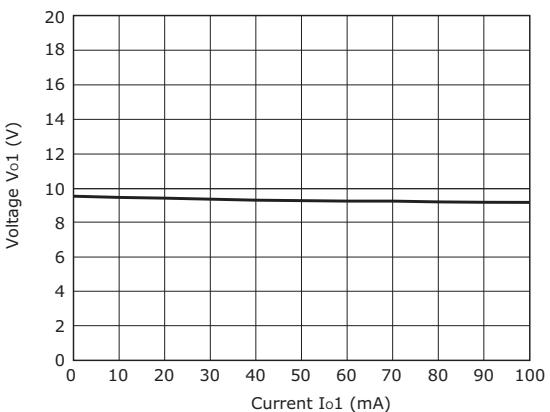

VQA-S15-D9-SIP

## EMC RECOMMENDED CIRCUIT

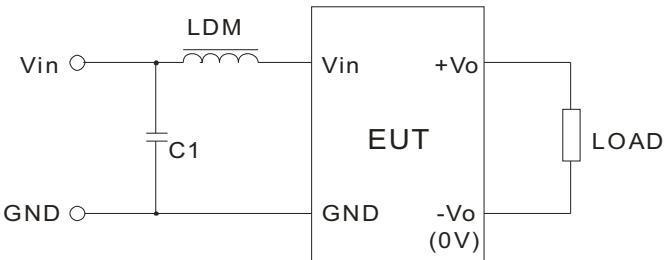


Table 1

Recommended external circuit components		
Vin (Vdc)	C1	LDM
12	4.7µF/50V	12µH
15	4.7µF/50V	12µH
24	4.7µF/50V	12µH

## TEST CONFIGURATION



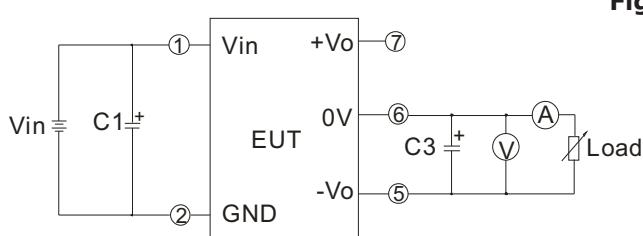


Figure 2

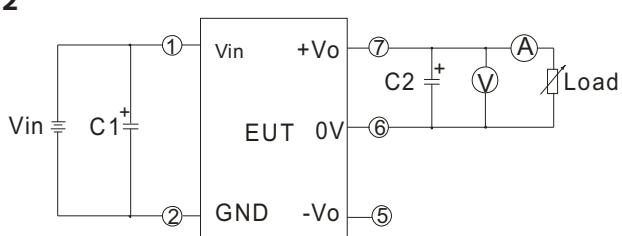

## APPLICATION CIRCUIT

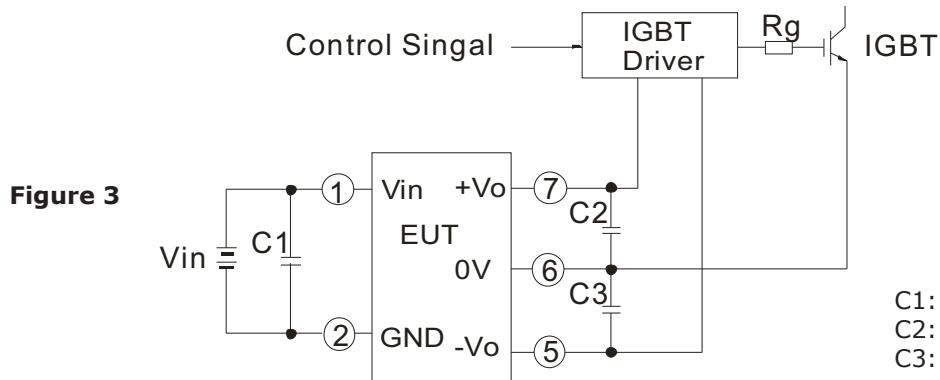

- Notes:
1. The wire between the converter and IGBT driver must as short as possible.
  2. External filter capacitors should be connected as close as possible to the converter and the IGBT driver.
  3. The output average power of the IGBT driver should be less than the output power of DC-DC module.
  4. Maximum capacitive load is tested at nominal input voltage and full load.

## REVISION HISTORY

rev.	description	date
1.0	initial release	08/16/2012
1.01	updated features	09/20/2012
1.02	updated product photograph	11/13/2012
1.03	various updates	02/05/2013
1.04	added switching frequency to spec	07/01/2013
1.05	added models, updated spec	09/23/2013

The revision history provided is for informational purposes only and is believed to be accurate.



**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
[cui.com](http://cui.com)  
[techsupport@cui.com](mailto:techsupport@cui.com)

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.