


## 63

# P.C. JACKS-CLOSED ENTRY-SWAGE MOUNT

## 09-9067-X-XX P.C. JACK FOR .060, .061 AND .062 PINS\*

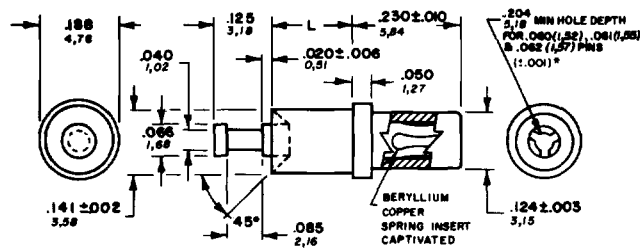


\* USE ONE PIN SIZE ONLY - NOT RECOMMENDED FOR SMALLER PIN USE AFTER LARGER PIN HAS BEEN USED.  
ACCEPTS .060 (1.27), .061 (1.27), AND .062 (1.27) PINS

| PART NO.  | L           | BOARD THICKNESS |
|-----------|-------------|-----------------|
| 09-9067-1 | .058 (1.47) | 1/32 (0.79)     |
| 09-9067-2 | .089 (2.26) | 1/16 (1.59)     |
| 09-9067-3 | .120 (3.05) | 3/32 (2.38)     |
| 09-9067-4 | .151 (3.84) | 1/8 (3.18)      |
| 09-9067-6 | .214 (5.44) | 3/16 (4.76)     |

| PART NO.     | COMPONENT FINISH | SPRING (BERYLLIUM COPPER) |
|--------------|------------------|---------------------------|
| 09-9067-X-03 | GOLD             | GOLD                      |
| 04           | ELECTRO-TIN      | ELECTRO-TIN               |
| 06           | ELECTRO-TIN      | GOLD                      |

RECOMMENDED MOUNTING HOLE  
.144 ± .002 DIA (#27 DRILL)

## 09-9019-X-XX DOUBLE ENDED P.C. JACK FOR .025 AND .040 PINS

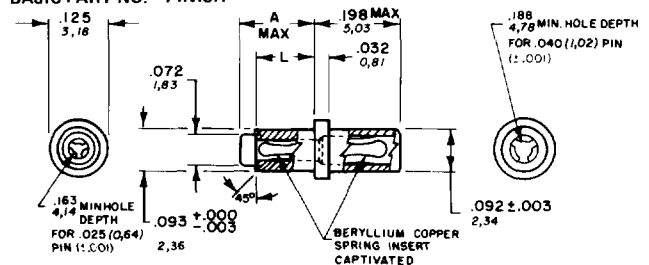


ACCEPTS .025 (0.64) AND .040 (1.02) PINS

| PART NO.  | L           | A           | BOARD THICKNESS |
|-----------|-------------|-------------|-----------------|
| 09-9019-2 | .094 (2.39) | .191 (4.85) | 1/16 (1.59)     |
| 09-9019-3 | .125 (3.18) | .191 (4.85) | 3/32 (2.38)     |
| 09-9019-4 | .156 (3.96) | .191 (4.85) | 1/8 (3.18)      |
| 09-9019-6 | .219 (5.56) | .253 (6.43) | 3/16 (4.76)     |

| PART NO.     | COMPONENT FINISH | SPRING (BERYLLIUM COPPER) |
|--------------|------------------|---------------------------|
| 09-9019-X-03 | GOLD             | GOLD                      |
| 04           | ELECTRO-TIN      | ELECTRO-TIN               |
| 06           | ELECTRO-TIN      | GOLD                      |

RECOMMENDED MOUNTING HOLE  
.094 ± .002 DIA (#42 DRILL)

## 09-9042-X-XX P.C. JACK FOR .080 PIN

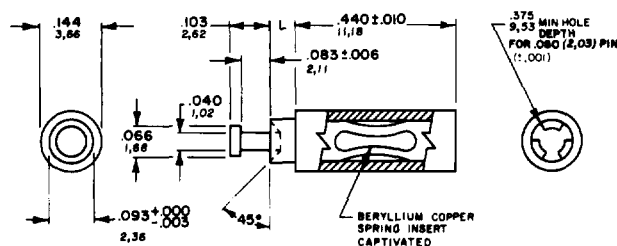


ACCEPTS .080 (2.03) PIN

| PART NO.  | L           | BOARD THICKNESS |
|-----------|-------------|-----------------|
| 09-9042-1 | .062 (1.57) | 1/32 (0.79)     |
| 09-9042-2 | .094 (2.39) | 1/16 (1.59)     |
| 09-9042-3 | .125 (3.18) | 3/32 (2.38)     |
| 09-9042-4 | .156 (3.96) | 1/8 (3.18)      |
| 09-9042-6 | .219 (5.56) | 3/16 (4.76)     |

| PART NO.     | COMPONENT FINISH | SPRING (BERYLLIUM COPPER) |
|--------------|------------------|---------------------------|
| 09-9042-X-03 | GOLD             | GOLD                      |
| 04           | ELECTRO-TIN      | ELECTRO-TIN               |
| 06           | ELECTRO-TIN      | GOLD                      |

RECOMMENDED MOUNTING HOLE  
.094 ± .002 DIA (#42 DRILL)

## 09-9022-X-XX DOUBLE ENDED P.C. JACK FOR .025 PIN, BOTH ENDS

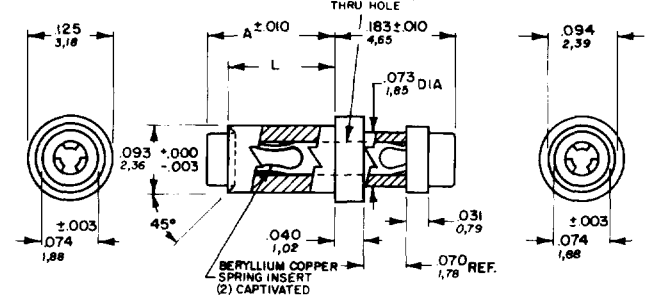


ACCEPTS .025 (0.64) PINS (BOTH ENDS) (1.001)

| PART NO.  | L           | A           | BOARD THICKNESS |
|-----------|-------------|-------------|-----------------|
| 09-9022-2 | .094 (2.39) | .129 (3.28) | 1/16 (1.59)     |
| 09-9022-3 | .125 (3.18) | .160 (4.06) | 3/32 (2.38)     |
| 09-9022-4 | .156 (3.96) | .191 (4.85) | 1/8 (3.18)      |
| 09-9022-6 | .219 (5.56) | .254 (6.45) | 3/16 (4.76)     |

| PART NO.     | COMPONENT FINISH | SPRING (BERYLLIUM COPPER) |
|--------------|------------------|---------------------------|
| 09-9022-X-03 | GOLD             | GOLD                      |
| 04           | ELECTRO-TIN      | ELECTRO-TIN               |
| 06           | ELECTRO-TIN      | GOLD                      |

RECOMMENDED MOUNTING HOLE  
.094 ± .002 DIA (#42 DRILL)

## 09-9003-X-XX P.C. JACK SLOTTED, FOR .040 PIN

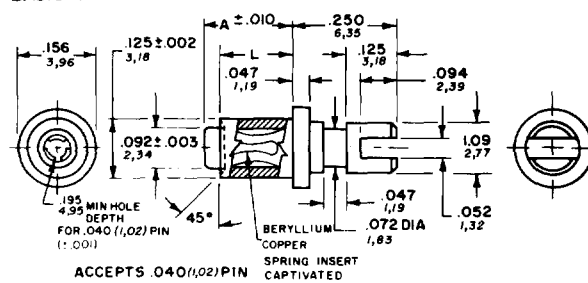


ACCEPTS .040 (1.02) PIN

| PART NO.  | L           | A           | BOARD THICKNESS |
|-----------|-------------|-------------|-----------------|
| 09-9003-2 | .094 (2.39) | .182 (4.62) | 1/16 (1.59)     |
| 09-9003-3 | .125 (3.18) | .182 (4.62) | 3/32 (2.38)     |
| 09-9003-4 | .156 (3.96) | .182 (4.62) | 1/8 (3.18)      |
| 09-9003-6 | .219 (5.56) | .223 (5.66) | 3/16 (4.76)     |

| PART NO.     | COMPONENT FINISH | SPRING (BERYLLIUM COPPER) |
|--------------|------------------|---------------------------|
| 09-9003-X-03 | GOLD             | GOLD                      |
| 04           | ELECTRO-TIN      | ELECTRO-TIN               |
| 06           | ELECTRO-TIN      | GOLD                      |

RECOMMENDED MOUNTING HOLE  
.129 ± .002 DIA (#30 DRILL)

## 09-9007-X-XX DOUBLE ENDED P.C. JACK FOR .040 PIN, BOTH ENDS

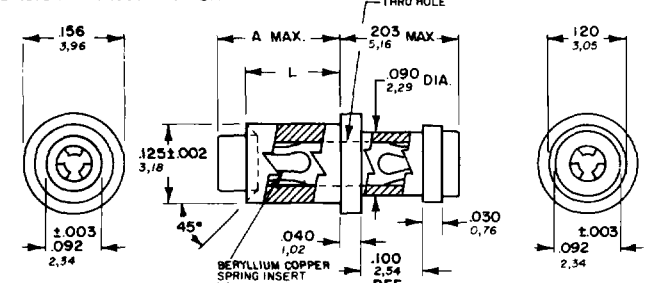

ACCEPTS .040 (1.02) PINS (BOTH ENDS) (1.001)

| PART NO.  | L           | A           | BOARD THICKNESS |
|-----------|-------------|-------------|-----------------|
| 09-9007-2 | .094 (2.39) | .203 (5.16) | 1/16 (1.59)     |
| 09-9007-3 | .125 (3.18) | .203 (5.16) | 3/32 (2.38)     |
| 09-9007-4 | .156 (3.96) | .203 (5.16) | 1/8 (3.18)      |
| 09-9007-6 | .219 (5.56) | .250 (6.35) | 3/16 (4.76)     |

| PART NO.     | COMPONENT FINISH | SPRING (BERYLLIUM COPPER) |
|--------------|------------------|---------------------------|
| 09-9007-X-03 | GOLD             | GOLD                      |
| 04           | ELECTRO-TIN      | ELECTRO-TIN               |
| 06           | ELECTRO-TIN      | GOLD                      |

RECOMMENDED MOUNTING HOLE .129 ± .002 DIA (#30 DRILL)

FOR ADDITIONAL SIZES AND MATERIALS, CONTACT FACTORY.

30 GREAT JONES STREET

NEW YORK, N.Y. 10012-1115

(212) 777-6571 • TWX 710-581-4930

FAX (212) 995-0161