



D4-20001 / 20002 1 to 100 MHz 20 dB Bi-Directional Couplers

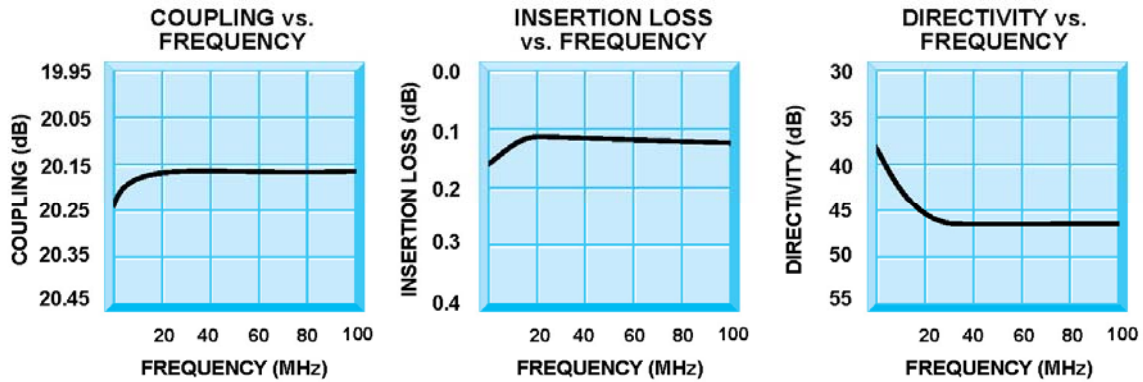

Guaranteed Specifications (-54° to +85°C)

Frequency Range	1 to 100 MHz
Coupling	20.25 ± 0.25 dB
Coupling Flatness	±0.2 dB Max.
Insertion Loss	0.3 dB Max.
Directivity	20 dB Min.
VSWR	1.15:1 Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

Mechanical Outline

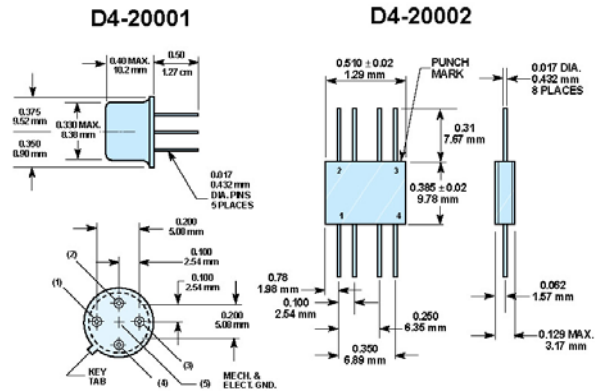

Functional Schematic

