

6

5

4

3

2

1

MATERIAL AND FINISH

Insulator: Thermoplastic, UL-94V-0 rated
Contacts: Phosphor bronze, gold flash plating





**RECOMMENDED
P. C. B. LAYOUT**

ELECTRICAL SPECIFICATIONS:

Current rating: 3 A
Contact resistance: 20 milliohm max.
Insulator resistance: 5000 Megaohm min.
Dielectric withstanding voltage: 1000 VAC

MECHANICAL SPECIFICATIONS:

Durability: 100 cycles
Retention force: 1.5 Kg min.
Temperature: -55°C TO 105°C

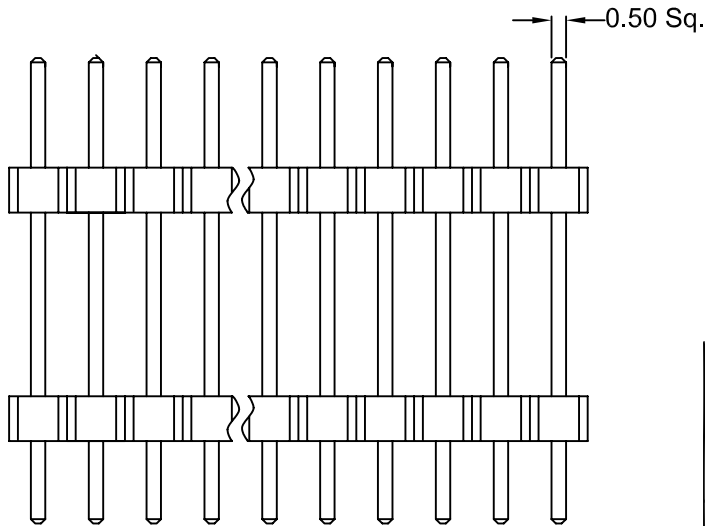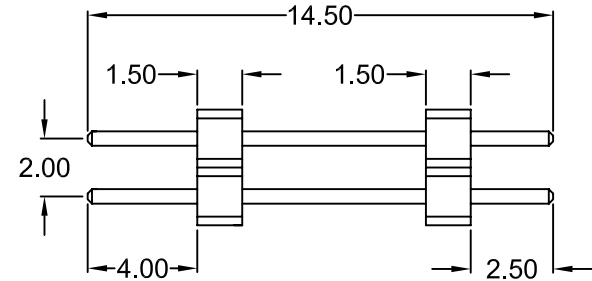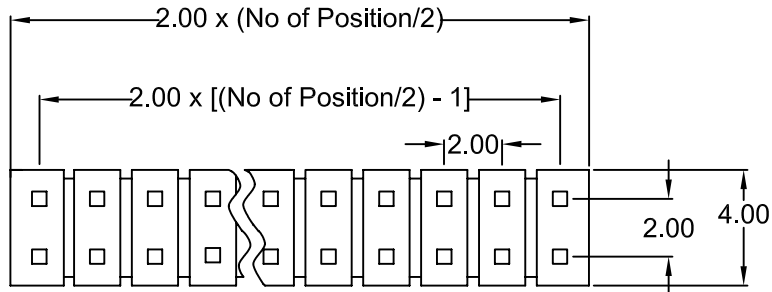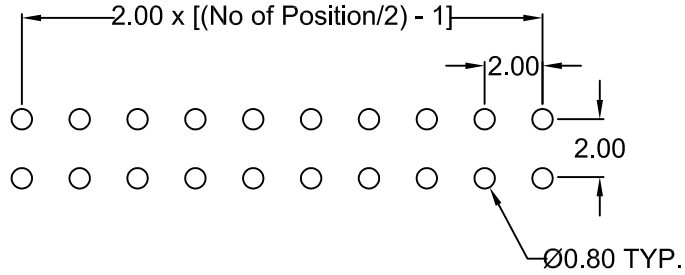

P/N	PLATING
TDMD-0XX-20	Gold Flash
TDMD-0XX-T-20	TIN
TDMD-0XX-1-20	5 µ" Gold
TDMD-0XX-2-20	10 µ" Gold
TDMD-0XX-3-20	15 µ" Gold
TDMD-0XX-4-20	30 µ" Gold

REVISIONS	CHNG	CHKD	APPR
	REV	DATE	CHANGE

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20
DRAWN BY	JA
DATE:	1/27/94
CHECK BY	
DATE:	
APPR BY	
DATE:	

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: HEADER; 2.00mm PITCH; 4-64 PINS
 DOUBLE ROW; STACKED

TDMD-0XX-X-20

PART #:	TDMD-0XX-X-20	SHEET	1 of 1
SIZE:	A	ALL DIMENSIONS FOR REFERENCE ONLY	REV: -
SCALE:	NTS	DIMENSIONS ARE IN MILLIMETERS	

6

5

4

3

2

1