

TOSHIBA Bipolar Linear Integrated Circuit Silicon Monolithic


**TA79005S, TA79006S, TA79007S, TA79008S, TA79009S, TA79010S,
TA79012S, TA79015S, TA79018S, TA79020S, TA79024S**

Output Current of 1A, Three-Terminal Negative Voltage Regulators

-5 V, -6 V, -7 V, -8 V, -9 V, -10 V, -12 V, -15 V, -18 V, -20 V, -24 V


Features

- Suitable for CMOS, TTL, and the power supply of other digital ICs
- Internal thermal overload protection
- Internal short circuit current limiting
- Maximum output current of 1.0 A
- Metal fin (tab) fully covered with mold resin (TO-220 NIS package)

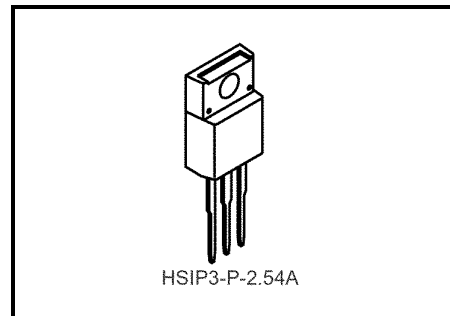


Weight: 1.7 g (typ.)


Pin Assignment



Marking

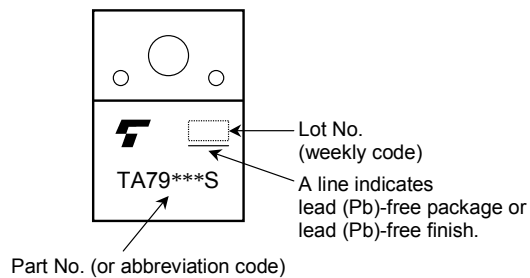

Equivalent Circuit

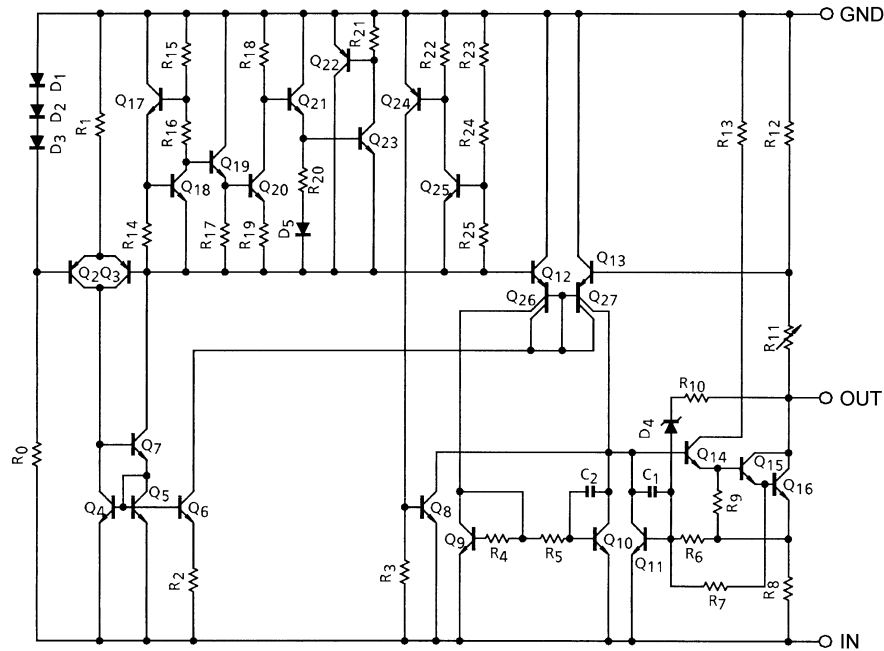

Maximum Ratings (Ta = 25°C)

Characteristics		Symbol	Rating	Unit
Input voltage	TA79005S	V _{IN}	-35	V
	TA79006S			
	TA79007S			
	TA79008S			
	TA79009S			
	TA79010S			
	TA79012S			
	TA79015S			
	TA79018S			
	TA79020S		-40	
	TA79024S			
Power dissipation	(Ta = 25°C)	P _D	2	W
	(Tc = 25°C)		20	
Operating temperature		T _{opr}	-30~85	°C
Storage temperature		T _{stg}	-55~150	°C
Junction temperature		T _j	150	°C
Thermal resistance		R _{th (j-c)}	6.25	°C/W
		R _{th (j-a)}	62.5	

TA79005S
Electrical Characteristics

 (Unless otherwise specified, $V_{IN} = -10\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

Characteristics		Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit	
Output voltage		V _{OUT}	1	T _j = 25°C	-5.2	-5.0	-4.8	V	
Line regulation		Reg-line	1	T _j = 25°C	-12 V ≤ V _{IN} ≤ -8 V	—	7	50	mV
					-25 V ≤ V _{IN} ≤ -7 V	—	35	100	
Load regulation		Reg-load	1	T _j = 25°C	5 mA ≤ I _{OUT} ≤ 1.5 A	—	11	100	mV
					250 mA ≤ I _{OUT} ≤ 750 mA	—	4	50	
Output voltage		V _{OUT}	1	T _j = 25°C	-20 V ≤ V _{IN} ≤ -7 V, 5 mA ≤ I _{OUT} ≤ 1.0 A	-5.25	—	-4.75	V
Quiescent current		I _B	1	T _j = 25°C	—	4.3	8.0	mA	
Quiescent current change	Line	ΔI _B	1	T _j = 25°C	-25 V ≤ V _{IN} ≤ -7 V	—	—	1.3	mA
	Load		1		5 mA ≤ I _{OUT} ≤ 1.0 A	—	—	0.5	
Output noise voltage		V _{NO}	2	T _a = 25°C, I _{OUT} = 20 mA, 10 Hz ≤ f ≤ 100 kHz		—	40	—	μV _{rms}
Ripple rejection		R.R.	3	f = 120 Hz, I _{OUT} = 20 mA, T _j = 25°C		63	70	—	dB
Short circuit current limit		I _{SC}	1	T _j = 25°C		—	1.9	—	A
Dropout voltage		V _D	1	T _j = 25°C, I _{OUT} = 1.0 A		—	2.0	—	V
Average temperature coefficient of output voltage		T _{CVO}	1	I _{OUT} = 5.0 mA		—	0.6	—	mV/°C

TA79006S
Electrical Characteristics

 (Unless otherwise specified, $V_{IN} = -11\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

Characteristics		Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit	
Output voltage		V _{OUT}	1	T _j = 25°C	-6.25	-6.0	-5.75	V	
Line regulation		Reg-line	1	T _j = 25°C	-13 V ≤ V _{IN} ≤ -9 V	—	9	60	mV
					-25 V ≤ V _{IN} ≤ -8 V	—	43	120	
Load regulation		Reg-load	1	T _j = 25°C	5 mA ≤ I _{OUT} ≤ 1.5 A	—	13	120	mV
					250 mA ≤ I _{OUT} ≤ 750 mA	—	5	60	
Output voltage		V _{OUT}	1	T _j = 25°C	-21 V ≤ V _{IN} ≤ -8 V, 5 mA ≤ I _{OUT} ≤ 1.0 A	-6.3	—	-5.7	V
Quiescent current		I _B	1	T _j = 25°C	—	4.3	8.0	mA	
Quiescent current change	Line	ΔI _B	1	T _j = 25°C	-25 V ≤ V _{IN} ≤ -8 V	—	—	1.3	mA
	Load		1		5 mA ≤ I _{OUT} ≤ 1.0 A	—	—	0.5	
Output noise voltage		V _{NO}	2	T _a = 25°C, I _{OUT} = 20 mA, 10 Hz ≤ f ≤ 100 kHz		—	45	—	μV _{rms}
Ripple rejection		R.R.	3	f = 120 Hz, I _{OUT} = 20 mA, T _j = 25°C		61	68	—	dB
Short circuit current limit		I _{SC}	1	T _j = 25°C		—	1.9	—	A
Dropout voltage		V _D	1	T _j = 25°C, I _{OUT} = 1.0 A		—	2.0	—	V
Average temperature coefficient of output voltage		T _{CVO}	1	I _{OUT} = 5.0 mA		—	0.7	—	mV/°C

TA79007S
Electrical Characteristics

 (Unless otherwise specified, $V_{IN} = -12\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

Characteristics		Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit	
Output voltage		V _{OUT}	1	T _j = 25°C	-7.28	-7.0	-6.72	V	
Line regulation		Reg-line	1	T _j = 25°C	-15 V ≤ V _{IN} ≤ -10 V	—	10	70	mV
					-25 V ≤ V _{IN} ≤ -9 V	—	45	140	
Load regulation		Reg-load	1	T _j = 25°C	5 mA ≤ I _{OUT} ≤ 1.5 A	—	20	140	mV
					250 mA ≤ I _{OUT} ≤ 750 mA	—	7	70	
Output voltage		V _{OUT}	1	T _j = 25°C	-22 V ≤ V _{IN} ≤ -9 V, 5 mA ≤ I _{OUT} ≤ 1.0 A	-7.35	—	-6.65	V
Quiescent current		I _B	1	T _j = 25°C	—	4.3	8.0	mA	
Quiescent current change	Line	ΔI _B	1	T _j = 25°C	-25 V ≤ V _{IN} ≤ -9 V	—	—	1.0	mA
	Load		1		5 mA ≤ I _{OUT} ≤ 1.0 A	—	—	0.5	
Output noise voltage		V _{NO}	2	T _a = 25°C, I _{OUT} = 20 mA, 10 Hz ≤ f ≤ 100 kHz		—	49	—	μV _{rms}
Ripple rejection		R.R.	3	f = 120 Hz, I _{OUT} = 20 mA, T _j = 25°C		60	67	—	dB
Short circuit current limit		I _{SC}	1	T _j = 25°C		—	1.9	—	A
Dropout voltage		V _D	1	T _j = 25°C, I _{OUT} = 1.0 A		—	2.0	—	V
Average temperature coefficient of output voltage		T _{CVO}	1	I _{OUT} = 5.0 mA		—	0.9	—	mV/°C

TA79008S
Electrical Characteristics

 (Unless otherwise specified, $V_{IN} = -14\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

Characteristics		Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit	
Output voltage		V _{OUT}	1	T _j = 25°C	-8.3	-8.0	-7.7	V	
Line regulation		Reg-line	1	T _j = 25°C	-17 V ≤ V _{IN} ≤ -11 V	—	11	80	mV
					-25 V ≤ V _{IN} ≤ -10.5 V	—	47	160	
Load regulation		Reg-load	1	T _j = 25°C	5 mA ≤ I _{OUT} ≤ 1.5 A	—	26	160	mV
					250 mA ≤ I _{OUT} ≤ 750 mA	—	9	80	
Output voltage		V _{OUT}	1	T _j = 25°C	-23 V ≤ V _{IN} ≤ -10.5 V, 5 mA ≤ I _{OUT} ≤ 1.0 A	-8.4	—	-7.6	V
Quiescent current		I _B	1	T _j = 25°C	—	4.3	8.0	mA	
Quiescent current change	Line	ΔI _B	1	T _j = 25°C	-25 V ≤ V _{IN} ≤ -10.5 V	—	—	1.0	mA
	Load		1		5 mA ≤ I _{OUT} ≤ 1.0 A	—	—	0.5	
Output noise voltage		V _{NO}	2	T _a = 25°C, I _{OUT} = 20 mA, 10 Hz ≤ f ≤ 100 kHz	—	52	—	μV _{rms}	
Ripple rejection		R.R.	3	f = 120 Hz, I _{OUT} = 20 mA, T _j = 25°C	59	66	—	dB	
Short circuit current limit		I _{SC}	1	T _j = 25°C	—	1.9	—	A	
Dropout voltage		V _D	1	T _j = 25°C, I _{OUT} = 1.0 A	—	2.0	—	V	
Average temperature coefficient of output voltage		T _{CVO}	1	I _{OUT} = 5.0 mA	—	1.0	—	mV/°C	

TA79009S
Electrical Characteristics

 (Unless otherwise specified, $V_{IN} = -15\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

Characteristics		Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit	
Output voltage		V _{OUT}	1	T _j = 25°C	-9.3	-9.0	-8.7	V	
Line regulation		Reg-line	1	T _j = 25°C	-19 V ≤ V _{IN} ≤ -13 V	—	11	82	mV
					-26 V ≤ V _{IN} ≤ -11.5 V	—	48	162	
Load regulation		Reg-load	1	T _j = 25°C	5 mA ≤ I _{OUT} ≤ 1.5 A	—	33	162	mV
					250 mA ≤ I _{OUT} ≤ 750 mA	—	11	82	
Output voltage		V _{OUT}	1	T _j = 25°C	-24 V ≤ V _{IN} ≤ -11.5 V, 5 mA ≤ I _{OUT} ≤ 1.0 A	-9.4	—	-8.6	V
Quiescent current		I _B	1	T _j = 25°C	—	4.3	8.0	mA	
Quiescent current change	Line	ΔI _B	1	T _j = 25°C	-26.5 V ≤ V _{IN} ≤ -13 V	—	—	1.0	mA
	Load		1		5 mA ≤ I _{OUT} ≤ 1.0 A	—	—	0.5	
Output noise voltage		V _{NO}	2	T _a = 25°C, I _{OUT} = 20 mA, 10 Hz ≤ f ≤ 100 kHz	—	60	—	μV _{rms}	
Ripple rejection		R.R.	3	f = 120 Hz, I _{OUT} = 20 mA, T _j = 25°C	57	64	—	dB	
Short circuit current limit		I _{SC}	1	T _j = 25°C	—	1.9	—	A	
Dropout voltage		V _D	1	T _j = 25°C, I _{OUT} = 1.0 A	—	2.0	—	V	
Average temperature coefficient of output voltage		T _{CVO}	1	I _{OUT} = 5.0 mA	—	1.1	—	mV/°C	

TA79010S
Electrical Characteristics

 (Unless otherwise specified, $V_{IN} = -16\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

Characteristics		Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit	
Output voltage		V _{OUT}	1	T _j = 25°C	-10.4	-10.0	-9.6	V	
Line regulation		Reg-line	1	T _j = 25°C	-20 V ≤ V _{IN} ≤ -14 V	—	12	90	mV
					-27 V ≤ V _{IN} ≤ -12.5 V	—	50	180	
Load regulation		Reg-load	1	T _j = 25°C	5 mA ≤ I _{OUT} ≤ 1.5 A	—	40	180	mV
					250 mA ≤ I _{OUT} ≤ 750 mA	—	13	90	
Output voltage		V _{OUT}	1	T _j = 25°C	-25 V ≤ V _{IN} ≤ -12.5 V, 5 mA ≤ I _{OUT} ≤ 1.0 A	-10.5	—	-9.5	V
Quiescent current		I _B	1	T _j = 25°C	—	4.4	8.0	mA	
Quiescent current change	Line	ΔI _B	1	T _j = 25°C	-27.5 V ≤ V _{IN} ≤ -14 V	—	—	1.0	mA
	Load		1		5 mA ≤ I _{OUT} ≤ 1.0 A	—	—	0.5	
Output noise voltage		V _{NO}	2	T _a = 25°C, I _{OUT} = 20 mA, 10 Hz ≤ f ≤ 100 kHz	—	65	—	μV _{rms}	
Ripple rejection		R.R.	3	f = 120 Hz, I _{OUT} = 20 mA, T _j = 25°C	57	63	—	dB	
Short circuit current limit		I _{SC}	1	T _j = 25°C	—	1.9	—	A	
Dropout voltage		V _D	1	T _j = 25°C, I _{OUT} = 1.0 A	—	2.0	—	V	
Average temperature coefficient of output voltage		T _{CVO}	1	I _{OUT} = 5.0 mA	—	1.3	—	mV/°C	

TA79012S
Electrical Characteristics

 (Unless otherwise specified, $V_{IN} = -19\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

Characteristics		Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit	
Output voltage		V _{OUT}	1	T _j = 25°C	-12.5	-12.0	-11.5	V	
Line regulation		Reg-line	1	T _j = 25°C	-22 V ≤ V _{IN} ≤ -16 V	—	13	120	mV
					-30 V ≤ V _{IN} ≤ -14.5 V	—	55	240	
Load regulation		Reg-load	1	T _j = 25°C	5 mA ≤ I _{OUT} ≤ 1.5 A	—	46	240	mV
					250 mA ≤ I _{OUT} ≤ 750 mA	—	17	120	
Output voltage		V _{OUT}	1	T _j = 25°C	-27 V ≤ V _{IN} ≤ -14.5 V, 5 mA ≤ I _{OUT} ≤ 1.0 A	-12.6	—	-11.4	V
Quiescent current		I _B	1	T _j = 25°C	—	4.4	8.0	mA	
Quiescent current change	Line	ΔI _B	1	T _j = 25°C	-30 V ≤ V _{IN} ≤ -14.5 V	—	—	1.0	mA
	Load		1		5 mA ≤ I _{OUT} ≤ 1.0 A	—	—	0.5	
Output noise voltage		V _{NO}	2	T _a = 25°C, I _{OUT} = 20 mA, 10 Hz ≤ f ≤ 100 kHz	—	75	—	μV _{rms}	
Ripple rejection		R.R.	3	f = 120 Hz, I _{OUT} = 20 mA, T _j = 25°C	54	61	—	dB	
Short circuit current limit		I _{SC}	1	T _j = 25°C	—	1.9	—	A	
Dropout voltage		V _D	1	T _j = 25°C, I _{OUT} = 1.0 A	—	2.0	—	V	
Average temperature coefficient of output voltage		T _{CVO}	1	I _{OUT} = 5.0 mA	—	1.6	—	mV/°C	

TA79015S
Electrical Characteristics

 (Unless otherwise specified, $V_{IN} = -23\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

Characteristics		Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit	
Output voltage		V _{OUT}	1	T _j = 25°C	-15.6	-15.0	-14.4	V	
Line regulation		Reg:line	1	T _j = 25°C	-26 V ≤ V _{IN} ≤ -20 V	—	14	150	mV
					-30 V ≤ V _{IN} ≤ -17.5 V	—	57	300	
Load regulation		Reg:load	1	T _j = 25°C	5 mA ≤ I _{OUT} ≤ 1.5 A	—	68	300	mV
					250 mA ≤ I _{OUT} ≤ 750 mA	—	25	150	
Output voltage		V _{OUT}	1	T _j = 25°C	-30 V ≤ V _{IN} ≤ -17.5 V, 5 mA ≤ I _{OUT} ≤ 1.0 A	-15.75	—	-14.25	V
Quiescent current		I _B	1	T _j = 25°C	—	4.4	8.0	mA	
Quiescent current change	Line	ΔI _B	1	T _j = 25°C	-30 V ≤ V _{IN} ≤ -17.5 V	—	—	1.0	mA
	Load		1		5 mA ≤ I _{OUT} ≤ 1.0 A	—	—	0.5	
Output noise voltage		V _{NO}	2	T _a = 25°C, I _{OUT} = 20 mA, 10 Hz ≤ f ≤ 100 kHz	—	90	—	μV _{rms}	
Ripple rejection		R.R.	3	f = 120 Hz, I _{OUT} = 20 mA, T _j = 25°C	53	60	—	dB	
Short circuit current limit		I _{SC}	1	T _j = 25°C	—	1.9	—	A	
Dropout voltage		V _D	1	T _j = 25°C, I _{OUT} = 1.0 A	—	2.0	—	V	
Average temperature coefficient of output voltage		T _{CVO}	1	I _{OUT} = 5.0 mA	—	2.0	—	mV/°C	

TA79018S
Electrical Characteristics

 (Unless otherwise specified, $V_{IN} = -27\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

Characteristics		Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit	
Output voltage		V _{OUT}	1	T _j = 25°C	-18.7	-18.0	-17.3	V	
Line regulation		Reg-line	1	T _j = 25°C	-30 V ≤ V _{IN} ≤ -24 V	—	25	180	mV
					-33 V ≤ V _{IN} ≤ -21 V	—	80	360	
Load regulation		Reg-load	1	T _j = 25°C	5 mA ≤ I _{OUT} ≤ 1.5 A	—	110	360	mV
					250 mA ≤ I _{OUT} ≤ 750 mA	—	55	180	
Output voltage		V _{OUT}	1	T _j = 25°C	-33 V ≤ V _{IN} ≤ -21 V, 5 mA ≤ I _{OUT} ≤ 1.0 A	-18.85	—	-17.15	V
Quiescent current		I _B	1	T _j = 25°C	—	4.5	8.0	mA	
Quiescent current change	Line	ΔI _B	1	T _j = 25°C	-33 V ≤ V _{IN} ≤ -21 V	—	—	1.0	mA
	Load		1		5 mA ≤ I _{OUT} ≤ 1.0 A	—	—	0.5	
Output noise voltage		V _{NO}	2	T _a = 25°C, I _{OUT} = 20 mA, 10 Hz ≤ f ≤ 100 kHz	—	110	—	μV _{rms}	
Ripple rejection		R.R.	3	f = 120 Hz, I _{OUT} = 20 mA, T _j = 25°C	52	59	—	dB	
Short circuit current limit		I _{SC}	1	T _j = 25°C	—	1.9	—	A	
Dropout voltage		V _D	1	T _j = 25°C, I _{OUT} = 1.0 A	—	2.0	—	V	
Average temperature coefficient of output voltage		T _{CVO}	1	I _{OUT} = 5.0 mA	—	2.5	—	mV/°C	

TA79020S
Electrical Characteristics

 (Unless otherwise specified, $V_{IN} = -30\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

Characteristics		Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit	
Output voltage		V _{OUT}	1	T _j = 25°C	-20.8	-20.0	-19.2	V	
Line regulation		Reg-line	1	T _j = 25°C	-32 V ≤ V _{IN} ≤ -26 V	—	28	180	mV
					-35 V ≤ V _{IN} ≤ -24 V	—	104	360	
Load regulation		Reg-load	1	T _j = 25°C	5 mA ≤ I _{OUT} ≤ 1.5 A	—	130	360	mV
					250 mA ≤ I _{OUT} ≤ 750 mA	—	70	180	
Output voltage		V _{OUT}	1	T _j = 25°C	-35 V ≤ V _{IN} ≤ -24 V, 5 mA ≤ I _{OUT} ≤ 1.0 A	-21.0	—	-19.0	V
Quiescent current		I _B	1	T _j = 25°C	—	4.6	8.0	mA	
Quiescent current change	Line	ΔI _B	1	T _j = 25°C	-36.5 V ≤ V _{IN} ≤ -25 V	—	—	1.0	mA
	Load		1		5 mA ≤ I _{OUT} ≤ 1.0 A	—	—	0.5	
Output noise voltage		V _{NO}	2	T _a = 25°C, I _{OUT} = 20 mA, 10 Hz ≤ f ≤ 100 kHz	—	140	—	μV _{rms}	
Ripple rejection		R.R.	3	f = 120 Hz, I _{OUT} = 20 mA, T _j = 25°C	50	57	—	dB	
Short circuit current limit		I _{SC}	1	T _j = 25°C	—	1.9	—	A	
Dropout voltage		V _D	1	T _j = 25°C, I _{OUT} = 1.0 A	—	2.0	—	V	
Average temperature coefficient of output voltage		T _{CVO}	1	I _{OUT} = 5.0 mA	—	3.0	—	mV/°C	


TA79024S
Electrical Characteristics

 (Unless otherwise specified, $V_{IN} = -33\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$)

Characteristics		Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage		V _{OUT}	1	T _j = 25°C		-25.0	-24.0	-23.0	V
Line regulation		Reg-line	1	T _j = 25°C	-36 V ≤ V _{IN} ≤ -30 V	—	31	240	mV
					-38 V ≤ V _{IN} ≤ -27 V	—	118	480	
Load regulation		Reg-load	1	T _j = 25°C	5 mA ≤ I _{OUT} ≤ 1.5 A	—	150	480	mV
					250 mA ≤ I _{OUT} ≤ 750 mA	—	85	240	
Output voltage		V _{OUT}	1	T _j = 25°C	-38 V ≤ V _{IN} ≤ -27 V, 5 mA ≤ I _{OUT} ≤ 1.0 A	-25.2	—	-22.8	V
Quiescent current		I _B	1	T _j = 25°C		—	4.6	8.0	mA
Quiescent current change	Line	ΔI _B	1	T _j = 25°C	-38 V ≤ V _{IN} ≤ -27 V	—	—	1.0	mA
	Load		1		5 mA ≤ I _{OUT} ≤ 1.0 A	—	—	0.5	
Output noise voltage		V _{NO}	2	T _a = 25°C, I _{OUT} = 20 mA, 10 Hz ≤ f ≤ 100 kHz		—	170	—	μV _{rms}
Ripple rejection		R.R.	3	f = 120 Hz, I _{OUT} = 20 mA, T _j = 25°C		49	56	—	dB
Short circuit current limit		I _{SC}	1	T _j = 25°C		—	1.9	—	A
Dropout voltage		V _D	1	T _j = 25°C, I _{OUT} = 1.0 A		—	2.0	—	V
Average temperature coefficient of output voltage		T _{CVO}	1	I _{OUT} = 5.0 mA		—	3.5	—	mV/°C


Test Circuit 1

V_{OUT} , Reg-line, Reg-load, I_B , ΔI_B , V_D , T_{cvo}

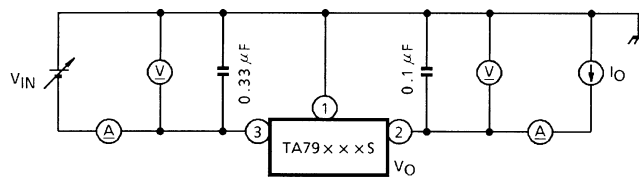


Test Circuit 2







V_{NO}




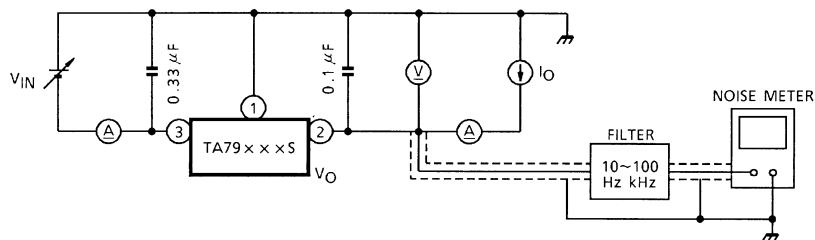


Test Circuit 3

R.R.

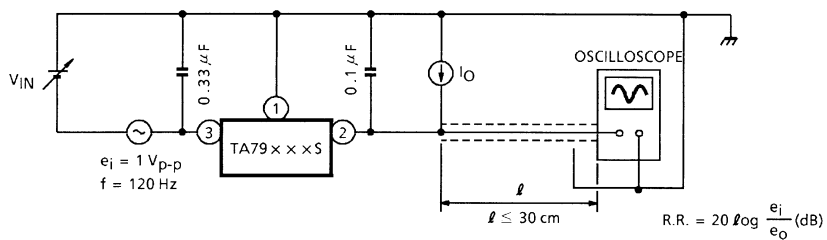

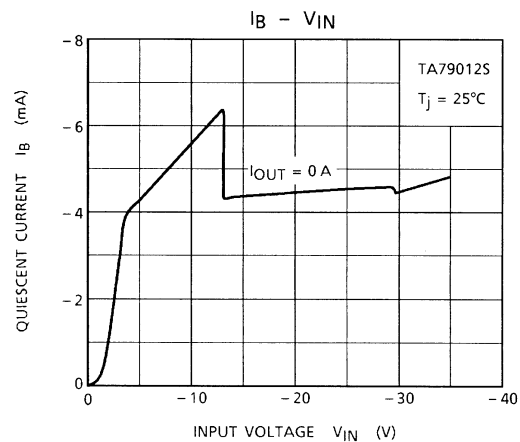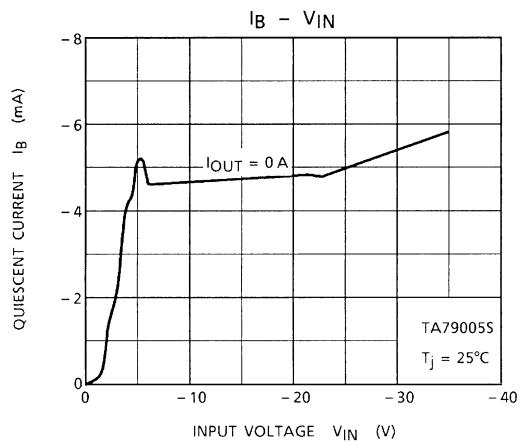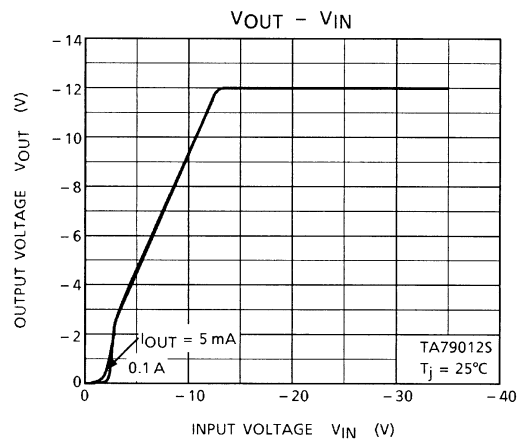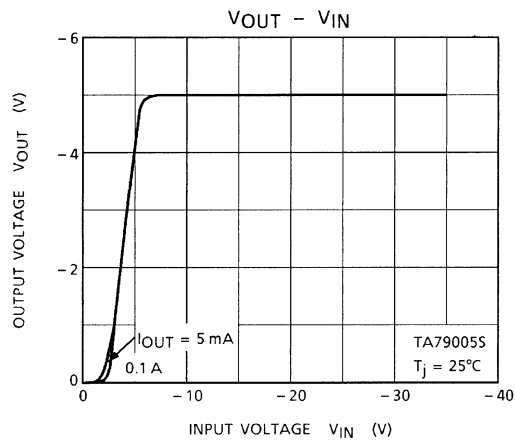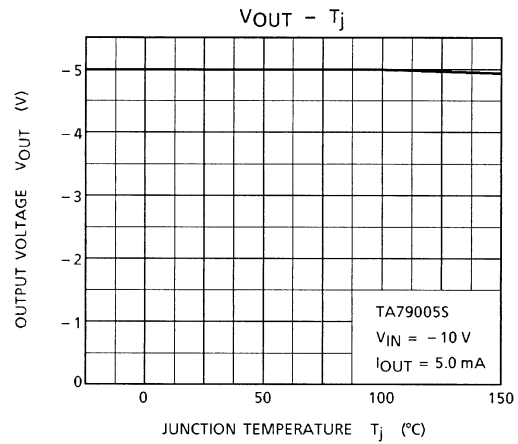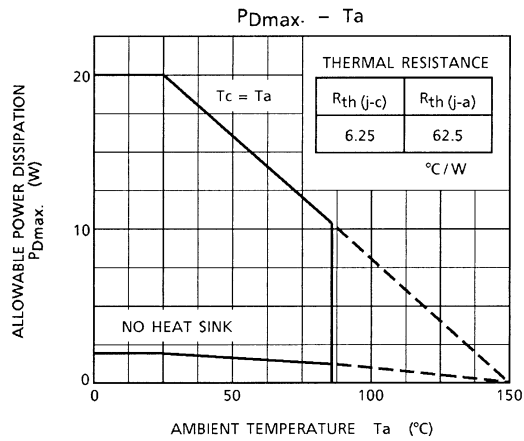


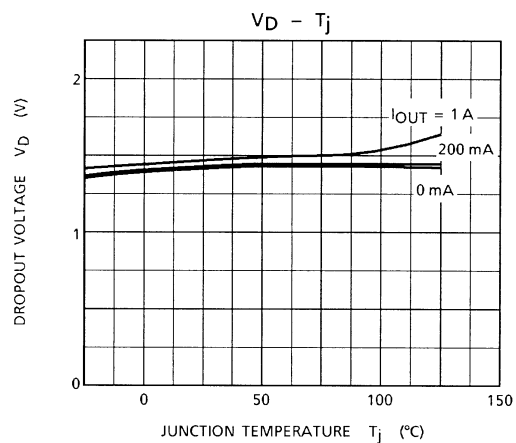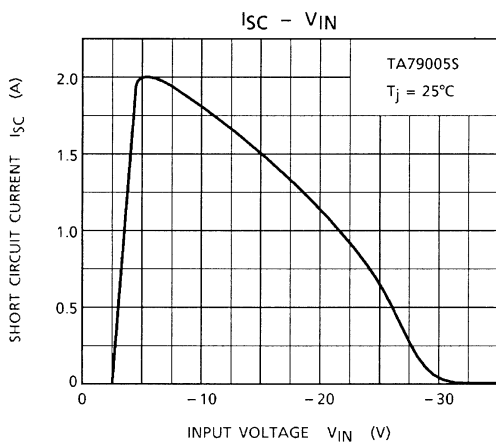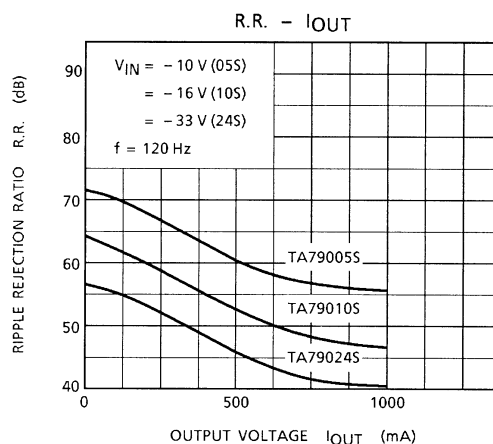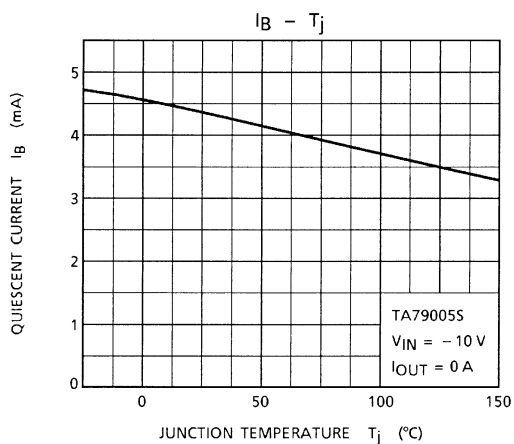

Package Dimensions

HSIP3-P-2.54A

Unit: mm

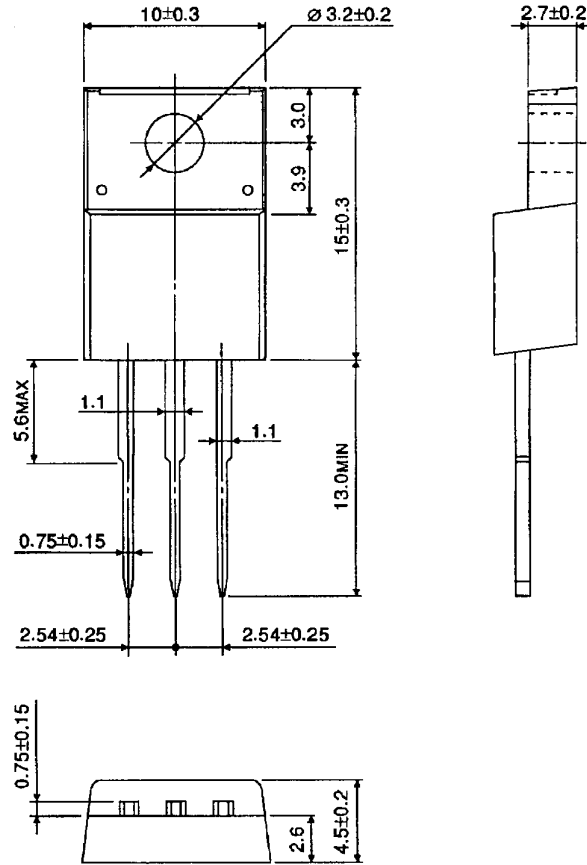

Weight: 1.7 g (typ.)

RESTRICTIONS ON PRODUCT USE

030619EBA

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.