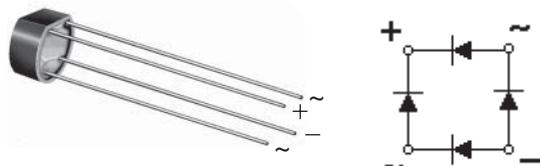


Glass Passivated Single-Phase Bridge Rectifier

Major Ratings and Characteristics

| | |
|-------------|----------------|
| $I_{F(AV)}$ | 2.0 A |
| V_{RRM} | 50 V to 1000 V |
| I_{FSM} | 60 A |
| I_R | 5.0 μ A |
| V_F | 1.1 V |
| T_j max. | 150 °C |

Case Style WOG


Features

- UL Recognition, file number E54214
- Ideal for printed circuit boards
- Typical I_R less than 0.5 μ A
- High case dielectric strength
- High surge current capability
- Solder Dip 260 °C, 40 seconds



Mechanical Data

Case: WOG

Epoxy meets UL-94V-0 Flammability rating

Terminals: Silver plated (E4 Suffix) leads, solderable per J-STD-002B and JESD22-B102D

Polarity: As marked on body

Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for Power Supply, Adapter, Charger, lighting Ballaster on Consumers and Home Appliances applications

Maximum Ratings

Ratings at 25 °C ambient temperature unless otherwise specified.

| Parameter | Symbols | 2W005G | 2W01G | 2W02G | 2W04G | 2W06G | 2W08G | 2W10G | Units |
|---|----------------|---------------|-------|-------|-------|-------|-------|-------|----------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum average forward rectified current at 0.375" (9.5 mm) lead length (See Fig. 1) | $I_{F(AV)}$ | 2.0 | | | | | | | A |
| Peak forward surge current single sine-wave superimposed on rated load | I_{FSM} | 60 | | | | | | | A |
| Rating for fusing ($t < 8.3$ ms) | I^2t | 15 | | | | | | | A^2sec |
| Operating junction and storage temperature range | T_j, T_{STG} | - 55 to + 150 | | | | | | | °C |

2W005G thru 2W10G



Vishay Semiconductors

Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

| Parameter | Test condition | Symbols | 2W005G | 2W01G | 2W02G | 2W04G | 2W06G | 2W08G | 2W10G | Units |
|---|---|---------|--------|-------|-------|-------|-------|-------|-------|---------------|
| Maximum instantaneous forward voltage drop per leg | at 2.0 A | V_F | | | | 1.1 | | | | V |
| Maximum DC reverse current at rated DC blocking voltage per leg | $T_A = 25^\circ\text{C}$ $T_A = 125^\circ\text{C}$ | I_R | | | 5.0 | 500 | | | | μA |
| Typical junction capacitance per leg | at 4.0 V, 1 MHz | C_J | | 40 | | | 20 | | | pF |

Thermal Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

| Parameter | Symbols | 2W005G | 2W01G | 2W02G | 2W04G | 2W06G | 2W08G | 2W10G | Units |
|--|------------------------------------|--------|-------|-------|-------|-------|-------|-------|---------------------------|
| Typical thermal resistance per leg (1) | $R_{\theta JA}$ $R_{\theta JL}$ | | | | 40 | | | | $^\circ\text{C}/\text{W}$ |

Notes:

(1) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5 mm) lead length P.C.B. mounting

Ratings and Characteristics Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)

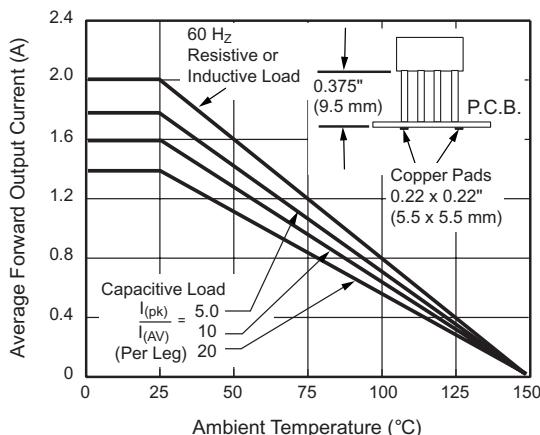


Figure 1. Derating Curve Output Rectified Current

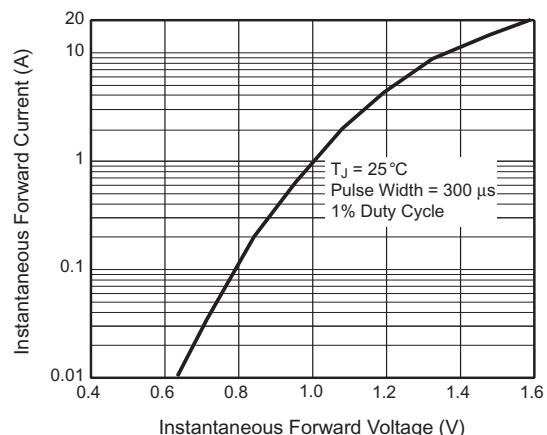


Figure 3. Typical Forward Characteristics Per Leg

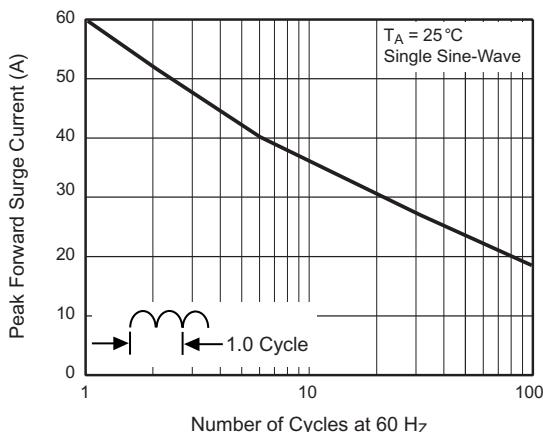


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

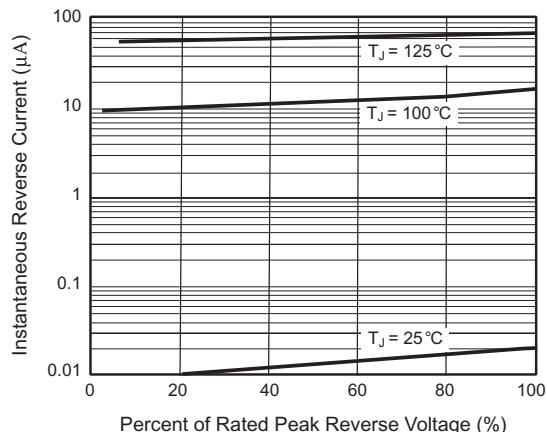


Figure 4. Typical Reverse Leakage Characteristics Per Leg

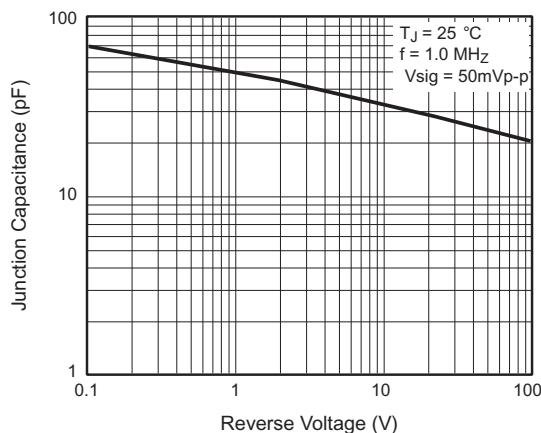


Figure 5. Typical Junction Capacitance Per Leg

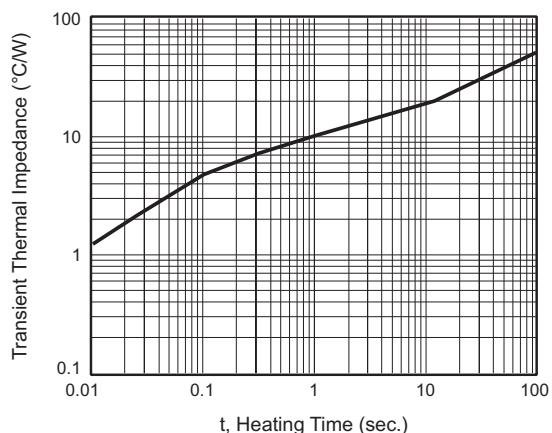


Figure 6. Typical Transient Thermal Impedance

Package outline dimensions in inches (millimeters)

