


551-5172, R F Choke, moulded, axial, .022μH thru .082μH.

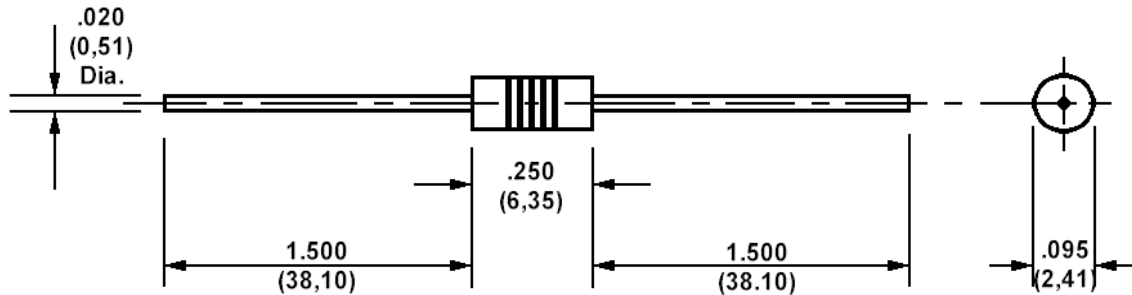

How to order code

551-5172-XX-YY-ZZ

Basic Part No XX = Inductance identifier, YY = tolerance, ZZ = packaging

Basic Part No.	XX	Inductance	Colour Code			Q Min.	Test Freq. (MHz)	DCR Max. (W)	DC Max. (mA)	SRF Min. (MHz)
			A	B	C					
551-5172	-01	22nH	Black	Red	Red	33	30	.0055	3000	1245
	-02	27nH	Black	Red	Violet	33	30	.0085	3000	1200
	-03	33nH	Black	Orange	Orange	33	30	.0255	2800	1175
	-04	39nH	Black	Orange	White	33	30	.0330	2500	1130
	-05	47nH	Black	Yellow	Violet	33	25	.0380	2350	1060
	-06	56nH	Black	Green	Blue	33	25	.0480	2080	990
	-07	68nH	Black	Blue	Grey	33	25	.0550	1940	900
	-08	82nH	Black	Grey	Red	33	25	.0650	1790	750

TOLERANCE (YY)		
-02	±10%	Silver

PACKAGING (ZZ)	
-00	Loose
-36	Taped

Temperature range: -55°C to +125°C