



Siemens Matsushita Components

# EMC

# Components

SMT Inductors **SMD**  
SIMID 1812-Z

Data Book Supplement

**Size 1812/4532 (inch/mm)**  
**Rated inductance 0,22 to 1000  $\mu$ H**  
**Rated current 0,04 to 0,7 A**

#### **Construction**

- Ferrite core
- Laser soldered, molded epoxy encapsulation
- Temperature index of wire enamel: 155 °C

#### **Features**

- Extended induction range
- High  $Q$  factor
- Suitable for reflow (IR and vapor phase) and wave soldering
- Different measuring frequencies for  $L$  and  $Q$

#### **Applications**

- Filtering of supply voltages, coupling, decoupling
- Antenna systems
- Automotive electronics
- Telecommunications

#### **Terminals**

- Tinned
- Base material: phosphor bronze, 2–4  $\mu$ m Cu,  $\geq 5 \mu$ m SnPb
- Suitable for soldering and conductive adhesion
- No leaching during wave soldering

#### **Marking**

Marking on component:  
 $L$  value (in  $\mu$ H) and tolerance of  $L$  value (coded),


Minimum marking on reel:  
Manufacturer, part number, ordering code,  
 $L$  value and tolerance of  $L$  value,  
quantity, date of packing

#### **Delivery mode**


12-mm blister tape wound on 178-mm  $\varnothing$  reel

**Dimensional drawing**

Size 1812/4532 (inch/mm),  
approx. weight 130 mg

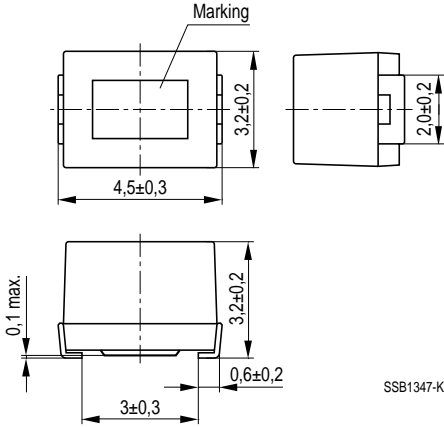

**PCB layout recommendation**



Dimensions (mm)	<i>a</i>	<i>b</i>	<i>c</i>
	2,4...2,6	5,5...6,0	2,0...3,0

**Characteristics and ordering codes**

For further technical data see page 8.

$L_R$ $\mu\text{H}$	Tolerance	$f_L$ MHz	$Q_{\min}$	$f_Q$ MHz	$I_R$ mA	$R_{\max}$ $\Omega$	$f_{\text{res, min}}$ MHz	Ordering code <sup>1)</sup>
0,22	$\pm 20\%$ $\hat{=}\text{M}$	1	30	25,2	700	0,30	230	B82432-Z1221-M
0,27		1	30	25,2	650	0,32	200	B82432-Z1271-M
0,33		1	30	25,2	630	0,35	180	B82432-Z1331-M
0,39		1	30	25,2	620	0,37	155	B82432-Z1391-M
0,47		1	30	25,2	580	0,40	135	B82432-Z1471-M
0,56		1	30	25,2	560	0,42	120	B82432-Z1561-M
0,68		1	30	25,2	530	0,48	105	B82432-Z1681-M
0,82		1	30	25,2	500	0,50	90	B82432-Z1821-M
1,0		$\pm 10\%$ $\hat{=}\text{K}$	1	30	25,2	470	0,52	80
1,2	1		30	25,2	460	0,55	70	B82432-Z1122-+
1,5	$\pm 20\%$ $\hat{=}\text{M}$	1	30	25,2	430	0,61	60	B82432-Z1152-+
1,8		1	30	7,96	410	0,61	50	B82432-Z1182-+
2,2	$\pm 5\%$ $\hat{=}\text{J}$	1	30	7,96	410	0,61	45	B82432-Z1222-+
2,7		1	50	7,96	400	0,61	43	B82432-Z1272-+
3,3	$\pm 10\%$ $\hat{=}\text{K}$	1	50	7,96	380	0,66	39	B82432-Z1332-+
3,9		1	50	7,96	360	0,74	36	B82432-Z1392-+
4,7		1	50	5,0	350	0,81	33	B82432-Z1472-+
5,6		1	50	5,0	330	0,88	30	B82432-Z1562-+
6,8		1	50	5,0	310	1,0	26	B82432-Z1682-+
8,2	1	50	5,0	250	1,6	24	B82432-Z1822-+	
10	1	50	5,0	235	1,8	22	B82432-Z1103-+	
12		1	50	5,0	225	1,9	20	B82432-Z1123-+
15		1	50	5,0	215	2,1	18	B82432-Z1153-+
18		1	50	2,52	205	2,3	16	B82432-Z1183-+
22		1	50	2,52	195	2,6	15	B82432-Z1223-+
27		1	50	2,52	185	2,9	13	B82432-Z1273-+
33		1	50	2,52	175	3,1	12	B82432-Z1333-+
39		1	50	2,52	165	3,6	10	B82432-Z1393-+
47		1	50	2,52	130	4,2	9,7	B82432-Z1473-+
56		0,1	40	2,52	125	4,7	9,0	B82432-Z1563-+
68		0,1	40	2,52	115	5,3	8,2	B82432-Z1683-+
82		0,1	40	2,52	110	5,9	7,5	B82432-Z1823-+
100		0,1	40	2,52	105	8,8	6,7	B82432-Z1104-+

1) Replace the + by the code letter for the inductance tolerance.


**Characteristics and ordering codes**

For further technical data see page 8.


$L_R$ μH	Tolerance	$f_L$ MHz	$Q_{min}$	$f_Q$ MHz	$I_R$ mA	$R_{max}$ Ω	$f_{res, min}$ MHz	Ordering code <sup>1)</sup>
120	± 5 %	0,1	40	1,5	100	10	6,1	B82432-Z1124++
150	≐ J	0,1	40	1,5	95	11	5,5	B82432-Z1154++
180	± 10 %	0,1	40	1,5	85	13	5,1	B82432-Z1184++
220	≐ K	0,1	40	0,796	85	13	4,5	B82432-Z1224++
270		0,1	40	0,796	80	14	4,1	B82432-Z1274++
330		0,1	40	0,796	75	16	3,7	B82432-Z1334++
390		0,1	40	0,796	70	19	3,3	B82432-Z1394++
470		0,1	30	0,796	55	31	3,3	B82432-Z1474++
560		0,1	30	0,796	50	35	2,7	B82432-Z1564++
680		0,1	30	0,796	50	39	2,5	B82432-Z1684++
820		0,1	30	0,796	45	45	2,4	B82432-Z1824++
1000		0,1	30	0,796	40	53	2,1	B82432-Z1105++

1) Replace the + by the code letter for the inductance tolerance.

**Taping**

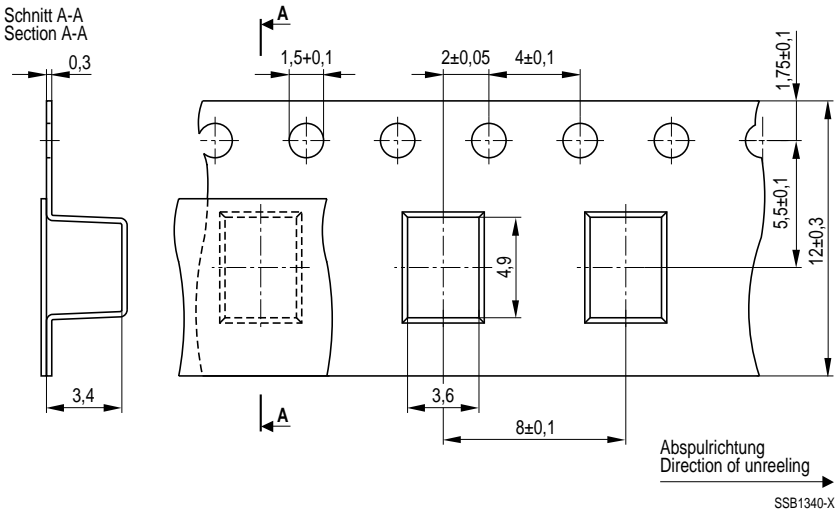

**Packing**

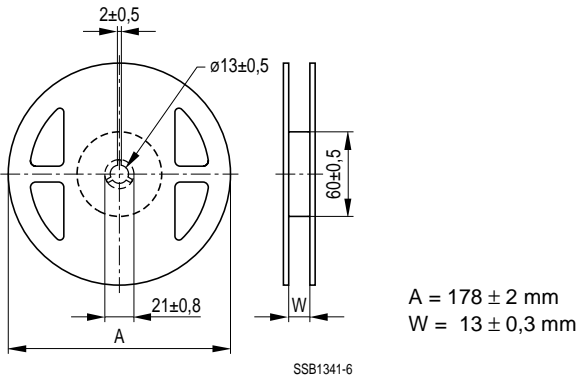

Packing unit: 500 pcs. per reel

**General technical data**

Rated inductance $L_R$	Measured at frequency $f_L$ , with impedance analyzer HP 4194A
Q factor $Q_{\min}$	Measured at frequency $f_Q$ , with impedance analyzer HP 4194A
Rated current $I_R$	Maximum permissible dc with an inductance decrease of $\Delta L/L_0 \leq 10\%$ and/or temperature increase of $\leq 20\text{ K}$ at rated temperature $T_R = 85^\circ\text{C}$
Self resonance frequency $f_{\text{res, min}}$	Measured with network analyzer HP 8753D
DC resistance $R_{\max}$	Measured at $20^\circ\text{C}$ ambient temperature, Measuring current $< I_R$
Climatic category	In accordance with IEC 68-1 40/085/56 ( $-40^\circ\text{C}/+85^\circ\text{C}/56$ days damp heat test)
Solderability	$(230 \pm 5)^\circ\text{C}$ , $(3 \pm 0,5)$ s Wetting of soldering area: $\geq 90\%$
Resistance to soldering heat	In accordance with IEC 68-2-20, test Tb $260^\circ\text{C}$ , 10 s
Permissible PCB bending	2 mm (100 mm long standard PCB)

**Published by Siemens Matsushita Components GmbH & Co. KG**  
**Marketing Kommunikation, Postfach 80 17 09, D-81617 München**

© Siemens Matsushita Components 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of Siemens AG, Passive Components and Electron Tubes Group, in the Federal Republic of Germany or the international Siemens Companies and Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.