

# SPECIFICATIONS

# AGP

## Mechanical

**Contact Retention Force:** 0.30kgf min.  
**Mating force:** 93.56gf max. per contact pair  
**Unmating force:** 9.92~56.13gf per contact pair  
**Durability:** 50 Cycles

## Electrical


**Current Rating:** 1A max.  
**Contact Resistance:** 10mW max. initial  
**Dielectric Withstanding Voltage:** 400V  
**Insulation Resistance:** 800MW min.

## Physical


**Housing:** Thermoplastic, UL 94V-0 rated, in Color Brown  
**Contact:** Copper alloy  
**Hook:** Copper alloy  
**Plating:** See "ORDERING INFORMATION"  
**Operating Temperature:** 0 to +85

## EE Series

**Vertical Type W/O Retainer**  
**1.00mm [.039"] Pitch**  
**124 Pos.**

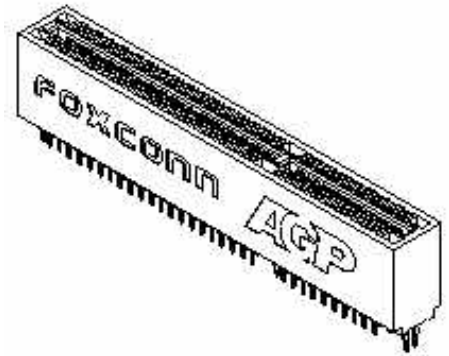

# DRAWING

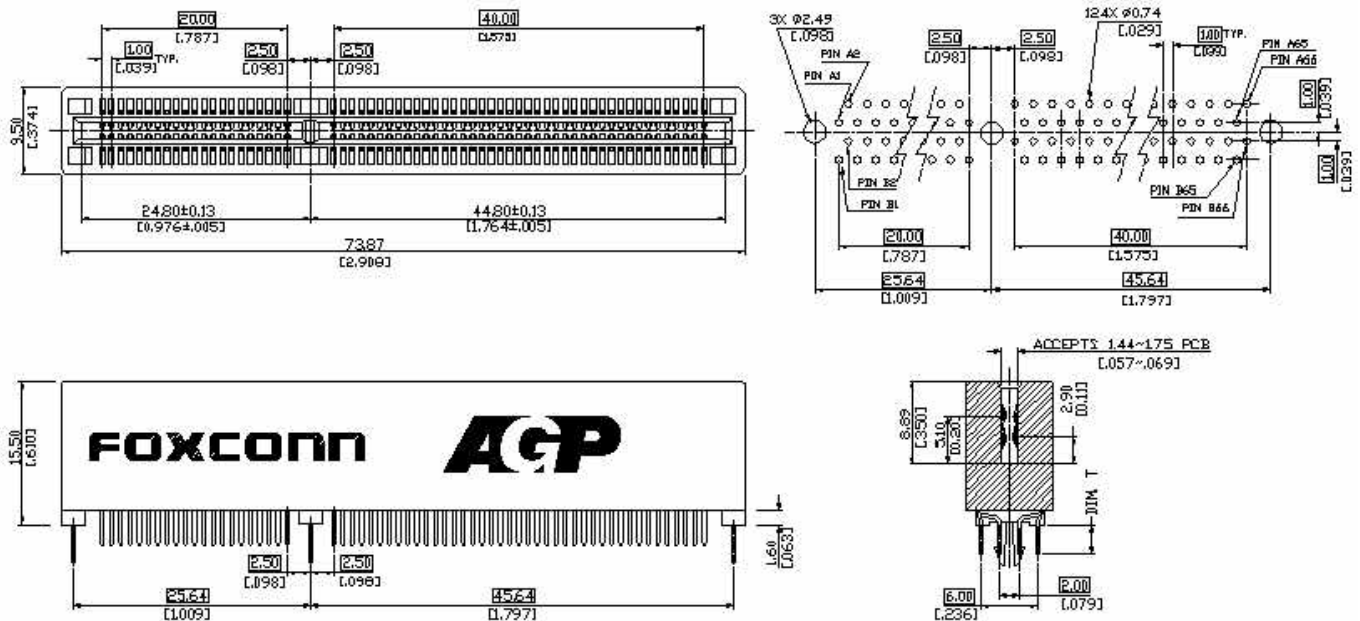

# ORDERING INFORMATION

PRODUCT NO.: EE 0 62 \* \* - KTB - \* \*

Series Prefix :  
 1.0 [.039] Pitch Edge  
 Card Conn.

Termination Type:  
 0= Straight

No. Of Pos:  
 62= 62/124 Pos.

Tail length Type :  
 1= 2.54[.100]

Plating Type :  
 DF= Lead Free

Extension Code

Gold Plating :  
 1= Gold Flash  
 3= 30u" Gold Plating  
 7= 15u" Gold Plating

EE0621*-KTB-**-**	2.54 [.100]
P/N	DIM.T