


SK7963


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
9-8-06	NC	ECO 26652		YK	

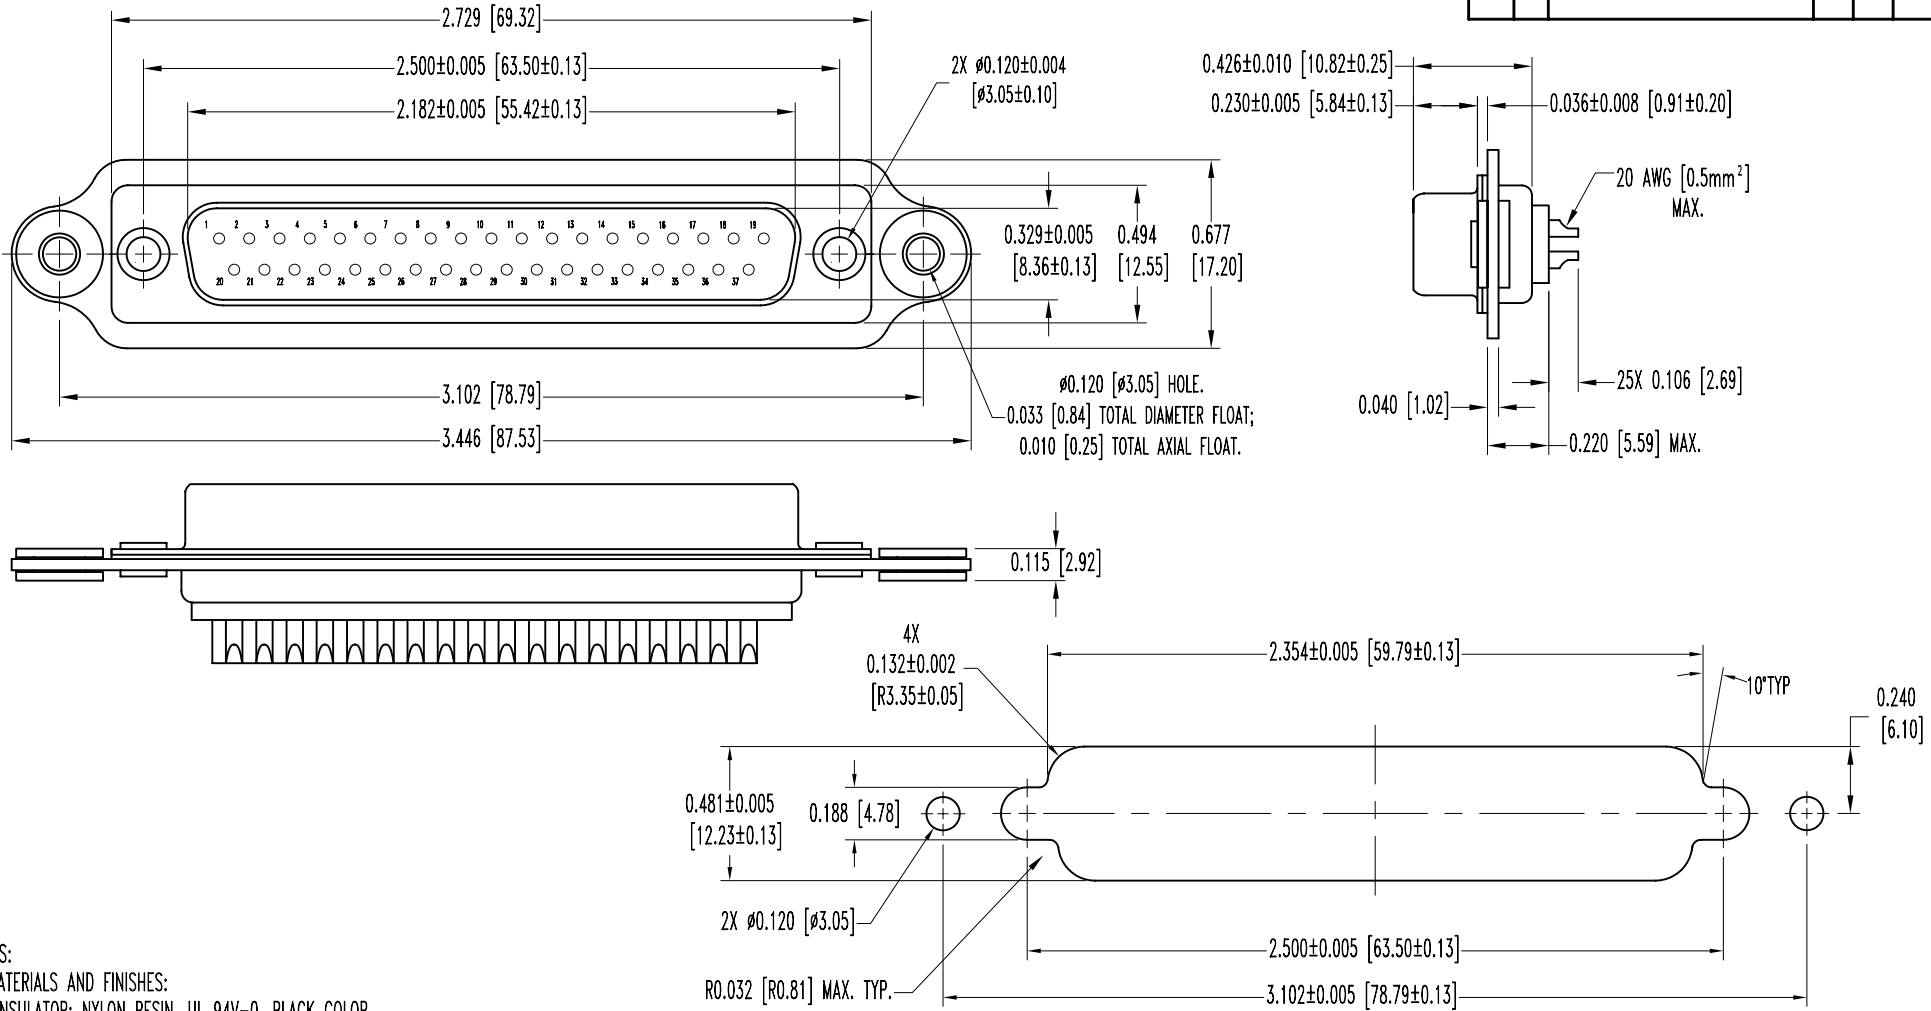

PANEL CUTOUT

- NOTES:
- MATERIALS AND FINISHES:  
 INSULATOR: NYLON RESIN, UL 94V-0, BLACK COLOR.  
 CONTACTS: PRECISION MACHINED BRASS ALLOY, GOLD FLASH OVER NICKEL PLATE.  
 SHELLS: STEEL, TIN PLATE.  
 MOUNTING PLATE: ALUMINUM, YELLOW ANODIZED.  
 FLOAT BUSHINGS: BRASS, ZINC PLATE WITH CHROMATE SEAL.  
 FLOAT WASHERS: BRASS, ZINC PLATE WITH CHROMATE SEAL.
  - ELECTRICAL CHARACTERISTICS:  
 CONTACT CURRENT RATING: 7.5 AMPERES NOMINAL.  
 INITIAL CONTACT RESISTANCE: 0.008 OHMS MAXIMUM.  
 INSULATOR RESISTANCE: 5 G OHMS.  
 WORKING VOLTAGE: 300 V r.m.s.  
 TEMPERATURE RANGE: -55°C TO +125°C.
  - MOS 759.1 ALLOWS FOR MOUNTING PLATE TO BE INSTALLED.
  - DIMENSIONS ARE IN INCHES [MILLIMETERS].

 <b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com		SCALE		DRAWN BY	
DECIMAL TOL. ± 0.015 [0.38]		MD SERIES		N.T.S.	
ANGULAR TOL. ± 5°		TITLE		APPROVED BY	
		MD37M2000X-759.1		YK	
DATE		DRAWING NUMBER		REV.	
9-8-06		SK7963		NC	