


PICO880

4th Generation Intel® Core™ i7/i5/i3 and Celeron processor Pico ITX SBC with DP/LVDS, 1 GE & Audio

NEW

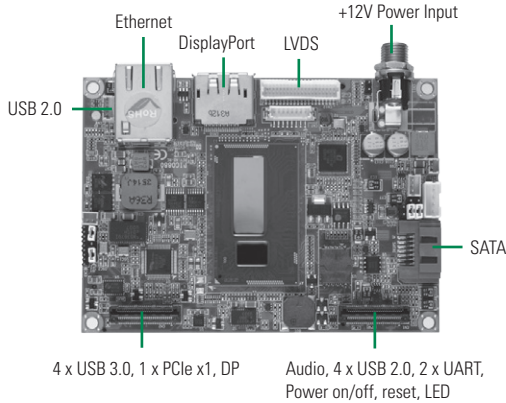

System

CPU	4rd Generation Intel® i7/i5/i3/Celeron® processor onboard
System Memory	1 x 204-pin DDR3L-1600 SO-DIMM max. up to 8GB
Chipset	N/A
BIOS	AMI
SSD	N/A
Watchdog Timer	255 levels, 1~255 sec.
Expansion Interface	1 x Full-Size Mini PCI Express Mini Card with mSATA supported 1 x PCIe x1, 2 x UART, 1 x DP, 4 x USB 3.0, 4 x USB 2.0 and 1 x HD audio (through expansion connector)
Battery Lithium	Lithium 3V/220mAH
Power Input	DC power jack connector +12V DC-in only AT Auto Power On function supported
Power Requirements	TBD
Size	100 x 72 mm
Board Thickness	1.6 mm
Temperature	-20°C ~ +70°C (-4°F ~ 158°F), operation
Relative Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	N/A
SATA	1 x SATA-600
Hardware Monitoring	Detect CPU/system temperature, voltage and fan speed
Ethernet	1 port 10/100/1000 Mbps supports Wake-on-LAN, RPL/PXE Boot ROM with Intel i218LM
Audio	HD Codec audio as MIC-in/Line-out with Realtek ALC662
USB	1 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	N/A


Display

Chipset	Intel integrated Gfx graphic engine
Memory Size	Share System memory
Display Interface	1 x LVDS; 18/24-bit single/dual channel 1 x DisplayPort

Features


- 4th Generation Intel® Core™ i7/i5/i3 and Celeron® processor
- 1 DDR3L SO-DIMM supports up to 8GB memory capacity
- 1 USB 2.0 port
- Intel® AMT9.5 supported

DDR3L SO-DIMM




▲ Rear view


PCI Express Mini Card (Full-size) w/mSATA supported




▲ Assembly view

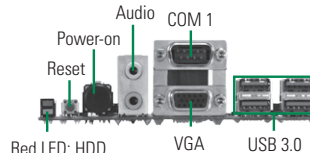

Red LED: HDD
Green LED: power-on
▲ AX93275

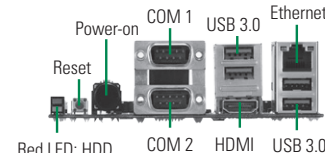

Red LED: HDD
Green LED: power-on
▲ AX93276

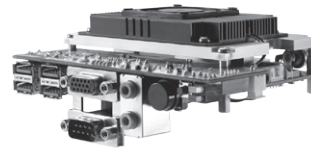

▲ Assembly view

Packing List

Standard

Quick installation guide, User's Manual/Utility CD and accessories

Accessories

Part Number	Description	Qty
	SATA cable	1
	SATA power cable	1
	USB cable	1
	Heatspreader	1
	Heatsink	1

Ordering Information

Standard

PICO880PGA-i7	4th Gen Intel® Core™ i7-4650U 1.7GHz Pico-ITX SBC with DP/LVDS, 10/100/1000Mbps, 1 USB 2.0
PICO880PGA-i5	4th Gen Intel® Core™ i5-4300U 1.9GHz Pico-ITX SBC with DP/LVDS, 10/100/1000Mbps, 1 USB 2.0
PICO880PGA-i3	4th Gen Intel® Core™ i3-4010U 1.7GHz Pico-ITX SBC with DP/LVDS, 10/100/1000Mbps, 1 USB 2.0
PICO880PGA-2980U	4th Gen Intel® Celeron® 2980U 1.6GHz Pico-ITX SBC with DP/LVDS, 10/100/1000Mbps, 1 USB 2.0

Optional

I/O board	RS-232/422/485	RS-232	USB 3.0	Display	LAN
AX93275	1	1	4	VGA	N/A
AX93276	1	1	4	HDMI	1

SBC
Services
and Solutions

Systems
on
Modules

Embedded
SBCs
>EPIC

Embedded
SBCs
>3.5" Capa

Embedded
SBCs
>Nano-ITX

Embedded
SBCs
>Pico-ITX

Embedded
SBCs
>PC/104

Industrial
Mother-
boards

Slot
CPU
Cards

Accessories

Appendix