


RoHS Compliant Product

FEATURES

- Ideal for printed circuit board
- Low forward voltage drop, high current capability
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- These are Halogen & Pb Free components

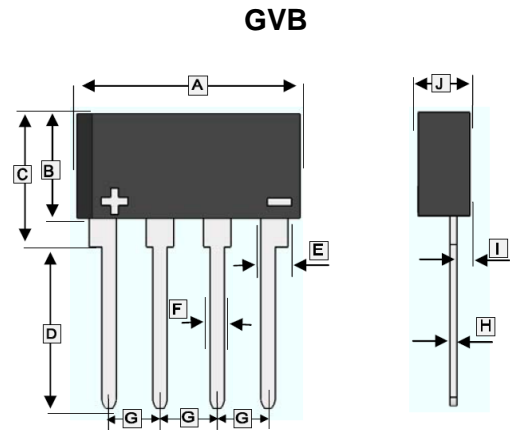

| REF. | Millimeter | | REF. | Millimeter | |
|------|------------|------|------|------------|------|
| | Min. | Max. | | Min. | Max. |
| A | 15.3 | 15.9 | F | 0.70 | 0.90 |
| B | 7.00 | 7.40 | G | 3.90 | 4.10 |
| C | 9.00 | 9.60 | H | 0.40 | 0.60 |
| D | 10.0 | - | I | 0.70 | 1.10 |
| E | 1.20 | 1.40 | J | 3.20 | 3.60 |

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)

| Parameter | Symbol | Part Number | | | | Unit |
|--|-----------------|--------------|-----------|-----------|-----------|----------------------|
| | | S2GVB20-C | S2GVB40-C | S2GVB60-C | S2GVB80-C | |
| Maximum Recurrent Peak Reverse Voltage | V_{RRM} | 200 | 400 | 600 | 800 | V |
| Average Rectified Output Current @60Hz sine wave, R-load, $T_A=25^\circ\text{C}$ | I_o | 2 | | | | A |
| Peak Forward Surge Current @ 60Hz sine wave, 1 cycle, $T_A=25^\circ\text{C}$ | I_{FSM} | 50 | | | | A |
| Maximum Peak Forward Voltage ² | V_{FM} | 1.05 | | | | V |
| Peak Reverse Current ¹ | I_{RRM} | 10 | | | | μA |
| I^2t Rating for Fusing @ $1\text{ms} \leq t < 8.3\text{ms}$, $T_J=25^\circ\text{C}$ | I^2t | 10.4 | | | | A^2s |
| Typical Thermal Resistance | $R_{\theta JA}$ | 62 | | | | $^\circ\text{C/W}$ |
| Typical Thermal Resistance | $R_{\theta JL}$ | 16 | | | | $^\circ\text{C/W}$ |
| Operating and Storage temperature range | T_J, T_{STG} | 150, -40~150 | | | | $^\circ\text{C}$ |


Notes :

1. $V_{RM}=V_{RRM}$, Pulse measurement, Rating of per diode.
2. $I_{FM}=0.75\text{A}$, Pulse measurement, Rating of per diode


RATINGS AND CHARACTERISTIC CURVES

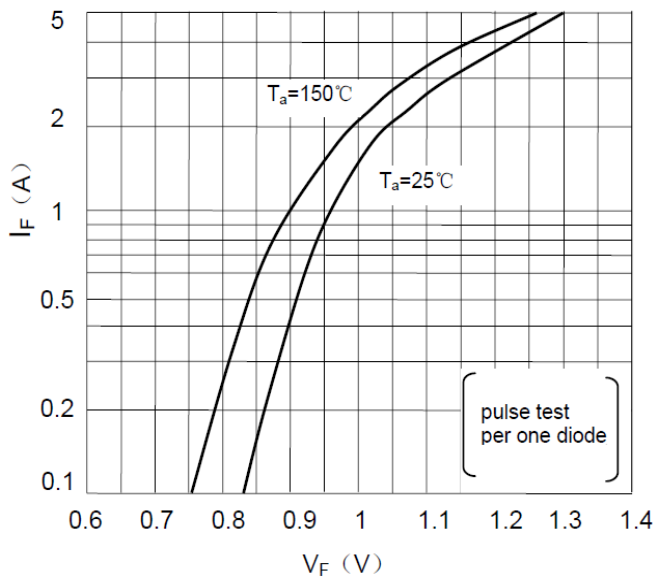


Forward Characteristics

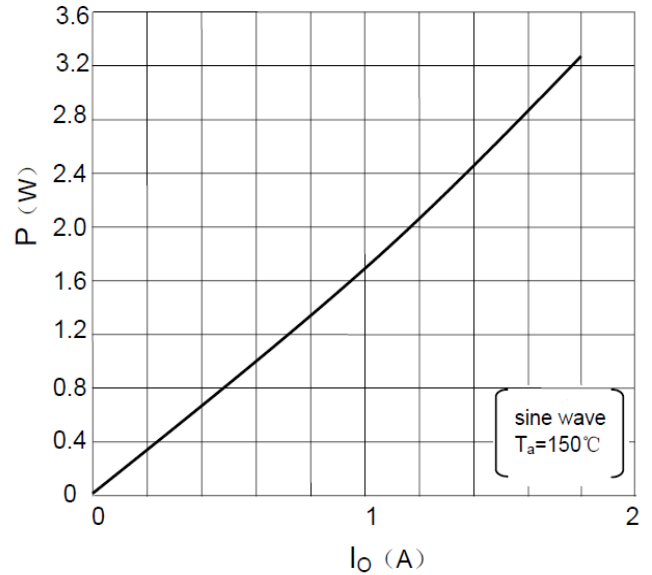

P- I_O Curve

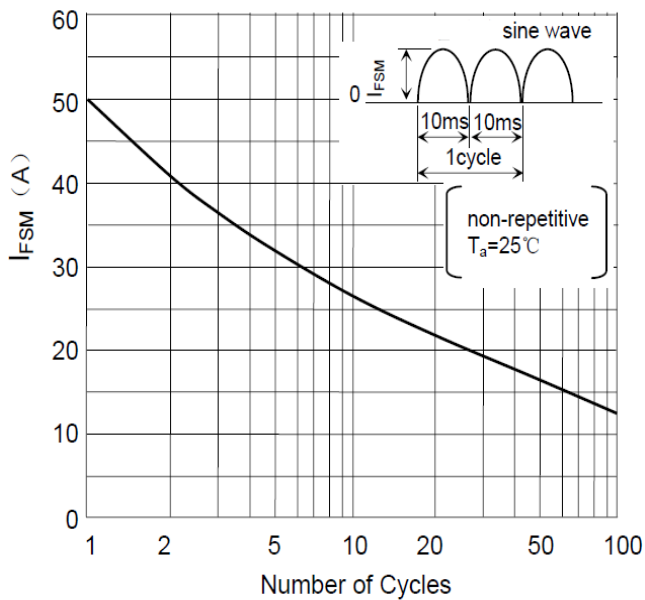

Surge Forward Current Capability

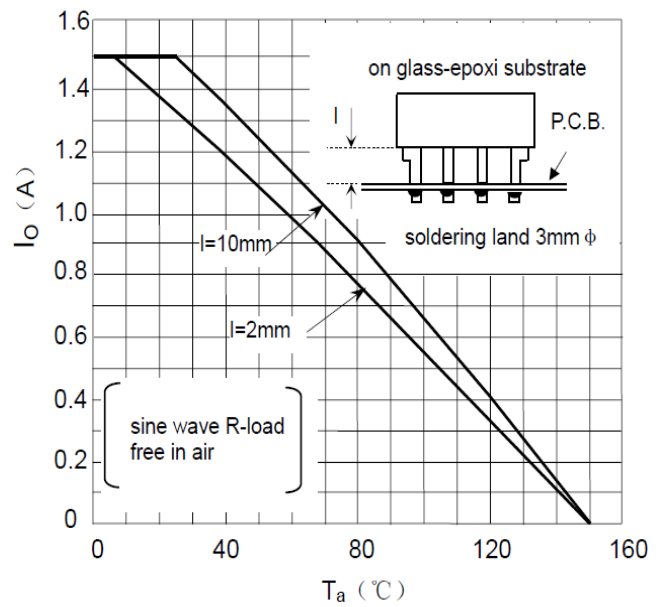

I_O - T_a Curve