
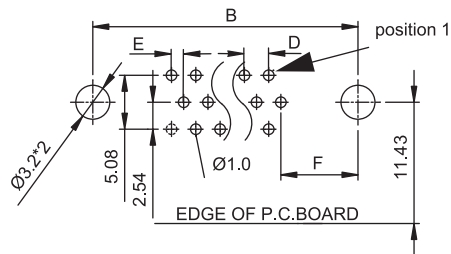


0.64\*0.60

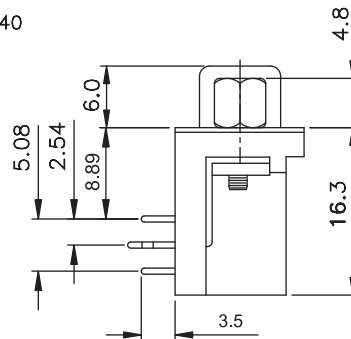

RECOMMENDED P.C.B LAYOUT - COMPONENT VIEW  
FITS FOR 1.6MM PCB / TOLERANCES:  $\pm 0.05\text{mm}$

#### TECHNICAL CHARACTERISTICS

**MATERIAL**  
INSULATOR: PBT  
FLAMABILITY RATING: UL94-V0  
COLOR: BLACK  
CONTACT MATERIAL: COPPER ALLOY  
CONTACT TYPE: STAMPED  
CONTACT PLATING: SELECTIVE GOLD  
SHIELDING: STEEL NICKEL PLATED  
QUALITY CLASS: 3 AS PER CECC 75 301-802

**ENVIRONMENTAL**  
OPERATING TEMPERATURE: -40 UP TO 85°C  
COMPLIANCE: LEAD FREE AND ROHS

**ELECTRICAL**  
CURRENT RATING: 3A AC,DC  
WORKING VOLTAGE: 60V AC,DC  
INSULATOR RESISTANCE: >5000 MOHM  
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC/MN  
CONTACT RESISTANCE: 30 mOHM MAX

**SOLDERING:** WAVE PROCESS ONLY

**PACKAGING**  
TRAY


**ACCESSORIES**  
UNC 4-40 RIVET / HEX SCREW / BOARD LOCK

#### DIMENSION

PINS	A	B	C	D	E	F
15	16.3	25.0	30.8	2.29	1.14	7.04
26	24.6	33.3	39.2	2.29	1.14	6.88
44	38.3	47.1	53.1	2.29	1.14	6.88
62	54.8	63.5	69.4	2.41	1.20	7.00

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

X. =  $\pm 0.5$   
.X =  $\pm 0.3$   
.XX =  $\pm 0.2$



APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1

DRAW:

**DESCRIPTION: D-SUB FEMALE HIGH DENSITY ANGLED PCB CONNECTOR WITH SCREW**

**WERI PART NO: 618 0xx 330 923**

SIZE

**A4**