

## Transient Voltage Suppressors for ESD Protection

### ESDXXV52D-C Series

#### Description

The ESDXXV52D-C is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.


#### Feature

- u 100 Watts Peak Pulse Power per Line (tp=8/20µs)
- u Protects one I/O line
- u Low clamping voltage
- u Working voltages : 3.3V, 5V, 8V
- u Low leakage current
- u IEC61000-4-2 (ESD) ±30kV (air), ±30kV (contact)
- u IEC61000-4-4 (EFT) 40A (5/50ns)


#### Applications

- u Cell Phone Handsets and Accessories
- u Microprocessor based equipment
- u Personal Digital Assistants (PDA's)
- u Notebooks, Desktops, and Servers
- u Portable Instrumentation
- u Peripherals
- u Pagers

SOD-523



#### Functional Diagram



#### Mechanical Characteristics

- u SOD-523 Package
- u Molding Compound Flammability Rating : UL 94V-0
- u Weight 2 Milligrams (Approximate)
- u Quantity Per Reel : 3,000pcs
- u Reel Size : 7 inch
- u Lead Finish : Lead Free

#### Mechanical Characteristics


Symbol	Parameter	Value	Units
P <sub>PP</sub>	Peak Pulse Power (tp=8/20µs waveform)	100	W
T <sub>L</sub>	Lead Soldering Temperature	260 (10sec)	°C
T <sub>STG</sub>	Storage Temperature Range	-55 to +150	°C
T <sub>J</sub>	Operating Temperature Range	-55 to +150	°C
	IEC61000-4-2 (ESD)		
	Air Discharge	±30	KV
	Contact Discharge	±30	
	IEC61000-4-4 (EFT)	40	A

# Transient Voltage Suppressors for ESD Protection

## ESDXXV52D-C Series

### I-V Curve Characteristics

Symbol	Parameter
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Maximum Reverse leakage Current @ $V_{RWM}$
$I_T$	Test Current
$V_B$	Breakdown Voltage @ $I_T$

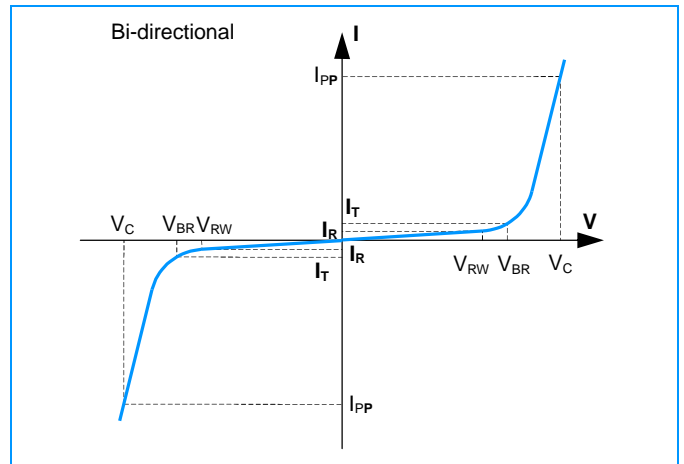

### Electrical Characteristics (@ 25°C Unless Otherwise Specified)

Part Number	Device Marking	$V_{RWM}$ (V) (Max.)	$V_B$ (V) (Min.)	$I_T$ (mA)	$V_C$ @1A (Max.)	$V_C$		$I_R$ ( $\mu$ A) (Max.)	C (pF) (Typ.)
						(Max.)	(@A)		
ESD3.3V52D-C	CT	3.3	4	1	7	12	8	1	10
ESD05V52D-C	DT	5	6	1	9.8	20	5	1	10
ESD08V52D-C	GT	8	8.5	1	17.5	25	3	1	7

### Characteristic Curves

Fig1. 8/20 $\mu$ s Pulse Waveform


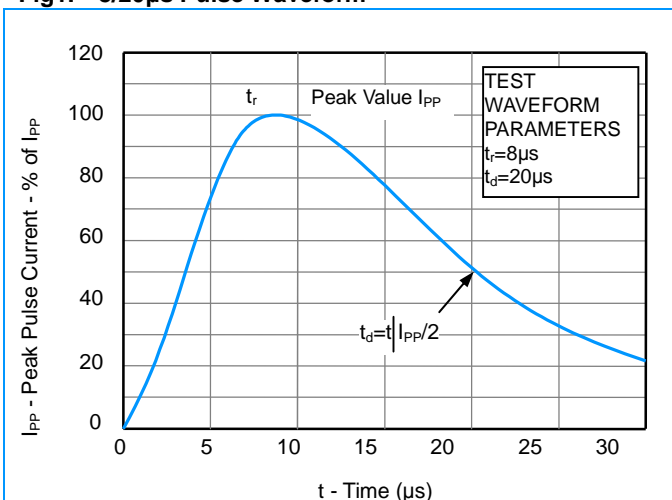


Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)

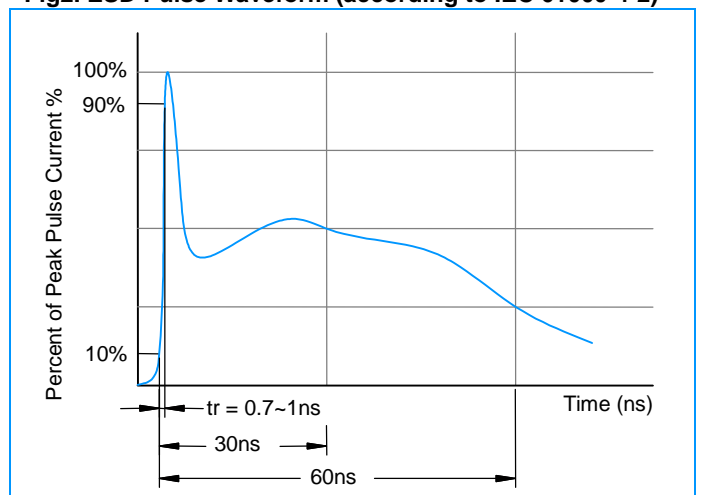

# Transient Voltage Suppressors for ESD Protection

## ESDXXV52D-C Series

### Characteristic Curves

Fig3. ESD Clamping (+8KV Contac per IEC61000-4-2)



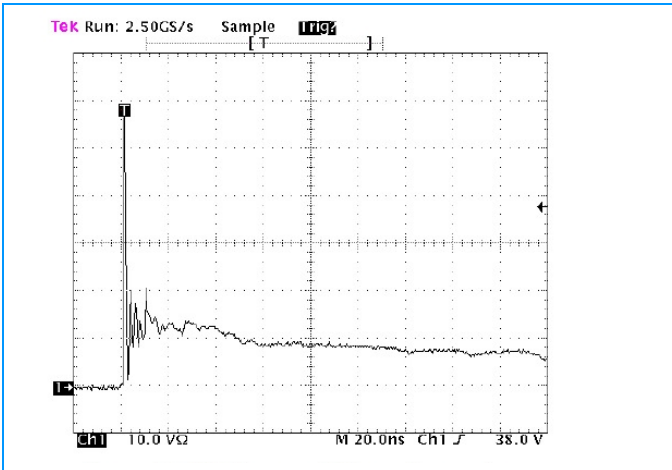


Fig4. ESD Clamping (-8KV Contac per IEC61000-4-2)

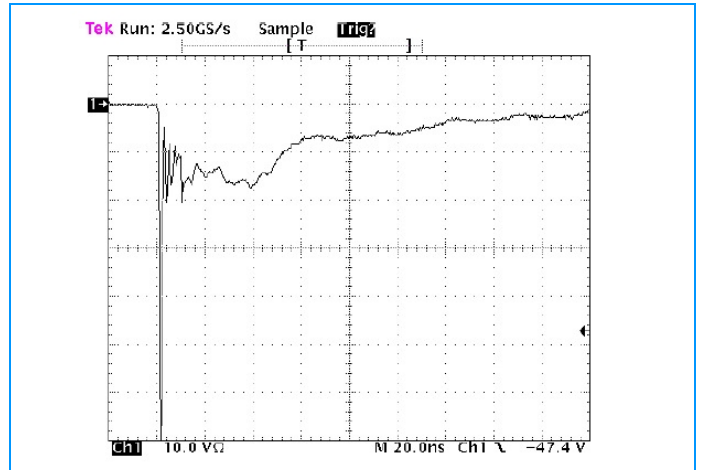


### SOD-523 Package Outline & Dimensions

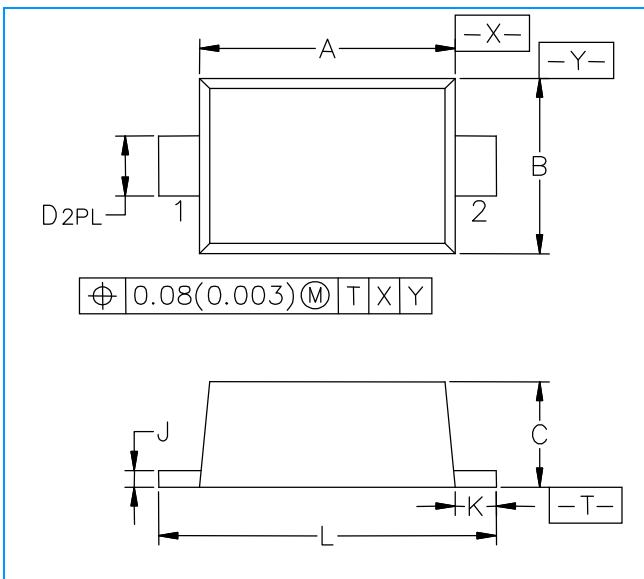

Symbol	Millimeters			Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	1.10	1.20	1.30	0.043	0.047	0.051
B	0.70	0.80	0.90	0.028	0.032	0.035
C	0.50	0.60	0.70	0.020	0.024	0.028
D	0.25	0.30	0.35	0.010	0.012	0.014
J	0.07	0.14	0.20	0.0028	0.0055	0.0079
K	0.15	0.20	0.25	0.006	0.008	0.010
S	1.50	1.60	1.70	0.059	0.063	0.067

### Soldering Footprint

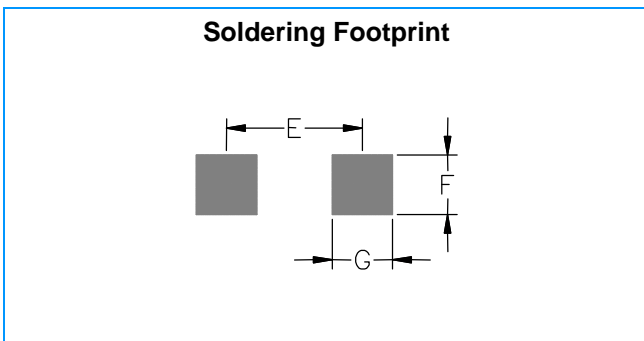

Symbol	Millimeters	Inches
E	1.40	0.0547
F	0.40	0.0157
G	0.40	0.0157