

RF AMPLIFIER

MODEL *TM3012*

Available as: TM3012, 4 Pin TO-8 (T4)
 TN3012, 4 Pin Surface Mount (SM3)
 FP3012, 4 Pin Flatpack (FP4)
 BX3012, Connectorized Housing (H1)

Features

- High Gain: 22 dB Typical
- Output Power: +14 dBm Typical
- Operating Temp. -55 °C to + 85 °C
- Screening to the Tables of MIL-STD-883 Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	200 - 450 MHz	200 - 450 MHz
Gain (dB)	22	21 Min.
Power @ 1 dB Comp. (dBm)	+14	+13.5 Min.
Reverse Isolation (dB)	-23	-22 Max.
VSWR In	<1.5:1	2.0:1 Max.
Out	<1.5:1	2.0:1 Max.
Noise Figure (dB)	3.2	4.0 Max.
Power Vdc	+12	+12
mA	33	35 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point.....+43 dBm (Typ.)
 Second Order Two Tone Intercept Point.....+36 dBm (Typ.)
 Third Order Two Tone Intercept Point.....+27 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 μsec Max.)

Typical Performance Data

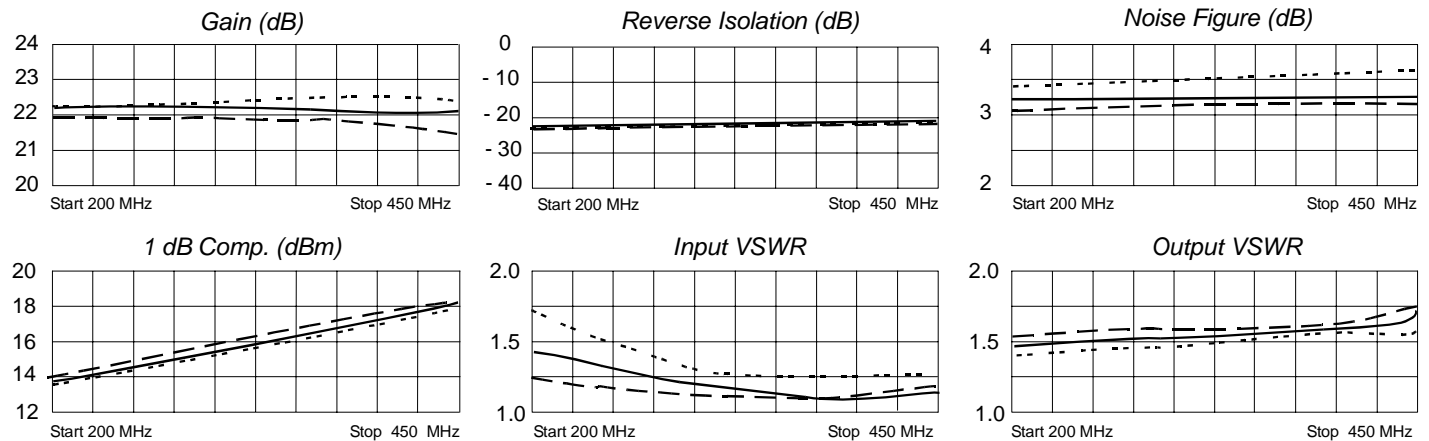

Legend ——— + 25 °C - - - - + 85 °C ······ -55 °C

Linear S-Parameters

Freq. MHz	---S11---		---S21---		---S12---		---S22---	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
200	.14	117	12.70	122	.0581	3	.11	95
250	.10	96	12.61	107	.0599	-0	.11	78
300	.07	91	12.50	92	.0631	-3	.11	62
350	.01	54	12.33	76	.0682	-5	.12	53
400	.07	-118	12.14	60	.0687	-9	.14	47
450	.14	-133	11.71	42	.0753	-13	.18	39

