


High Reliability Power Inductors ML483PYA

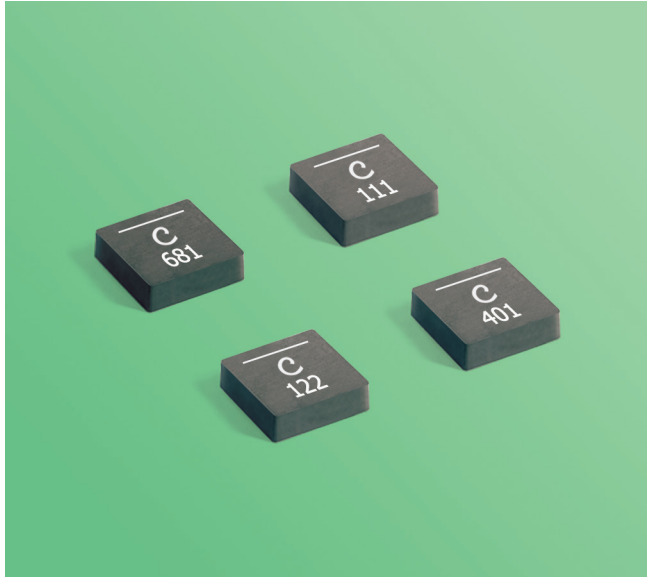

- High temperature materials allow operation in ambient temperatures up to 155°C
- Passes vibration testing to 80 G and shock testing to 1000 G
- Exceptionally low DCR – 1.6 mOhm
- Soft saturation makes them ideal for VRM/VRD applications.

Terminations Tin-silver (96.5/3.5) over copper.

Core material Composite

Weight 0.6 – 0.7 g

Ambient temperature –55°C to +105°C with Irms current, +105°C to +155°C with derated current

Storage temperature Component: –55°C to +155°C.
Tape and reel packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 500 per 7" reel
Plastic tape: 12 mm wide, 0.3 mm thick, 8 mm pocket spacing, 2.16 mm pocket depth

Part number ¹	Inductance ² ±20% (µH)	DCR (mOhms) ³		SRF (MHz) ⁴		Isat (A) ⁵	Irms (A) ⁶	
		typ	max	min	typ		20°C rise	40°C rise
ML483PYA111MLZ	0.11	1.60	1.85	148	185	45	15.8	20.3
ML483PYA151MLZ	0.15	2.35	2.70	132	165	43	15.0	19.5
ML483PYA301MLZ	0.30	3.45	3.85	82	103	35	14.3	18.8
ML483PYA401MLZ	0.40	4.60	5.05	67	84	26	12.8	16.5
ML483PYA561MLZ	0.56	6.45	7.10	54	68	21	11.3	13.9
ML483PYA681MLZ	0.68	6.80	7.50	47	59	21	9.8	12.8
ML483PYA821MLZ	0.82	9.75	10.75	42	53	19	8.6	11.4
ML483PYA102MLZ	1.0	11.60	12.80	40	50	17	7.5	9.0
ML483PYA122MLZ	1.2	13.50	14.90	35	44	16	6.4	7.5

1. When ordering, please specify **testing** code:

ML483PYA122MLZ

Testing: Z = COTS

H = Screening per Coilcraft CP-SA-10001

N = Screening per Coilcraft CP-SA-10004

2. Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc.

3. DCR measured on a micro-ohmmeter.

4. SRF measured using an Agilent/HP 4395A or equivalent.

5. Typical dc current at which the inductance drops 30% from its value without current.

6. Typical current that causes the specified temperature rise from 25°C ambient.

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.










Irms Testing

Irms testing was performed on a 0.060" thick pcb with 4 oz. copper traces optimized to minimize additional temperature rise.

Temperature rise is highly dependent on many factors including pcb land pattern, trace size, and proximity to other components. Therefore temperature rise should be verified in application conditions.

ML483PYA Series

L vs Current

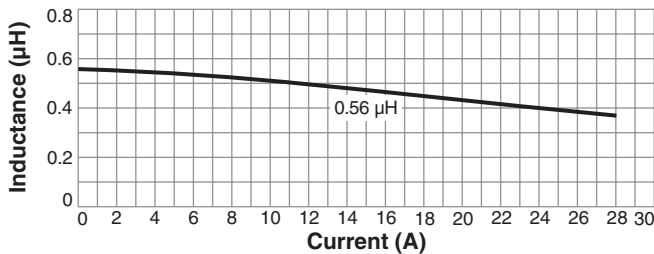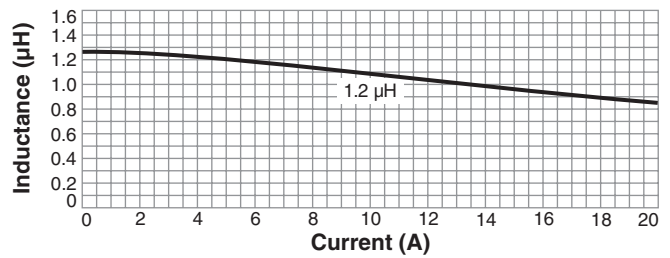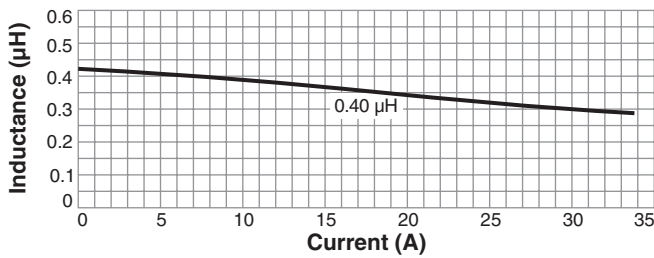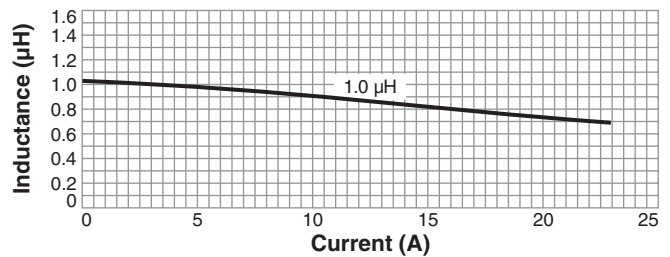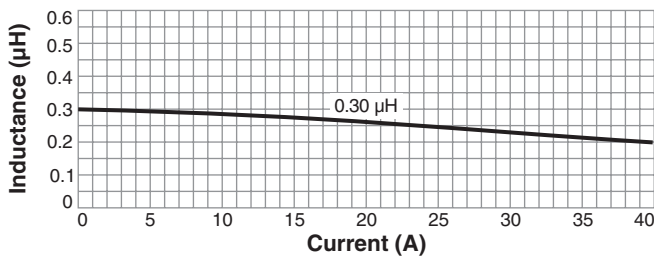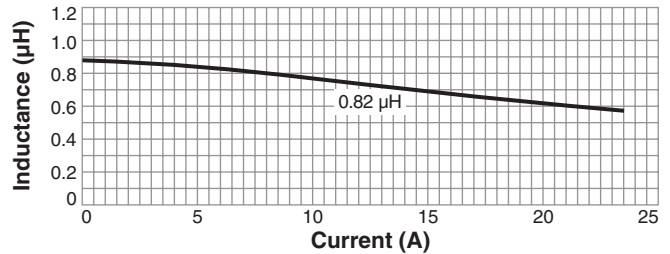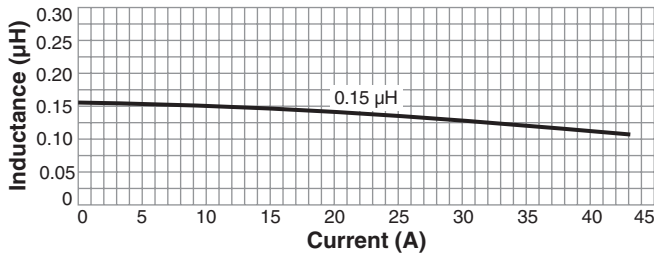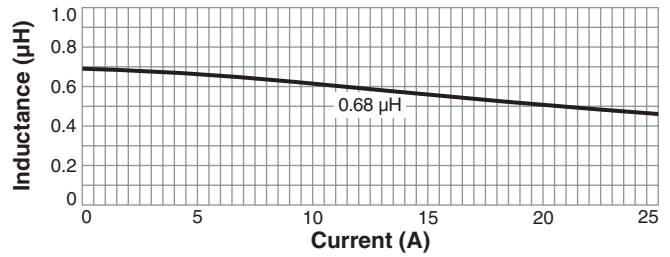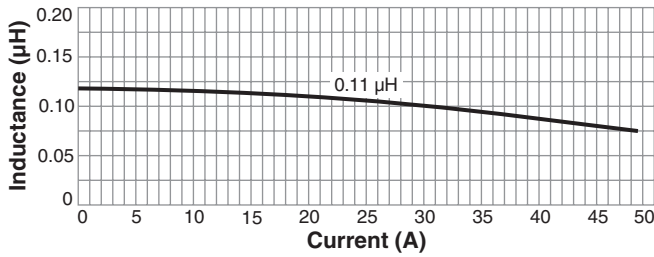

1102 Silver Lake Road
Cary, IL 60013
Phone 800-981-0363

© Coilcraft, Inc. 2012


Fax 847-639-1508
Email cps@coilcraft.com
www.coilcraft-cps.com

Document ML801-2 Revised 09/14/12



This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.

ML483PYA Series

L vs Frequency

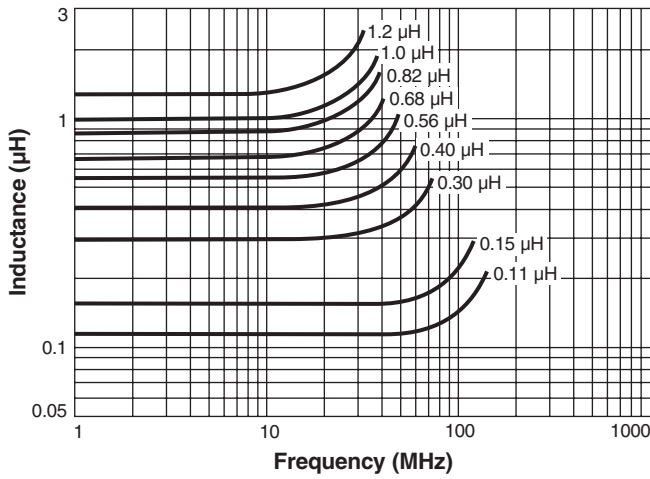


Irms Derating

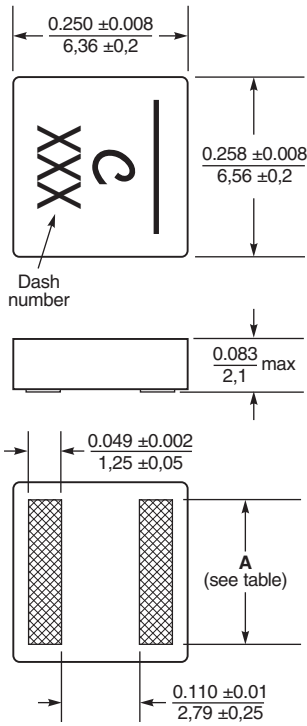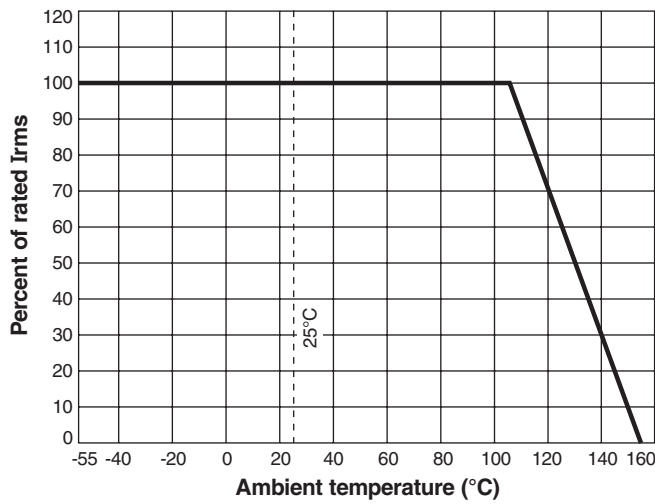

Dash number	A ±0.008 in ±0.20 mm (in / mm)	B (in / mm)
-111	0.213 / 5.42	0.224 / 5.69
-151	0.206 / 5.24	0.213 / 5.42
-301	0.206 / 5.24	0.213 / 5.42
-401	0.206 / 5.24	0.213 / 5.42
-561	0.201 / 5.12	0.206 / 5.24
-681	0.204 / 5.18	0.210 / 5.33
-821	0.200 / 5.08	0.204 / 5.18
-102	0.200 / 5.08	0.204 / 5.18
-122	0.200 / 5.08	0.204 / 5.18

Suggested Land Pattern



Dimensions are in $\frac{\text{inches}}{\text{mm}}$