



| Part Number | V_{RRM} (V) | $I_{FAV}@T_C$ (A) | $V_{FM}@I_{FM}$ 25°C (mV) | E_{AS} (mJ) | I_{AR} (A) | $I_{RM}@V_{RWM}$ 25°C (mA) | Max T_J (°C) | Fax on Demand Number | Case Outline Key |
|-------------|---------------|-------------------|---------------------------|---------------|--------------|----------------------------|----------------|----------------------|------------------|
|-------------|---------------|-------------------|---------------------------|---------------|--------------|----------------------------|----------------|----------------------|------------------|

Module

Center Tap

TO-244AB Isolated

| | | | | | | | | |
|-----------|-----|-------|-----|------|-----|----|------|-----|
| 201CMQ045 | 45 | 200.0 | 110 | 0.58 | 135 | 20 | 90 | 175 |
| 208CMQ060 | 60 | 200.0 | 95 | 0.75 | 75 | 1 | 480 | 150 |
| 203CMQ100 | 100 | 200.0 | 100 | 0.72 | 15 | 1 | 70 | 175 |
| 209CMQ150 | 150 | 200.0 | 97 | 0.8 | 32 | 1 | 50 | 175 |
| 220CMQ030 | 30 | 220.0 | 95 | 0.4 | 99 | 22 | 560 | 150 |
| 401CMQ045 | 45 | 400.0 | 120 | 0.56 | 270 | 40 | 180 | 175 |
| 408CMQ060 | 60 | 400.0 | 109 | 0.88 | 75 | 1 | 960 | 150 |
| 403CMQ100 | 100 | 400.0 | 85 | 0.72 | 15 | 1 | 140 | 175 |
| 440CMQ030 | 30 | 440.0 | 63 | 0.41 | 198 | 44 | 1120 | 150 |

K19

D61-6

| | | | | | | | | |
|----------|-----|------|-----|------|----|---|-----|-----|
| 62CNQ030 | 30 | 60.0 | 135 | 0.35 | 27 | 6 | 280 | 150 |
| 60CNQ035 | 35 | 60.0 | 116 | 0.44 | 40 | 6 | 200 | 150 |
| 61CNQ035 | 35 | 60.0 | 149 | 0.49 | 40 | 6 | 45 | 175 |
| 61CNQ040 | 40 | 60.0 | 149 | 0.49 | 40 | 6 | 45 | 175 |
| 60CNQ040 | 40 | 60.0 | 116 | 0.44 | 40 | 6 | 200 | 150 |
| 61CNQ045 | 45 | 60.0 | 149 | 0.49 | 40 | 6 | 45 | 175 |
| 60CNQ045 | 45 | 60.0 | 116 | 0.44 | 40 | 6 | 200 | 150 |
| 63CNQ080 | 80 | 60.0 | 155 | 0.64 | 15 | 1 | 35 | 175 |
| 63CNQ100 | 100 | 60.0 | 155 | 0.64 | 15 | 1 | 35 | 175 |

20269

K8

20195

20248

20248


20195

20248

20195

20223

20223

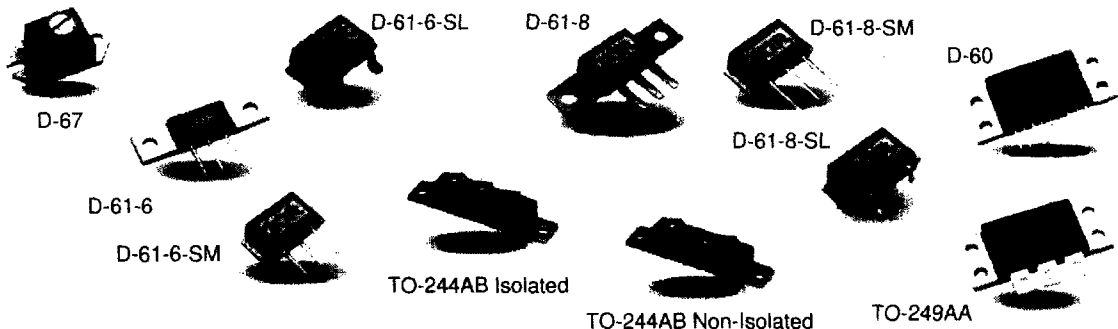

Illustrations not to scale

