





DELTA P/N : PCMB177T Series

Mechanical dimensions

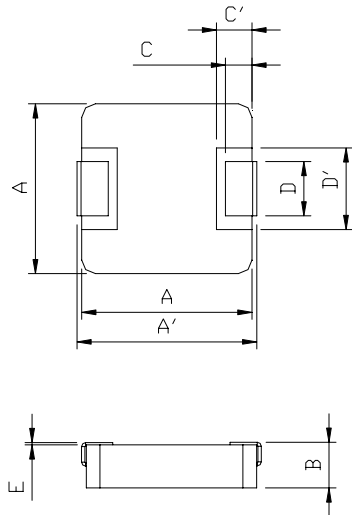

	Unit : mm
A'	17.15 ± 0.35
A	17.15 Max.
B	6.8 ± 0.2
C	2.5 ± 0.5
C'	3.5 ± 0.1
D	12.0 ± 0.3
D'	13.0 ± 0.5
E	0 ~ +0.3
F	12.8
G	11.2
H	18.2

Electrical Characteristics

Part No.	Lo @0A (uH) ± 20%	Ir(Adc)	Isat(Adc)	DCR (mΩ)	
				TYP.	MAX
PCMB177T-1R5MS	1.5	40.0	40.0	1.85	2.15
PCMB177T-2R2MS	2.2	37.0	34.0	2.15	2.5
PCMB177T-4R7MS	4.7	27.0	24.0	4.12	4.72
PCMB177T-6R8MS	6.8	20.0	22.0	6.55	7.55
PCMB177T-8R2MS	8.2	16.0	20.0	8.1	8.7
PCMB177T-100MS	10.0	14.0	18.0	9.3	10.0
PCMB177T-150MS	15.0	12.0	13.0	14.5	15.5
PCMB177T-200MS	20.0	9.7	12.0	19.5	21.9
PCMB177T-220MS	22.0	9.5	11.0	20.5	23.0
PCMB177T-330MS	33.0	9.0	10.0	35.1	37.0
PCMB177T-470MS	47.0	6.8	7.5	41.0	47.0
PCMB177T-680MS	68.0	5.2	6.5	74.0	85.0

NOTES:

- (1) All test data is referenced to 25°C ambient.
- (2) Ir is the DC current which cause the surface temperature of the part increase approximate 40°C
- (3) Isat is the DC current which cause the inductance drop approximate 30% of Lo.
- (4) Operating temperature range -55°C to 125°C. (The part temperature should be kepted under 125°C when the worse operating condition apply on it. Circuit design, component placement, PWB tracesize and thickness, airflow and other cooling provision may affect the part temperature. Part temperature should be verified in the end application.)
- (5) The rated current is depended on Ir and Isat which one is lower.