


5-208869 -1 Product Details

Live Product Chat US Only
8:30am - 5pm ET, Mon - Fri

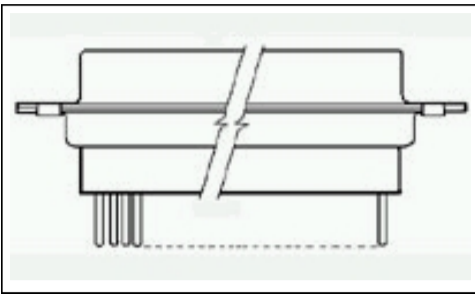

5-208869 -1

TE Part Number: 5 -208869 -1

[Active](#)

[Add to Part List](#)

Subminiature D Pin/Socket Connectors for MIL -C-24308 and MIL -C-39029

[Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- ? Connector
- ? Product Series = 90
- ? Density = High
- ? Terminate To Printed Circuit Board
- ? Number of Positions = 62

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? None Available

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? None Available

Instruction Sheets:

- ? None Available

CAD Files:

- ? None Available

Additional Information:

- ? [Product Line Information](#)

Additional Product Images:

- ? [Insert Arrangement](#)

Related Products:

- ? [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? [Product Type](#) = Connector
- ? [Product Series](#) = 90
- ? [Number of Positions](#) = 62
- ? [Gender](#) = Plug
- ? [PCB Mount Angle](#) = Vertical
- ? [Shell Size](#) = 4
- ? [Shell Material](#) = Steel
- ? Mounting Hole Diameter (mm [in]) = 3.05 [.120]
- ? Comment = Replacement pin contact Part Number 207683 -8.

Termination Related Features:

- ? [Termination \(Solder\) Post Length \(mm \[in\]\)](#) = 6.99 [0.275]

Body Related Features:

- ? [Blindmate](#) = No
- ? [Non-Magnetic](#) = No
- ? [Pins](#) = With
- ? [Rear Grommet](#) = No
- ? [Power/Signal/Coax Combination](#) = No
- ? [Shell Plating](#) = Zinc
- ? Mount Style = Mounting Holes
- ? Retention Clip Material = Stainless Steel

Contact Related Features:

- ? [Contact Size](#) = 22
- ? [Contact Style](#) = Posted

Configuration Related Features:

- ? [Density](#) = High

Industry Standards:

- ? Government/Industry Qualification = No
- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C, Reflow solder capable to 245°C, Reflow solder capable to 260°C, Pin -in-Paste capable to 245°C, Pin in-Paste capable to 260°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant
- ? NASA Qualification = No

Conditions for Usage:

- ? Terminate To = Printed Circuit Board

Other:

- ? Brand = AMP