


# General Purpose NPN Epitaxial Planar Transistor

## BTC2880M3


### Features

- High breakdown voltage,  $BV_{CEO} \geq 120V$
- Large continuous collector current capability
- Low collector saturation voltage
- Pb-free package

### Symbol

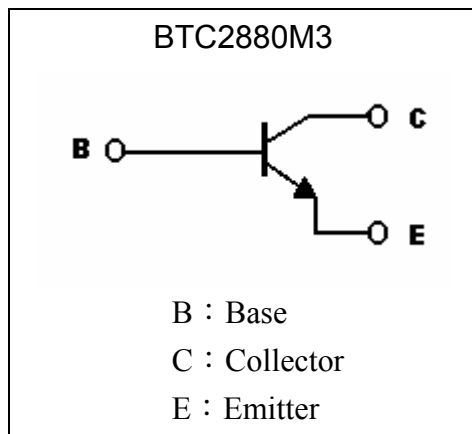


### Outline

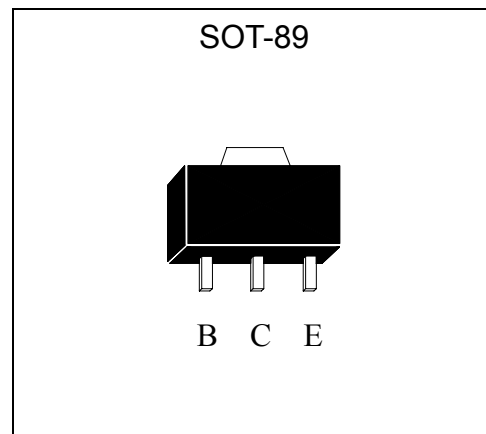

### Ordering Information

Device	Package	Shipping
BTC2880M3-X-T2-G	SOT-89 (Pb-free lead plating and halogen-free package)	1000 pcs / Tape & Reel

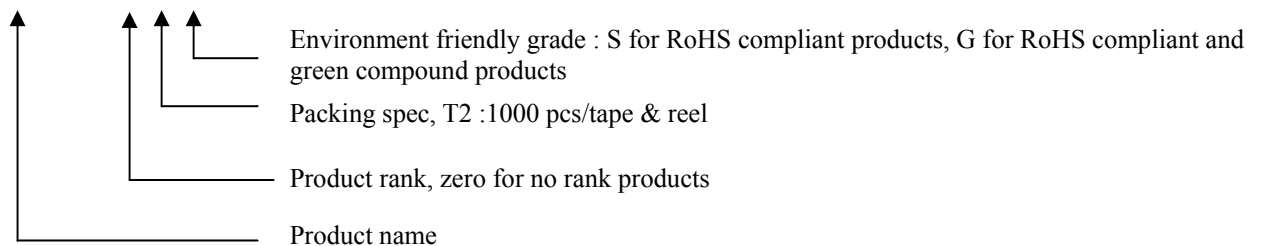



**Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Limits	Unit
Collector-Base Voltage	V <sub>CB0</sub>	180	V
Collector-Emitter Voltage	V <sub>CEO</sub>	120	V
Emitter-Base Voltage	V <sub>EBO</sub>	7	V
Collector Current	I <sub>C</sub>	1	A
Base Current	I <sub>B</sub>	2	A
Power Dissipation	Pd	0.6	W
		1 (Note 1)	W
		2 (Note 2)	W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-55~+150	°C

Note : 1. When mounted on FR-4 PCB with area measuring 10×10×1 mm  
 2 . When mounted on ceramic with area measuring 40×40×1 mm

**Characteristics (Ta=25°C)**






Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BV <sub>CB0</sub>	180	-	-	V	I <sub>C</sub> =50μA
BV <sub>CEO</sub>	120	-	-	V	I <sub>C</sub> =1mA
BV <sub>EBO</sub>	7	-	-	V	I <sub>E</sub> =50μA
I <sub>CB0</sub>	-	-	100	nA	V <sub>CB</sub> =180V
I <sub>EBO</sub>	-	-	100	nA	V <sub>EB</sub> =6V
*V <sub>CE(sat)</sub>	-	0.1	0.2	V	I <sub>C</sub> =500mA, I <sub>B</sub> =50mA
*V <sub>CE(sat)</sub>	-	0.2	0.5	V	I <sub>C</sub> =1A, I <sub>B</sub> =50mA
*V <sub>BE(sat)</sub>	-	-	1	V	I <sub>C</sub> =500mA, I <sub>B</sub> =50mA
*V <sub>BE(on)</sub>	-	-	0.9	V	V <sub>CE</sub> =5V, I <sub>C</sub> =500mA
*h <sub>FE 1</sub>	100	-	-	-	V <sub>CE</sub> =5V, I <sub>C</sub> =50mA
*h <sub>FE 2</sub>	100	-	270	-	V <sub>CE</sub> =5V, I <sub>C</sub> =100mA
*h <sub>FE 3</sub>	80	-	-	-	V <sub>CE</sub> =5V, I <sub>C</sub> =800mA
f <sub>T</sub>	50	-	-	MHz	V <sub>CE</sub> =10V, I <sub>C</sub> =50mA, f=100MHz
C <sub>ob</sub>	-	-	20	pF	V <sub>CB</sub> =10V, I <sub>E</sub> =0A, f=1MHz

\*Pulse Test: Pulse Width ≤380μs, Duty Cycle ≤2%


**Classification Of hFE 2**

Rank	P	Q
Range	100~200	120~270


**Characteristic Curves**

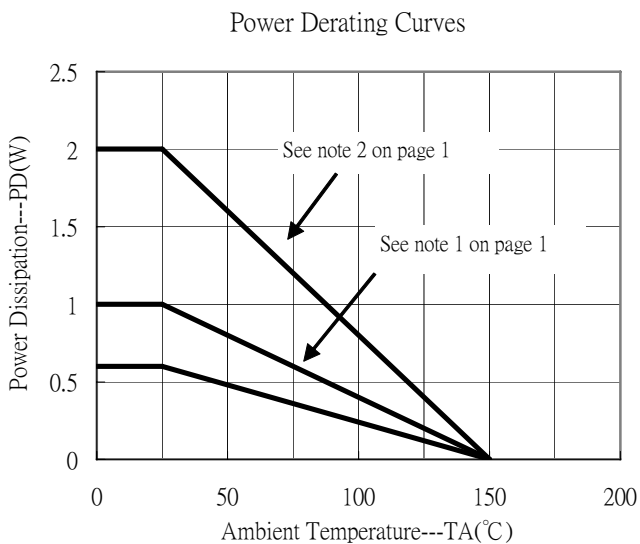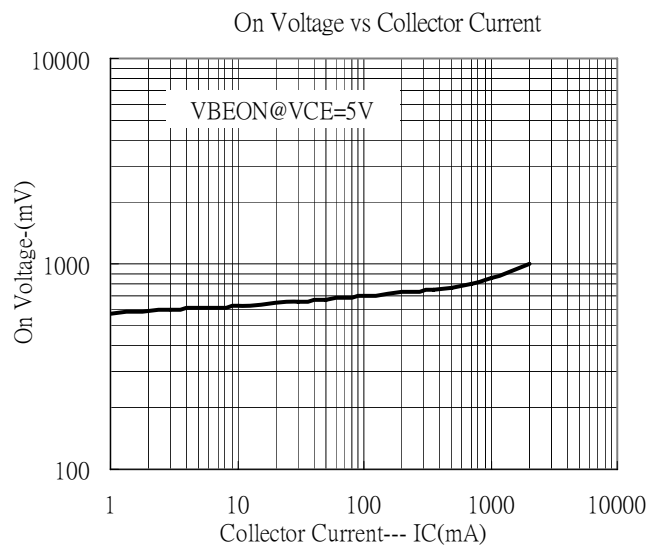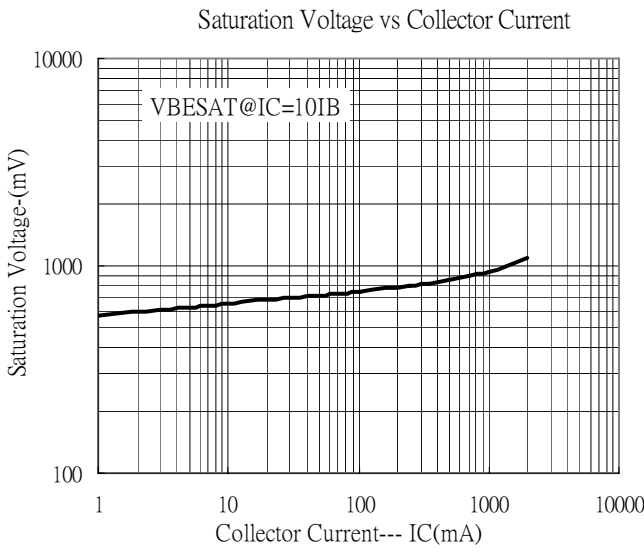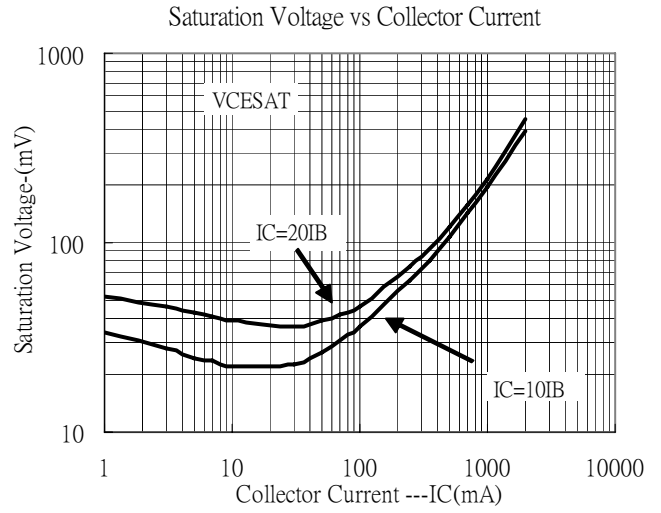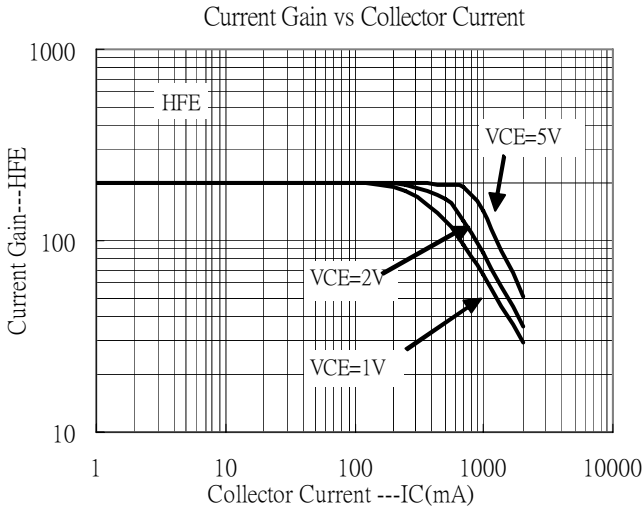

**Reel Dimension**

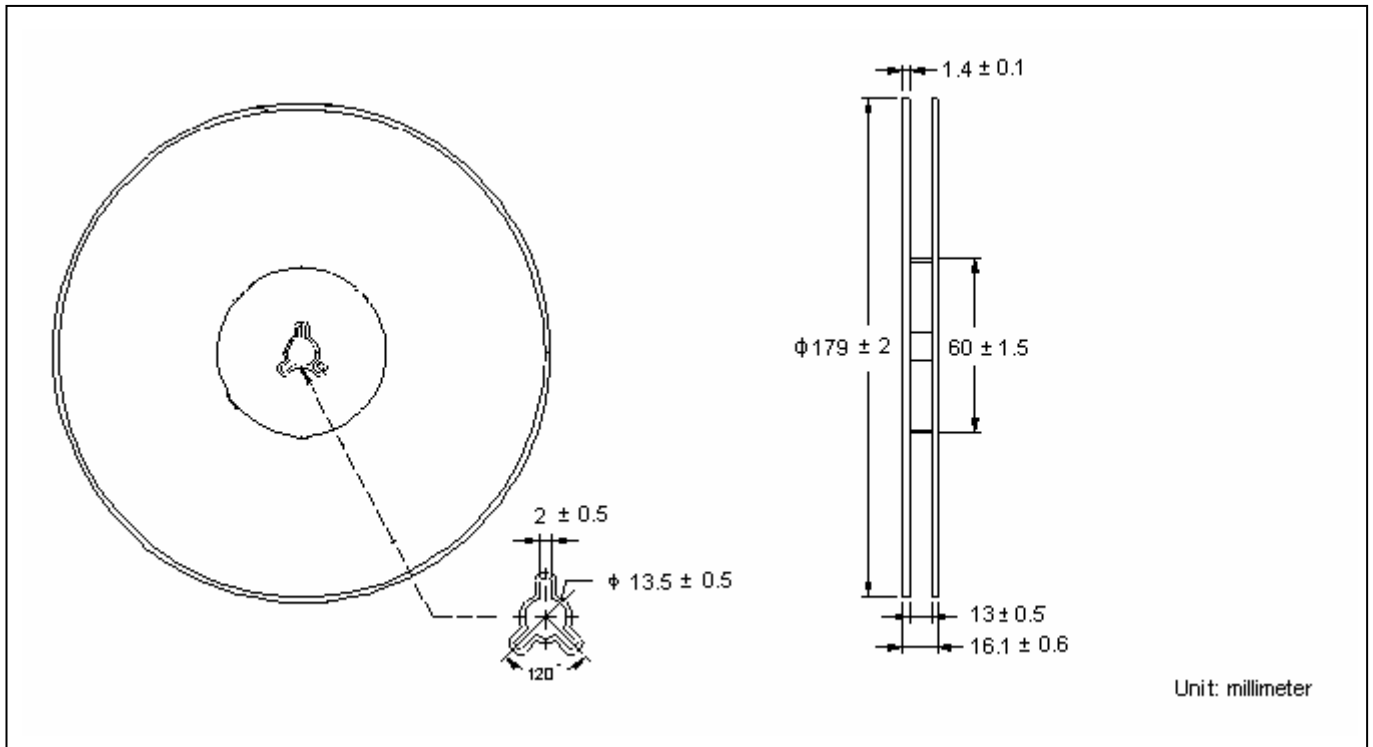


**Carrier Tape Dimension**

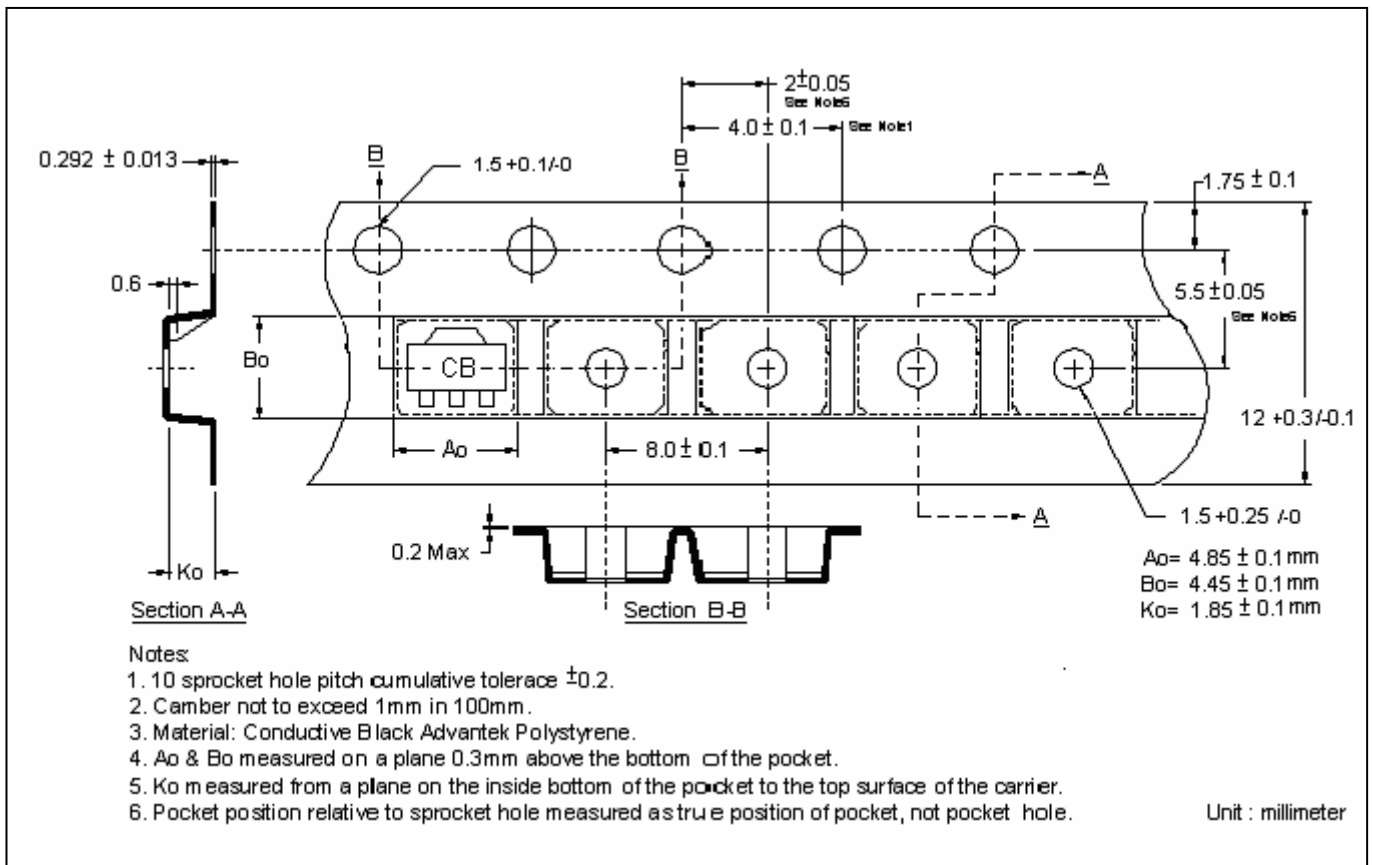

**Recommended wave soldering condition**

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds


**Recommended temperature profile for IR reflow**

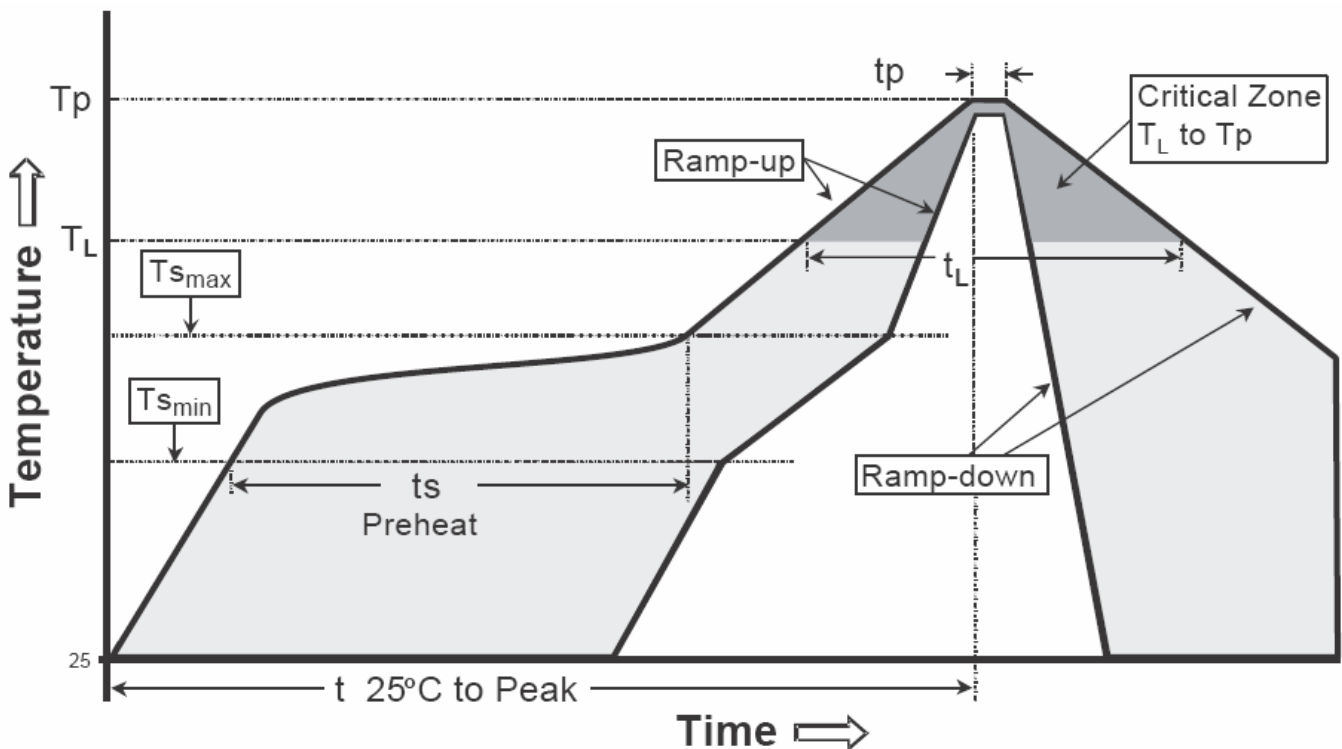

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (T <sub>smax</sub> to T <sub>p</sub> )	3°C/second max.	3°C/second max.
Preheat		
-Temperature Min(T <sub>s min</sub> )	100°C	150°C
-Temperature Max(T <sub>s max</sub> )	150°C	200°C
-Time(t <sub>s min</sub> to t <sub>s max</sub> )	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (T <sub>L</sub> )	183°C	217°C
- Time (t <sub>L</sub> )	60-150 seconds	60-150 seconds
Peak Temperature(T <sub>p</sub> )	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

**SOT-89 Dimension**

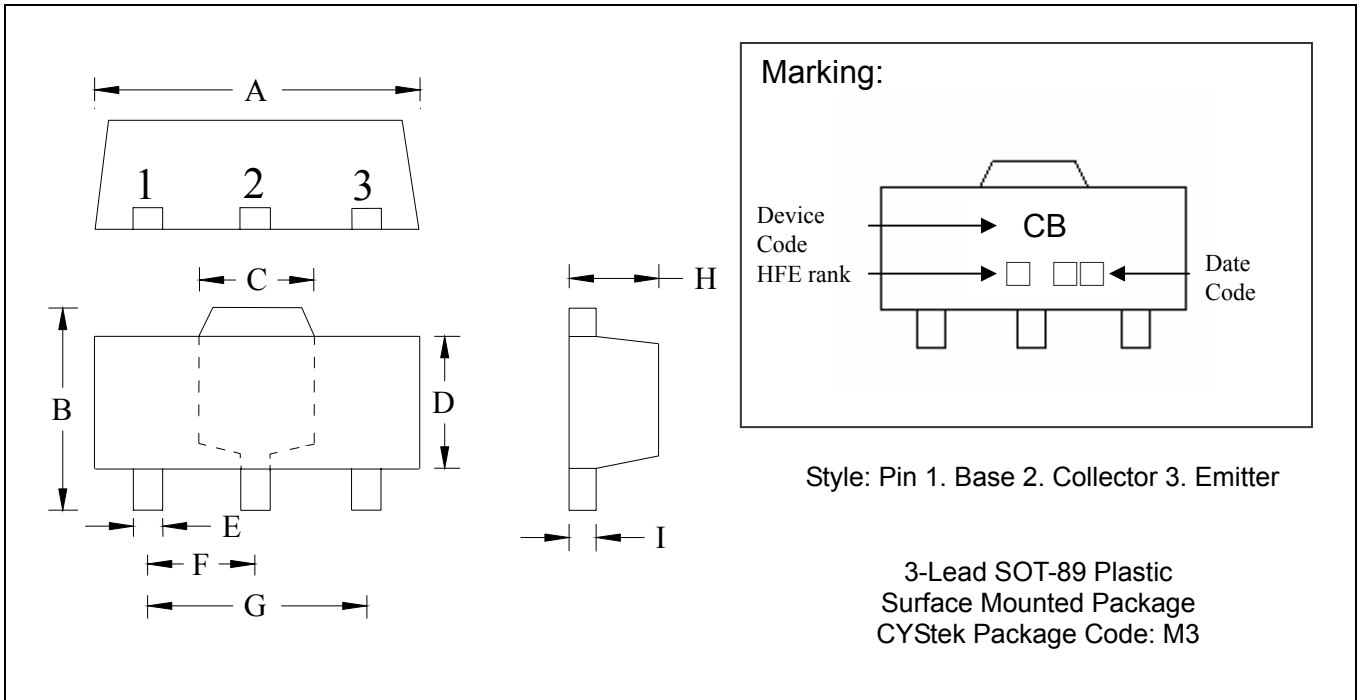

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.1732	0.1811	4.40	4.60	F	0.0591	TYP	1.50	TYP
B	0.1551	0.1673	3.94	4.25	G	0.1181	TYP	3.00	TYP
C	0.0610	REF	1.55	REF	H	0.0551	0.0630	1.40	1.60
D	0.0906	0.1024	2.30	2.60	I	0.0138	0.0173	0.35	0.44
E	0.0126	0.0205	0.32	0.52					

**Notes:** 1.Controlling dimension: millimeters.  
 2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.  
 3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

**Material:**

- Lead: Pure tin plated.
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0.

**Important Notice:**

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.