

Inductors, Commercial, Molded, Shielded, Axial Leaded



ELECTRICAL SPECIFICATIONS

- Inductance Tolerance:** $\pm 10\%$ standard, $\pm 5\%$ available
- Insulation Resistance:** 1000 M Ω minimum per MIL-STD-202, method 302, test condition B
- Dielectric Withstanding Voltage:** 1000 V_{AC} per MIL-STD-202, method 301 (at sea level)
- Percent Coupling:** 3 % maximum per MIL-PRF-15305
- Operating Temperature:** - 55 °C to + 105 °C

ENVIRONMENTAL PERFORMANCE		
TEST	CONDITIONS	SPECIFICATIONS
Barometric Pressure	C	MIL-STD-202, meth. 105
Thermal Shock	A-1	MIL-STD-202, meth. 107
Flammability	-	MIL-STD-202, meth. 111
Overload	-	MIL-PRF-15305
Low Temperature Storage	-	MIL-PRF-15305
Resistance to Soldering Heat	A	MIL-STD-202, meth. 210
Resistance to Solvents	-	MIL-STD-202, meth. 215

FEATURES

- Wide inductance range in small package
- Flame retardant coating
- Electromagnetic shield-finest shield available
- Precision performance, excellent reliability, sturdy construction
- Epoxy molded construction provides superior moisture protection
- Compliant to RoHS directive 2002/95/EC


RoHS
COMPLIANT

MECHANICAL SPECIFICATIONS

Terminals: 5 lb pull per MIL-STD-202, method 211, test condition A

Weight: IMS-5 = 0.85 g maximum


MATERIAL SPECIFICATIONS

Encapsulant: Epoxy

Standard Terminals: #22 AWG, tinned copper

INDUCTANCE RANGE AND MILITARY STANDARD			
INDUCTANCE RANGE (μ H)		MATERIAL	
MIN.	MAX.	CORE	SHIELD
0.10	0.82	Phenolic	Powdered iron
1.0	12	Powdered iron	Powdered iron
15	8200	Ferrite	Ferrite

DIMENSIONS in inches [millimeters]

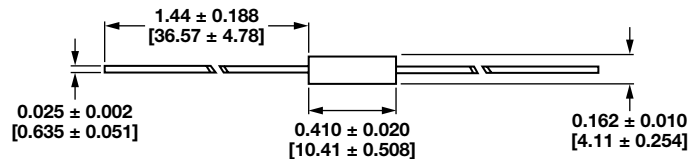

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	IND. (μ H)	TOL. (%)	Q MIN.	TEST FREQUENCY L AND Q (MHz)	SRF MIN. (MHz) ⁽¹⁾	DCR MAX. (Ω)	RATED DC CURRENT (mA) ⁽²⁾	INCREMENTAL CURRENT (mA) ⁽³⁾
IMS-5	0.10	± 10	50	25.0	250.0	0.025	1790	-
IMS-5	0.12	± 10	51	25.0	250.0	0.034	1530	-
IMS-5	0.15	± 10	51	25.0	250.0	0.037	1470	-
IMS-5	0.18	± 10	50	25.0	250.0	0.047	1300	-
IMS-5	0.22	± 10	49	25.0	250.0	0.067	1100	-
IMS-5	0.27	± 10	47	25.0	250.0	0.11	855	-
IMS-5	0.33	± 10	46	25.0	250.0	0.13	780	-
IMS-5	0.39	± 10	44	25.0	250.0	0.18	670	-
IMS-5	0.47	± 10	44	25.0	235.0	0.25	565	-
IMS-5	0.56	± 10	43	25.0	210.0	0.33	490	-
IMS-5	0.68	± 10	42	25.0	190.0	0.45	420	-
IMS-5	0.82	± 10	40	25.0	180.0	0.59	370	-

Notes

⁽¹⁾ Measured with full length lead

⁽²⁾ **Rated DC Current:** Based on maximum temperature rise not to exceed 15 °C at + 90 °C ambient

⁽³⁾ **Incremental Current:** The minimum typical current at which the inductance will be decreased by 5 % from its initial zero DC value

STANDARD ELECTRICAL SPECIFICATIONS								
MODEL	IND. (μH)	TOL. (%)	Q MIN.	TEST FREQUENCY L AND Q (MHz)	SRF MIN. (MHz) ⁽¹⁾	DCR MAX. (Ω)	RATED DC CURRENT (mA) ⁽²⁾	INCREMENTAL CURRENT (mA) ⁽³⁾
IMS-5	1.0	± 10	44	25.0	140.0	0.07	1070	-
IMS-5	1.2	± 10	44	7.9	130.0	0.10	895	-
IMS-5	1.5	± 10	44	7.9	115.0	0.12	815	-
IMS-5	1.8	± 10	44	7.9	105.0	0.14	775	-
IMS-5	2.2	± 10	44	7.9	100.0	0.19	650	-
IMS-5	2.7	± 10	44	7.9	92.0	0.28	535	-
IMS-5	3.3	± 10	44	7.9	85.0	0.35	480	-
IMS-5	3.9	± 10	44	7.9	75.0	0.40	450	-
IMS-5	4.7	± 10	44	7.9	70.0	0.55	380	-
IMS-5	5.6	± 10	44	7.9	65.0	0.72	335	-
IMS-5	6.8	± 10	50	7.9	55.0	1.02	280	-
IMS-5	8.2	± 10	50	7.9	50.0	1.32	250	-
IMS-5	10	± 10	50	7.9	46.0	1.62	220	-
IMS-5	12	± 10	55	2.5	44.0	2.00	200	-
IMS-5	15	± 10	45	2.5	49.0	0.80	315	250.0
IMS-5	18	± 10	45	2.5	45.0	0.89	300	235.0
IMS-5	22	± 10	45	2.5	41.0	0.96	290	220.0
IMS-5	27	± 10	45	2.5	38.0	1.19	260	200.0
IMS-5	33	± 10	45	2.5	34.0	1.37	240	190.0
IMS-5	39	± 10	50	2.5	29.0	1.93	205	180.0
IMS-5	47	± 10	50	2.5	27.0	2.11	195	175.0
IMS-5	56	± 10	50	2.5	25.0	2.23	190	160.0
IMS-5	68	± 10	50	2.5	21.0	2.70	170	150.0
IMS-5	82	± 10	50	2.5	10.5	2.44	180	140.0
IMS-5	100	± 10	50	2.5	10.0	3.12	160	120.0
IMS-5	120	± 10	55	0.79	9.7	3.6	150	95.0
IMS-5	150	± 10	55	0.79	8.5	4.1	140	90.0
IMS-5	180	± 10	55	0.79	8.0	4.4	135	85.0
IMS-5	220	± 10	55	0.79	7.5	5.0	125	80.0
IMS-5	270	± 10	55	0.79	7.0	5.8	115	70.0
IMS-5	330	± 10	55	0.79	6.5	6.4	110	65.0
IMS-5	390	± 10	60	0.79	6.2	7.4	105	60.0
IMS-5	470	± 10	60	0.79	5.7	9.5	92	58.0
IMS-5	560	± 10	60	0.79	4.7	10.5	90	55.0
IMS-5	680	± 10	60	0.79	4.5	11.8	80	50.0
IMS-5	820	± 10	60	0.79	4.2	13.0	80	45.0
IMS-5	1000	± 10	60	0.79	3.8	17.5	70	40.0
IMS-5	1200	± 10	45	0.25	1.5	22.1	60	35.0
IMS-5	1500	± 10	45	0.25	1.2	26.5	55	33.0
IMS-5	1800	± 10	45	0.25	1.0	29.9	50	30.0
IMS-5	2200	± 10	45	0.25	0.97	33.8	50	27.0
IMS-5	2700	± 10	45	0.25	0.92	47.3	40	25.0
IMS-5	3300	± 10	45	0.25	0.84	53.0	40	22.0
IMS-5	3900	± 10	45	0.25	0.80	73.8	35	20.0
IMS-5	4700	± 10	45	0.25	0.74	81.6	31	19.0
IMS-5	5600	± 10	44	0.25	0.73	98.9	28	17.0
IMS-5	6800	± 10	40	0.25	0.66	111.0	27	16.0
IMS-5	8200	± 10	40	0.25	0.54	119.0	26	15.0

Notes

- (1) Measured with full length lead
- (2) **Rated DC Current:** Based on maximum temperature rise not to exceed 15 °C at + 90 °C ambient
- (3) **Incremental Current:** The minimum typical current at which the inductance will be decreased by 5 % from its initial zero DC value

ORDERING INFORMATION				
IMS-5	10 μH	± 10 %	ER	e2
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER			
I	M	S	0 5
MODEL			
E	R		
PACKAGE CODE			
1	0	0	
INDUCTANCE VALUE			
		K	
			INDUCTANCE TOLERANCE



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Leaded Magnetics Packaging Methods

TAPE AND REEL in inches [millimeters]											
Reel Pack											
MODEL	PREVIOUS CODE*	GLOBAL CODE LEAD BEARING	GLOBAL CODE LEAD (Pb)-FREE	REEL SIZE	CARRIER TAPE WIDTH (W)	COMPONENT PITCH (P)	UNITS/ REEL	PREVIOUS CODE*	GLOBAL CODE LEAD BEARING	GLOBAL CODE LEAD (Pb)-FREE	UNITS/ BULK
IM-1	R36	RU	ER	12	2.06 [52.39]	0.2 [5.08]	4000	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.06 [52.39]	0.2 [5.08]	400				
	RJ4	ST	EV	7.5	2.06 [52.39]	0.2 [5.08]	1000				
IM-2	R36	RU	ER	12	2.06 [52.39]	0.2 [5.08]	4000	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.06 [52.39]	0.2 [5.08]	400				
	RJ4	ST	EV	7.5	2.06 [52.39]	0.2 [5.08]	1000				
IM-4	R36	RU	ER	12	2.06 [52.39]	0.2 [5.08]	2500	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.06 [52.39]	0.2 [5.08]	400				
	RJ4	ST	EV	7.5	2.06 [52.39]	0.2 [5.08]	1000				
IM-6	R36	RU	ER	12	2.06 [52.39]	0.4 [10.16]	2000	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.06 [52.39]	0.4 [10.16]	400				
IM-8	RB5	RA	EZ	12	2.06 [52.39]	0.4 [10.16]	1000	B08	BH	EB	100
	RJ2	SJ	ET	7.5	2.06 [52.39]	0.4 [10.16]	400				
IM-9	RB5	RA	EZ	12	2.06 [52.39]	0.4 [10.16]	800	B08	BH	EB	80
	RJ2	SJ	ET	7.5	2.06 [52.39]	0.4 [10.16]	400				
	RJ5	SS	EW	12	2.06 [52.39]	0.4 [10.16]	1000				
IM-10	RB5	RA	EZ	12	2.06 [52.39]	0.4 [10.16]	800	B08	BH	EB	70
	RJ2	SJ	ET	7.5	2.06 [52.39]	0.4 [10.16]	400				
IM-6-38	RB5	RA	EZ	12	2.06 [52.39]	0.4 [10.16]	1000	B08	BH	EB	200
	RJ2	SJ	ET	7.5	2.06 [52.39]	0.4 [10.16]	400				
IM-6RFCS-40	R36	RU	ER	12	2.06 [52.39]	0.4 [10.16]	1000	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.06 [52.39]	0.4 [10.16]	400				
IM-10-22	RB5	RR	EZ	12	2.06 [52.39]	0.4 [10.16]	800	B08	BH	EB	100
IM-10-28	R07	NA	EY	12	2.88 [73.15]	0.4 [10.16]	250	B08	BH	EB	70
IM-10-31	-	-	-	-	-	-	-	B08	BH	EB	50
IM-10-37	RB5	RA	EZ	12	2.06 [52.39]	0.4 [10.16]	500	B08	BH	EB	40
IM-10-46	-	-	-	-	-	-	-	B08	BH	EB	25
IM-10RFCL-12	RB5	RA	EZ	12	2.19 [55.63]	0.4 [10.16]	250	B08	BH	EB	50
IMS-2WWD-40	R36	RU	ER	12	2.06 [52.39]	0.2 [5.08]	4000	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.06 [52.39]	0.2 [5.08]	400				
	RJ4	ST	EV	7.5	2.06 [52.39]	0.2 [5.08]	1000				
IMS-2SWWD-30	R36	RU	ER	12	2.06 [52.39]	0.2 [5.08]	4000	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.06 [52.39]	0.2 [5.08]	400				
	RJ4	ST	EV	7.5	2.06 [52.39]	0.2 [5.08]	1000				

Packaging Methods



Vishay Dale

Leaded Magnetics Packaging Methods

TAPE AND REEL in inches [millimeters]											
MODEL	PREVIOUS CODE*	GLOBAL CODE LEAD BEARING	GLOBAL CODE LEAD (Pb)-FREE	REEL SIZE	CARRIER TAPE WIDTH (W)	COMPONENT PITCH (P)	UNITS/ REEL	PREVIOUS CODE*	GLOBAL CODE LEAD BEARING	GLOBAL CODE LEAD (Pb)-FREE	UNITS/ BULK
IMS-2	R36	RU	ER	12	2.06 [52.39]	0.2 [5.08]	4000	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.06 [52.39]	0.2 [5.08]	400				
	RJ4	ST	EV	7.5	2.06 [52.39]	0.2 [5.08]	1000				
IMS-5	R36	RU	ER	12	2.50 [63.50]	0.2 [5.08]	2500	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.50 [63.50]	0.2 [5.08]	400				
	RJ4	ST	EV	7.5	2.50 [63.50]	0.2 [5.08]	1000				
IMS-5WD-40	R36	RU	ER	12	2.50 [63.50]	0.2 [5.08]	2500	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.50 [63.50]	0.2 [5.08]	400				
	RJ4	ST	EV	7.5	2.50 [63.50]	0.2 [5.08]	1000				
IMS-5SWD-65	R36	RU	ER	12	2.50 [63.50]	0.2 [5.08]	2500	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.50 [63.50]	0.2 [5.08]	400				
	RJ4	ST	EV	7.5	2.50 [63.50]	0.2 [5.08]	1000				
IR-2	R36	RU	ER	12	2.06 [52.39]	0.2 [5.08]	4000	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.06 [52.39]	0.2 [5.08]	400				
	RJ4	ST	EV	12	2.06 [52.39]	0.2 [5.08]	1000				
IR-4	R36	RU	ER	12	2.06 [52.39]	0.2 [5.08]	2500	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.06 [52.39]	0.2 [5.08]	400				
	RJ4	ST	EV	7.5	2.06 [52.39]	0.2 [5.08]	1000				
IRF-1	R36	RU	ER	12	2.06 [52.39]	0.2 [5.08]	4000	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.06 [52.39]	0.2 [5.08]	400				
	RJ4	ST	EV	7.5	2.06 [52.39]	0.2 [5.08]	1000				
IRF-3	R36	RU	ER	12	2.06 [52.39]	0.2 [5.08]	2500	B08	BH	EB	200
	RJ1	SH	ES	7.5	2.06 [52.39]	0.2 [5.08]	400				
	RJ4	ST	EV	7.5	2.06 [52.39]	0.2 [5.08]	1000				
IRF-24	-	-	ER	12	2.06 [52.39]	0.2 [5.08]	5000	-	-	-	-
IRF-36	-	-	ER	12	2.06 [52.39]	0.2 [5.08]	5000	-	-	-	-
IRF-46	-	-	ER	12	2.06 [52.39]	0.2 [5.08]	3000	-	-	-	-
IHD-1	R16	RR	ER	12	2.06 [52.39]	0.4 [10.16]	800	B08	BH	EB	50
IHD-3	RA3	AC	ER	12	2.87 [72.90]	0.6 [15.24]	200	B08	BH	EB	190
IHD-2	-	-	-	-	-	-	-	-	-	EB	150
IHD-4	-	-	-	-	-	-	-	-	-	EB	60
IHA-101	-	-	-	-	-	-	-	B01	BA	EB	210
IHA-102	-	-	-	-	-	-	-	B01	BA	EB	210
IHA-103	-	-	-	-	-	-	-	B01	BA	EB	200
IHA-104	-	-	-	-	-	-	-	B01	BA	EB	160
IHA-105	-	-	-	-	-	-	-	B01	BA	EB	160
IHA-201	-	-	-	-	-	-	-	B01	BA	EB	200
IHA-202	-	-	-	-	-	-	-	B01	BA	EB	180
IHA-203	-	-	-	-	-	-	-	B01	BA	EB	160
IHA-204	-	-	-	-	-	-	-	B01	BA	EB	120
IHA-205	-	-	-	-	-	-	-	B01	BA	EB	75
IHA-301	-	-	-	-	-	-	-	B01	BA	EB	210
IHA-302	-	-	-	-	-	-	-	B01	BA	EB	240
IHA-303	-	-	-	-	-	-	-	B01	BA	EB	160
IHA-304	-	-	-	-	-	-	-	B01	BA	EB	160




TAPE AND REEL in inches [millimeters]											
MODEL	PREVIOUS CODE*	GLOBAL CODE LEAD BEARING	GLOBAL CODE LEAD (Pb)-FREE	REEL SIZE	CARRIER TAPE WIDTH (W)	COMPONENT PITCH (P)	UNITS/ REEL	PREVIOUS CODE*	GLOBAL CODE LEAD BEARING	GLOBAL CODE LEAD (Pb)-FREE	UNITS/ BULK
IHA-305	-	-		-	-	-	-	B01	BA	EB	160
IHA-501	-	-		-	-	-	-	B01	BA	EB	210
IHA-502	-	-		-	-	-	-	B01	BA	EB	200
IHA-503	-	-		-	-	-	-	B01	BA	EB	75
IHA-504	-	-		-	-	-	-	B01	BA	EB	75
IHA-505	-	-		-	-	-	-	B01	BA	EB	75
IHTH-0750	-	-		-	-	-	-	-	-	EB	25
IHTH-1125	-	-		-	-	-	-	-	-	EB	15
IH-3 5, 27, 50 & 100 μ H	-	-		-	-	-	-	B15	BQ	EB	150
IH-3 10 μ H	-	-		-	-	-	-	B15	BQ	EB	200
IH-3 150 μ H	-	-		-	-	-	-	B15	BQ	EB	50
IH-3 250 μ H	-	-		-	-	-	-	B15	BQ	EB	75
IH-4 0 μ H	-	-		-	-	-	-	B15	BQ	EB	160
IH-5 5 & 10 μ H	-	-		-	-	-	-	B15	BQ	EB	200
IH-5 27 μ H	-	-		-	-	-	-	B15	BQ	EB	150
IH-5 50, 68, 100 & 150 μ H	-	-		-	-	-	-	B15	BQ	EB	50
IH-10 5 & 10 μ H	-	-		-	-	-	-	B15	BQ	EB	150
IH-10 27 μ H	-	-		-	-	-	-	B15	BQ	EB	50
IH-10 50, 68 & 100 μ H	-	-		-	-	-	-	B15	BQ	EB	75
IH-15 5 μ H	-	-		-	-	-	-	B15	BQ	EB	50
IH-15 10 & 27 μ H	-	-		-	-	-	-	B15	BQ	EB	75
IH-15 50 μ H	-	-		-	-	-	-	B15	BQ	EB	60
IHM-2	-	-		-	-	-	-	P12	PM	EB	20
IHB-1	-	-		-	-	-	-	B40	BV	EB	48
IHB-2	-	-		-	-	-	-	B40	BV	EB	30
IHB-3	-	-		-	-	-	-	B40	BV	EB	20
IHB-4	-	-		-	-	-	-	B40	BV	EB	16
IHB-5	-	-		-	-	-	-	B40	BV	EB	16
IHB-6	-	-		-	-	-	-	B40	BV	EB	16
IHV-15-500	-	-		-	-	-	-	B48	BZ	EB	10
IHV-20-200	-	-		-	-	-	-	B48	BZ	EB	10
IHV-28-60	-	-		-	-	-	-	B48	BZ	EB	14
IHV-30-150	-	-		-	-	-	-	B48	BZ	EB	5
IHV-40-39	-	-		-	-	-	-	B48	BZ	EB	10
IHV-45-92	-	-		-	-	-	-	B48	BZ	EB	5
IHV-50-50	-	-		-	-	-	-	B48	BZ	EB	5
IHV-60-24	-	-		-	-	-	-	B48	BZ	EB	5
PC	-	-		-	-	-	-	F09	FJ	EB	40
VIV	-	-		-	-	-	-	F09	FJ	EB	40
VIH	-	-		-	-	-	-	F09	FJ	EB	40
WVL	-	-		-	-	-	-	F09	FJ	EB	40
TJ3-1U	-	-		-	-	-	-	T07	TG	EB	100
TJ3-2U	-	-		-	-	-	-	T07	TG	EB	100

TAPE AND REEL in inches [millimeters]											
MODEL	PREVIOUS CODE*	GLOBAL CODE LEAD BEARING	GLOBAL CODE LEAD (Pb)-FREE	REEL SIZE	CARRIER TAPE WIDTH (W)	COMPONENT PITCH (P)	UNITS/ REEL	PREVIOUS CODE*	GLOBAL CODE LEAD BEARING	GLOBAL CODE LEAD (Pb)-FREE	UNITS/ BULK
TJ4-1U	-	-		-	-	-	-	T07	TG	EB	100
TJ4-2U	-	-		-	-	-	-	T07	TG	EB	30
TJ5-1U	-	-		-	-	-	-	T07	TG	EB	100
TJ5-2U	-	-		-	-	-	-	T07	TG	EB	30
TJ5-1U-HT	-	-		-	-	-	-	-	-	EB	48
TJ5-2U-HT	-	-		-	-	-	-	-	-	EB	24
TJ3-1U-HT	-	-		-	-	-	-	-	-	EB	60
TJ3-2U-HT	-	-		-	-	-	-	-	-	EB	30
TJ6-1U	-	-		-	-	-	-	T07	TG	EB	20
TJ6-2U	-	-		-	-	-	-	T07	TG	EB	36
TJ7-1U	-	-		-	-	-	-	T07	TG	EB	20
TJ7-2U	-	-		-	-	-	-	T07	TG	EB	12
TJ8-1U	-	-		-	-	-	-	T07	TG	EB	15
TJ8-2U	-	-		-	-	-	-	T07	TG	EB	8
TJ9-1U	-	-		-	-	-	-	T07	TG	EB	9
TJ9-2U	-	-		-	-	-	-	T07	TG	EB	3
TE-3	-	-		-	-	-	-	P09	PJ	EB	5
TE-4	-	-		-	-	-	-	P09	PJ	EB	2
TE-5	-	-		-	-	-	-	P09	PJ	EB	2
TD-3	-	-		-	-	-	-	P09	PJ	EB	5
TD-4	-	-		-	-	-	-	P09	PJ	EB	2
TD-5	-	-		-	-	-	-	P09	PJ	EB	2
TC	-	-		-	-	-	-	B09	BJ	EB	36
TA	-	-		-	-	-	-	B42	BX	EB	45
PT-10	-	-		-	-	-	-	C03	CC	EB	32
PT-20	-	-		-	-	-	-	B09	BJ	EB	32
PT-50	-	-		-	-	-	-	B09	BJ	EB	45
PT-100	-	-		-	-	-	-	B09	BJ	EB	50
PT-200	-	-		-	-	-	-	B09	BJ	EB	50
PL-11-xx	-	-		-	-	-	-	C03	CC	EB	10
PL-22-xx	-	-		-	-	-	-	C03	CC	EB	10

MILITARY PART ORDERING EXAMPLES	
TRANSFORMERS AND INDUCTORS	
<p>MIL-T-27E (Basic [TF]) (Established Reliability - None) $\frac{M27}{1} \frac{215}{2} \frac{05}{3} =$ Dale TE- 1.0 2% Type 3Q0TR mH</p>	<ol style="list-style-type: none"> 1. Military Specification 2. Specification Sheet Number 3. Specification Sheet Dash Number Indicating Value and Electrical Ratings
<p>MIL-C-15305E (Basic [LT]) (Established Reliability MIL-C-39010) $\frac{LT}{1} \frac{4}{2} \frac{K}{3} =$ Dale IM-2 (0.10 μH to 1.00 μH) 10% Type</p>	<p>NOTE: Parts will be color banded. Value per Military Standard dash number.</p> <ol style="list-style-type: none"> 1. Style 2. Grade and Class 3. Family K = Coil, Radio Frequency, Fixed

MILITARY COLOR CODES - RF COILS			
	BAND B & C	BAND D	BAND E
COLOR	SIGNIFICANT FIGURES or DECIMAL POINT	MULTIPLIER* or SIGNIFICANT FIGURE	INDUCTANCE TOLERANCE
Black	0	1	-
Brown	1	10	± 1 %
Red	2	100	± 2 %
Orange	3	1000	± 3 %
Yellow	4	10 000	± 4 %
Green	5	-	-
Blue	6	-	-
Violet	7	-	-
Gray	8	-	-
White	9	-	-
None**	-	-	± 20 %
Silver	-	-	± 10 %
Gold	Decimal Point	-	± 5 %

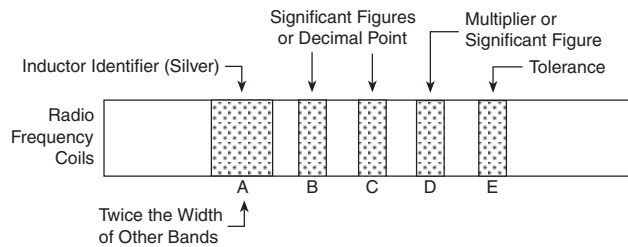

Band "A" is twice the width of the other bands and is silver in color to identify part as an inductor. ***

For Inductance Values Less Than 10 either Band "B" or Band "C" will be gold and will represent the decimal point. The other two bands ("B" and "D" or "C" and "D") will represent significant figures.

For Inductance Values of 10 or More Band "B" and Band "C" represent significant figures and Band "D" is the Multiplier.

For small units, dots may be used in place of bands.

* The multiplier is the factor by which two significant figures are multiplied to yield the nominal inductance value.

** Indicates body color.

*** Coated inductors are marked with four color bands, the first being a double wide significant figure or decimal point in lieu of the double wide silver inductor identifier.