

Mixers Image Rejection

Applications

- Wideband Sweeping Receivers
- Spectrum Analyzers
- Surveillance Receivers
- Wideband Test Instrumentation
- Starved LO Systems

Features


- 30 to 240 MHz IF Available
- Military Grade
- 4.0 – 8.0 GHz
- Excellent Image Suppression
- Low Conversion Loss
- Stainless Steel Connectors
- Biased Versions Available
- Meets MIL-E-5400 Class 3 Requirements



Model 150017-300 shown above

Outline Drawing

NOTES:
Electrical and Mechanical Specifications subject to change without notice

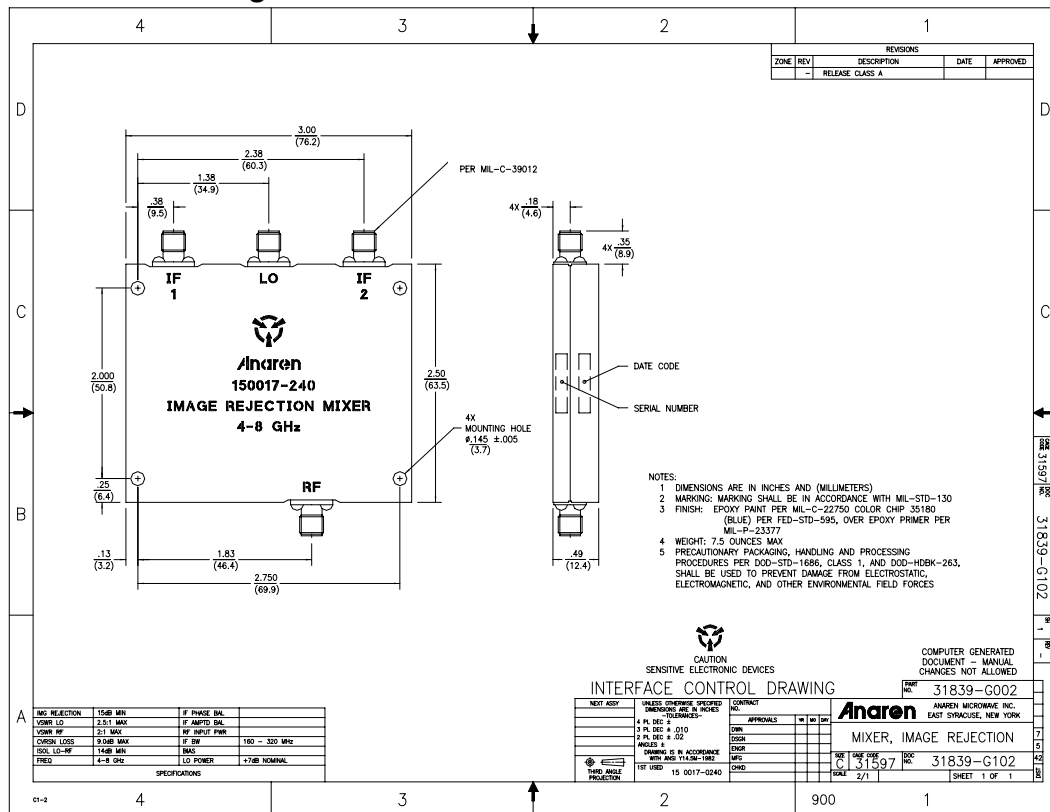

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Anaren:](#)

[150017-240](#)