

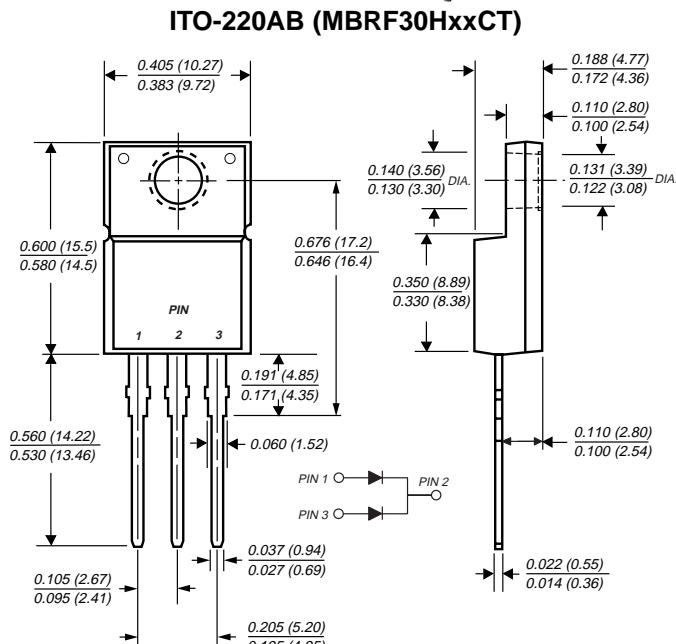



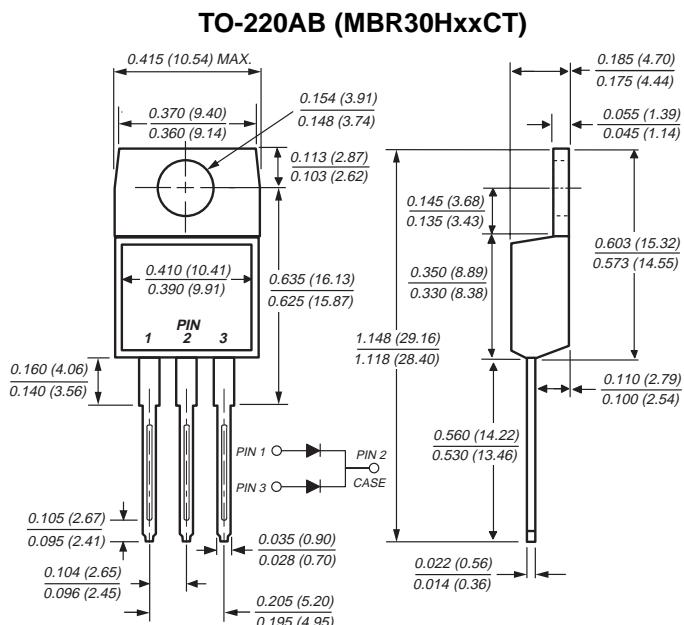


KERSEMI

MBR30HxxCT, MBRF30HxxCT, MBRB30HxxCT

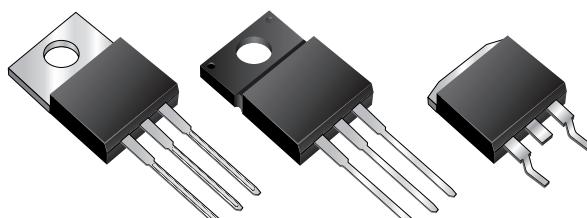

Mounting Pad Layout TO-263AB

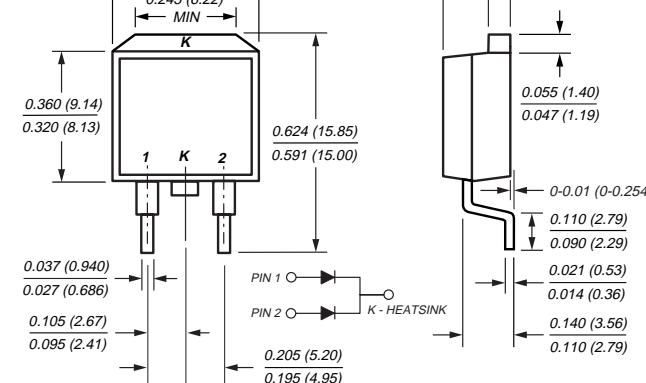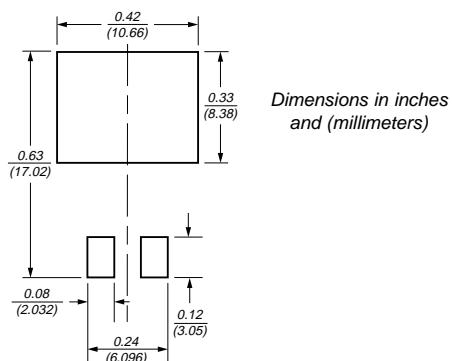

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94 V-0
- Dual rectifier construction, positive center tap
- Metal silicon junction, majority carrier conduction
- Low forward voltage drop, low power loss and high efficiency
- Guardring for overvoltage protection
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- Rated for reverse surge and ESD
- 175 °C maximum operation junction temperature

Mechanical Data

Case: JEDEC TO-220AB, ITO-220AB & TO-263AB molded plastic body

Terminals: Plated leads, solderable per MIL-STD-750, Method 2026

High temperature soldering guaranteed: 250 °C/10 seconds, 0.25" (6.35 mm) from case

Polarity: As marked **Mounting Position:** Any

Mounting Torque: 10 in-lbs maximum

Weight: 0.08 oz., 2.24 g



MBR30HxxCT, MBRF30HxxCT, MBRB30HxxCT

KERSEMI

Maximum Ratings (T_C = 25 °C unless otherwise noted)

Parameter	Symbol	MBR30H35CT	MBR30H45CT	MBR30H50CT	MBR30H60CT	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	35	45	50	60	V
Working peak reverse voltage	V _{RWM}	35	45	50	60	V
Maximum DC blocking voltage	V _{DC}	35	45	50	60	V
Max. average forward rectified current (see fig. 1)	Total device Per leg	I _{F(AV)}	30 15			A
Peak repetitive forward current at T _C = 150 °C (rated V _R , 20 KHz sq. wave)	I _{FRM}		30			A
Non-repetitive avalanche energy per leg at 25 °C, I _{AS} = 4 A, L = 10 mH	E _{AS}		80			mJ
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method) per leg	I _{FSM}		150			A
Peak repetitive reverse surge current per leg at t _p = 2.0 μs, 1 KHz	I _{RRM}	1.0		0.5		A
Peak non-repetitive reverse energy (8/20 μs waveform)	E _{RSR}	25		20		mJ
Electrostatic discharge capacitor voltage Human body model: C = 100 pF, R = 1.5 kΩ	V _C		25			kV
Voltage rate of change (rated V _R)	dV/dt		10,000			V/μs
Operating junction temperature range	T _J		−65 to +175			°C
Storage temperature range	T _{STG}		−65 to +175			°C
RMS Isolation voltage (MBRF type only) from terminals to heatsink with t = 1.0 second, RH ≤ 30%	V _{ISOL}		4500 ⁽¹⁾ 3500 ⁽²⁾ 1500 ⁽³⁾			V

Electrical Characteristics (T_C = 25 °C unless otherwise noted)

Parameter	Symbol	MBR30H35CT, MBR30H45CT		MBR30H50CT, MBR30H60CT		Unit
		Typ	Max	Typ	Max	
Maximum instantaneous forward voltage per leg ⁽⁴⁾	V _F	—	0.62	—	0.68	V
		0.49	0.56	0.55	0.59	
		—	0.73	—	0.83	
		0.62	0.67	0.68	0.71	
Maximum instantaneous reverse current at rated DC blocking voltage per leg ⁽⁴⁾	I _R	— 5.0	80 15	— 4.0	60 15	μA mA

Thermal Characteristics (T_C = 25 °C unless otherwise noted)

Parameter	Symbol	MBR	MBRF	MBRB	Unit
Thermal resistance from junction to case per leg	R _{θJC}	1.5	4.5	1.5	°C/W

Notes:

- (1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
- (2) Clip mounting (on case), where leads do overlap heatsink
- (3) Screw mounting with 4-40 screw, where washer diameter is ≤ 4.9 mm (0.19")
- (4) Pulse test: 300 μs pulse width, 1% duty cycle

Ordering Information

Product	Case	Package Code	Package Option
MBR30H35CT – MBR30H60CT	TO-220AB	45	Anti-Static tube, 50/tube, 2K/carton
MBRF30H35CT – MBRF30H60CT	ITO-220AB	45	Anti-Static tube, 50/tube, 2K/carton
MBRB30H35CT – MBRB30H60CT	TO-263AB	31 45 81	13" reel, 800/reel, 4.8K/carton Anti-Static tube, 50/tube, 2K/carton Anti-Static 13" reel, 800/reel, 4.8K/carton



MBR30HxxCT, MBRF30HxxCT, MBRB30HxxCT

KERSEMI

Fig. 1 – Forward Current Derating Curve

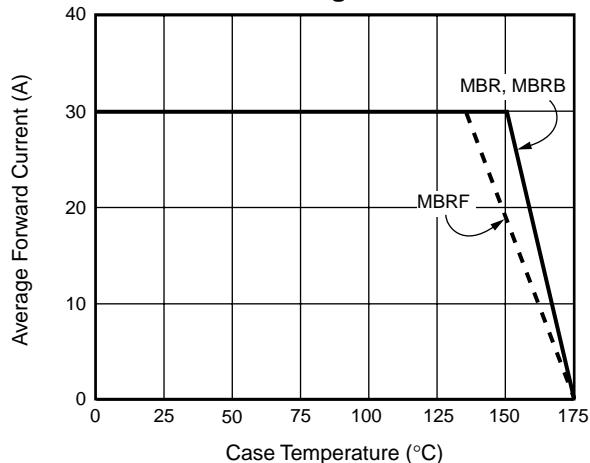


Fig. 3 – Typical Instantaneous Forward Characteristics Per Leg

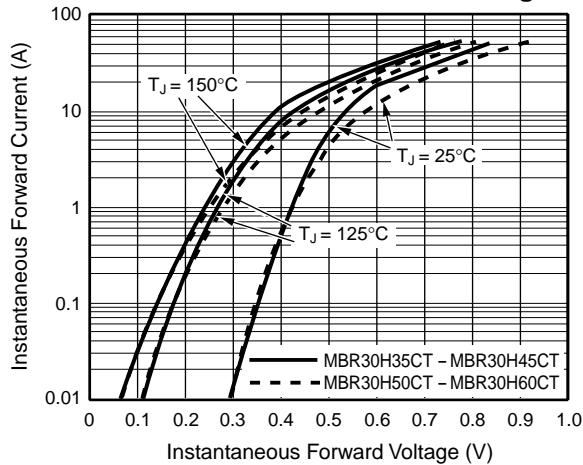


Fig. 5 – Typical Junction Capacitance Per Leg

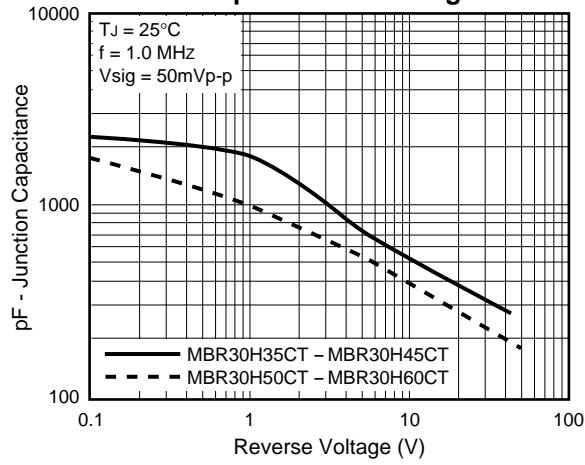


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current Per Leg

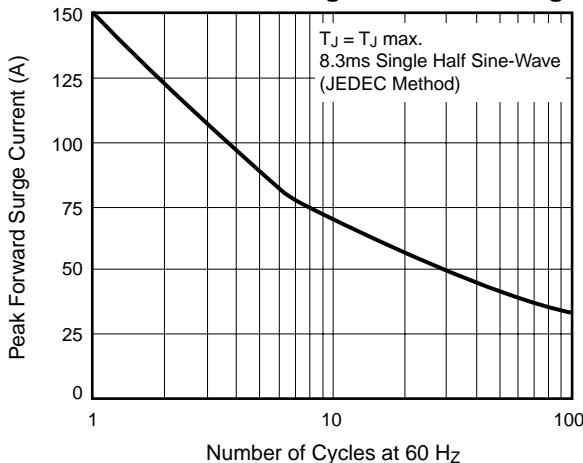


Fig. 4 – Typical Reverse Characteristics Per Leg

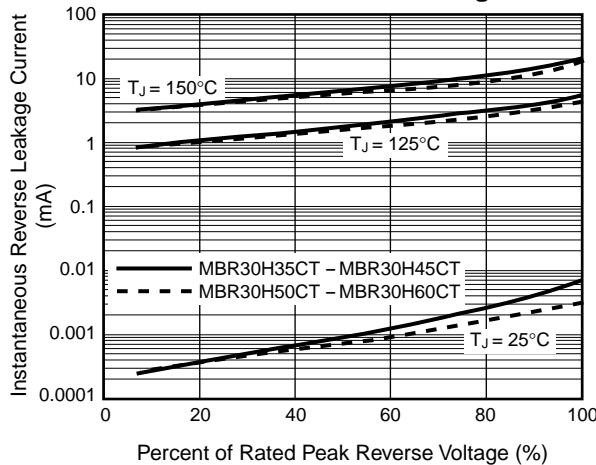


Fig. 6 – Typical Transient Thermal Impedance Per Leg

