



# MMBD5819

### ■ Features

- Power Dissipation:  $P_D = 300\text{mW}$
- Collector Current:  $I_F = 1\text{A}$
- Collector-Base Voltage:  $V_R = 40\text{V}$

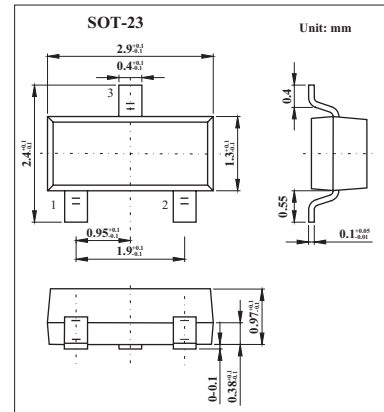

### ■ PIN Array



### ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector Current	$I_F$	1	A
Collector-Base Voltage	$V_R$	40	V
Power Dissipation	$P_D$	300	mW
Operating and Storage Junction Temperature Range	$T_j, T_{STG}$	-55 to +150	$^\circ\text{C}$

### ■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	$I_R = 1\text{mA}$	40			V
Forward Voltage (pulse test)	$V_F$	$I_F = 1\text{A}$			0.6	V
		$I_F = 3\text{A}$			0.9	
Reverse Voltage Leakage Current	$I_R$	$V_R = 20\text{V}$			1	$\mu\text{A}$
		$V_R = 40\text{V}$			1	
Diode Capacitance	$C_D$	$V_R = 0, f = 1.0\text{MHz}$			120	pF

### ■ Marking

Marking	SL
---------	----