

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES


- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection
- Bias circuits
- Protection circuits

MARKING:


K

PACKAGE INFORMATION

Package	MPQ	Leader Size
SOT-523	3K	7 inch

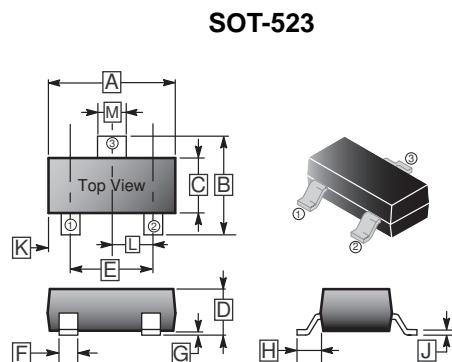

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	1.5	1.7	G	-	0.1
B	1.45	1.75	H	0.55	REF.
C	0.75	0.85	J	0.1	0.2
D	0.7	0.9	K	-	
E	0.9	1.1	L	0.5	TYP.
F	0.15	0.25	M	0.25	0.325



ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Ratings		Unit
Peak Repetitive Peak reverse voltage	V_{RRM}	20		V
DC Blocking Voltage	V_R	20		V
Maximum peak forward current	I_{FM}	200		mA
Average forward current	I_O	100		mA
Power Dissipation	P_D	150		mW
Storage temperature	T_J, T_{STG}	150, -55~150		°C

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Max.	Unit	Test Conditions
Reverse breakdown voltage	$V_{(BR)R}$	20	-	V	$I_R = 100\mu\text{A}$
Reverse voltage leakage current	I_R	-	0.1	μA	$V_R = 15\text{V}$
Forward voltage	V_F	-	1	V	$I_F = 10\text{mA}$

CHARACTERISTIC CURVES

