



1SMA5921-AU~1SMA5942-AU

SURFACE MOUNT SILICON ZENER DIODE

VOLTAGE 6.8 to 51 Volts **POWER** 1.5 Watts

SMA / DO-214AC


Unit : inch(mm)

FEATURES

- For surface mounted applications in order to optimize board space
- Low profile package
- Built-in strain relief
- Glass passivated junction
- Low inductance
- Typical I_R less than 1.0 μ A above 12V
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- High temperature soldering : 260°C /10 seconds at terminals
- Acquire quality system certificate : TS16949
- AEC-Q101 qualified
- Lead free in comply with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: JEDEC DO-214AC, Molded plastic over passivated junction
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Standard Packaging: 12mm tape (EIA-481)
- Weight: 0.0023 ounce, 0.0679 gram

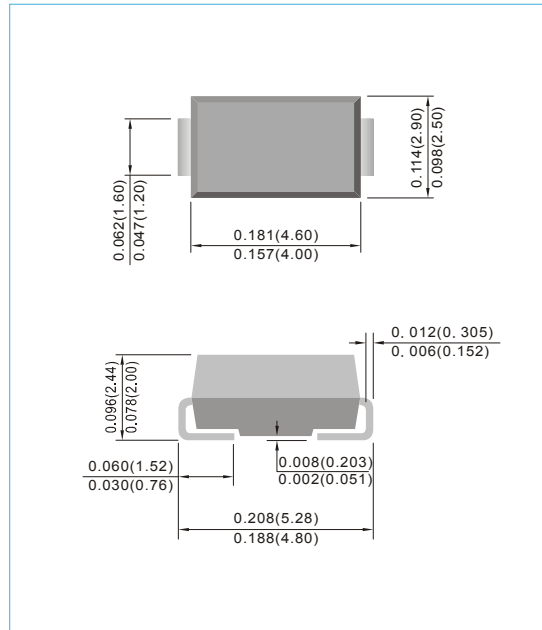

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Units
Peak Pulse Power Dissipation on TL=75 °C (Note A) Derate above 75 °C	P_D	1.5	Watts
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	10	Amps
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150	°C

NOTES:

A. Mounted on 5.0mm² (.013mm thick) land areas.

B. Measured on 8.3ms, and single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum.









1SMA5921-AU~1SMA5942-AU

Part Number	Nominal Zener Voltage			Maximum Zener Impedance				Max. Reverse Leakage Current		Marking Code
	V _Z @ I _{ZT}			Z _{ZT} @ I _{ZT}		Z _{ZK} @ I _{ZK}		I _R	V _R	
	Nom V	MinV	Max V	Ω	mA	Ω	mA	μA	V	
1SMA5921-AU	6.8	6.46	7.14	3	55.1	200	1	5	5.2	921A
1SMA5922-AU	7.5	7.13	7.88	3	50	400	0.5	5	6	922A
1SMA5923-AU	8.2	7.79	8.61	4	45.7	400	0.5	5	6.5	923A
1SMA5924-AU	9.1	8.65	9.56	4	41.2	500	0.5	5	7	924A
1SMA5925-AU	10	9.5	10.5	5	37.5	500	0.25	5	8	925A
1SMA5926-AU	11	10.45	11.55	6	34.1	550	0.25	1	8.4	926A
1SMA5927-AU	12	11.4	12.6	7	31.2	550	0.25	1	9.1	927A
1SMA5928-AU	13	12.35	13.65	7	28.8	550	0.25	1	9.9	928A
1SMA5929-AU	15	14.25	15.75	9	25	600	0.25	1	11.4	929A
1SMA5930-AU	16	15.2	16.8	10	23.4	600	0.25	1	12.2	930A
1SMA5931-AU	18	17.1	18.9	12	20.8	650	0.25	1	13.7	931A
1SMA5932-AU	20	19	21	14	18.7	650	0.25	1	15.2	932A
1SMA5933-AU	22	20.9	23.1	18	17	650	0.25	1	16.7	933A
1SMA5934-AU	24	22.8	25.2	19	15.6	700	0.25	1	18.2	934A
1SMA5935-AU	27	25.65	28.35	23	13.9	700	0.25	1	20.6	935A
1SMA5936-AU	30	28.5	31.5	26	12.5	750	0.25	1	22.8	936A
1SMA5937-AU	33	31.35	34.65	33	11.4	800	0.25	1	25.1	937A
1SMA5938-AU	36	34.2	37.8	38	10.4	850	0.25	1	27.4	938A
1SMA5939-AU	39	37.05	40.95	45	9.6	900	0.25	1	29.7	939A
1SMA5940-AU	43	40.85	45.15	53	8.7	950	0.25	1	32.7	940A
1SMA5941-AU	47	44.65	49.35	67	8	1000	0.25	1	35.8	941A
1SMA5942-AU	51	48.45	53.55	70	7.3	1100	0.25	1	38.8	942A





1SMA5921-AU~1SMA5942-AU

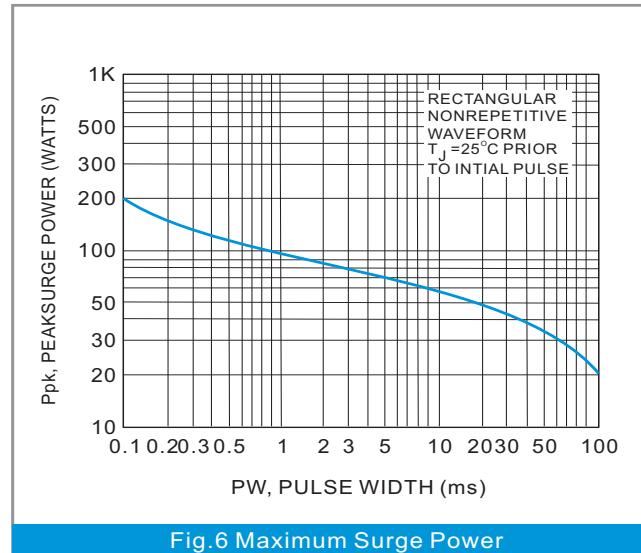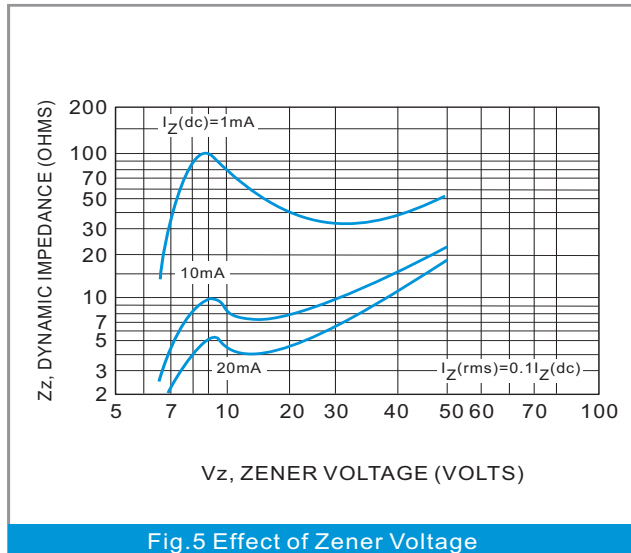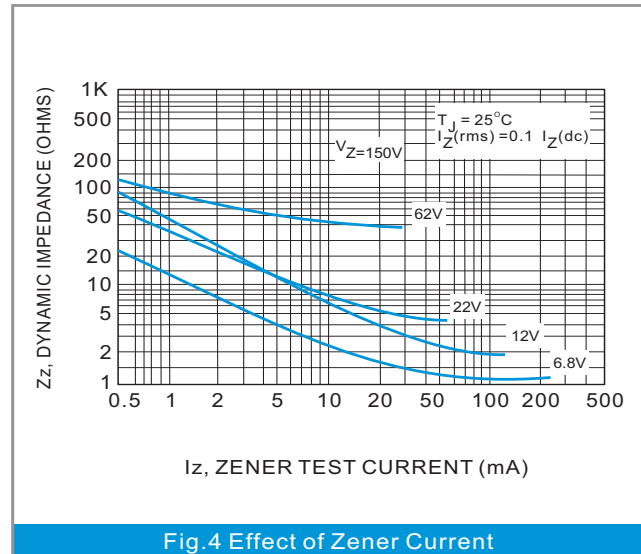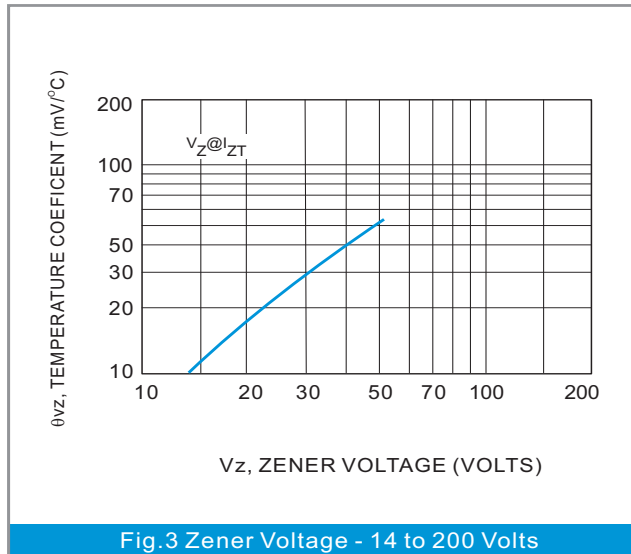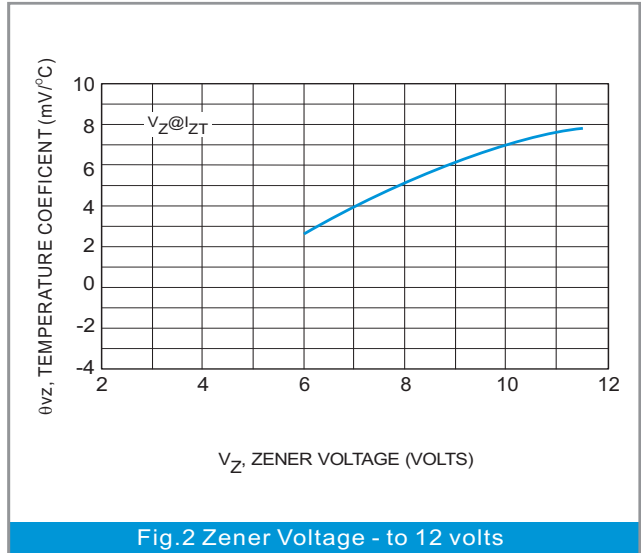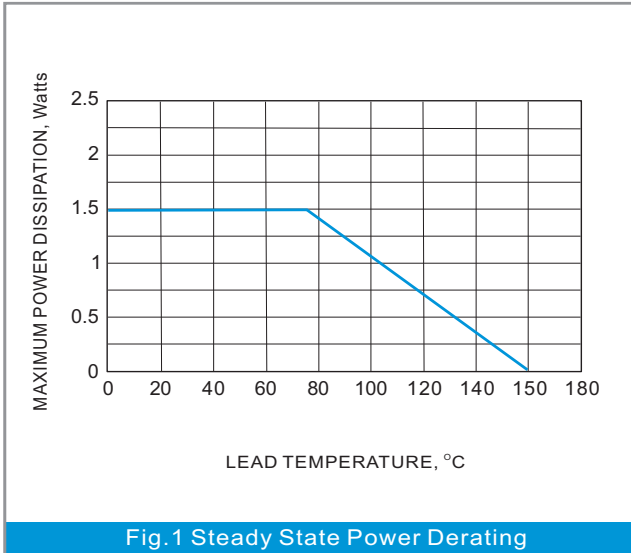



1SMA5921-AU~1SMA5942-AU

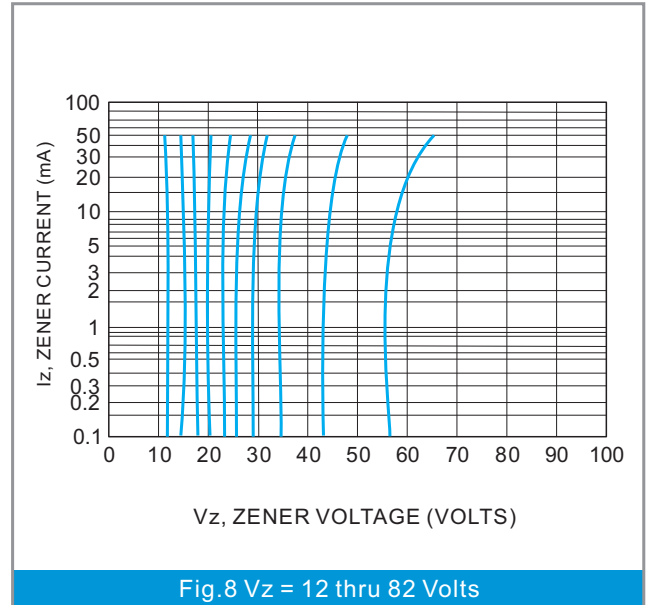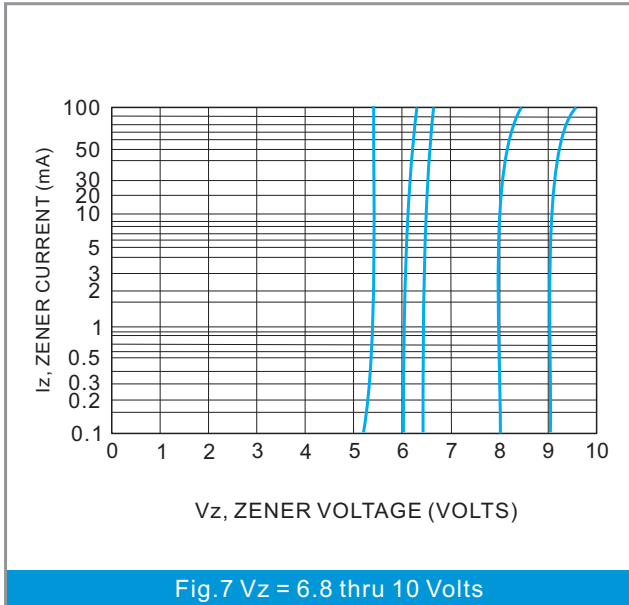

NOTE 3. ZENER VOLTAGE (V_z) MEASUREMENT

Nominal zener voltage is measured with the device function in thermal equilibrium with ambient temperature at 25°C


NOTE 4. ZENER IMPEDANCE (Z_z) DERIVATION

Z_{zt} and Z_{zk} are measured by dividing the ac voltage drop across the device by the ac current applied. The specified limits are for $I_z(ac) = 0.1 I_z, (dc)$ with the ac frequency = 60Hz



1SMA5921-AU~1SMA5942-AU

MOUNTING PAD LAYOUT

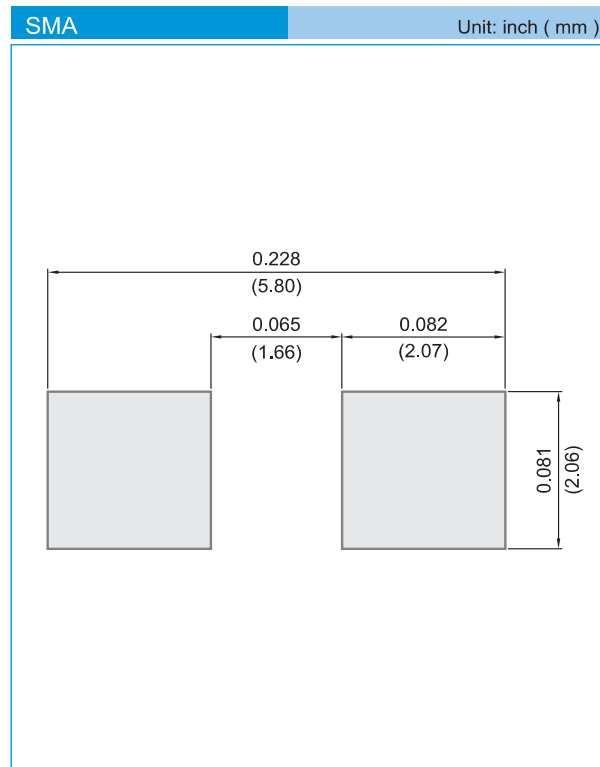

ORDER INFORMATION

- Packing information
 - T/R - 7.5K per 13" plastic Reel
 - T/R - 1.8Kper 7" plastic Reel



1SMA5921-AU~1SMA5942-AU

Part No_packing code_Version

- 1SMA5921-AU_R1_000A1
- 1SMA5921-AU_R1_000A1
- 1SMA5921-AU_R2_000A1
- 1SMA5921-AU_R2_000A1

For example :

RB500V-40_R2_00001



Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



1SMA5921-AU~1SMA5942-AU

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.