

COAXIAL RESONATOR OSCILLATOR

Series 521

1200 - 1400 MHz

Features

- Low Phase Noise Bipolar Transistor
- Rugged Construction for Extreme Environmental Conditions
- High Frequency Stability
- Voltage Tuned

Specifications



CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = -20 °C to +70 °C
Frequency	1200 - 1400 MHz	1200 - 1400 MHz
Output Power (dBm)	+10	+13 Max.
Spurious (dBc)	-80	-80
Phase Noise (dB) @ 1200 MHz	-45 dBc/Hz @ 100 Hz -85 dBc/Hz @ 1 KHz -111 dBc/Hz @ 10 KHz -135 dBc/Hz @ 100 KHz -146 dBc/Hz @ 1 MHz	
VSWR	1.5	2.0
Harmonics (dBc)	-25	-25
Frequency Pushing	+/- .01% / Volt	+/- .02% / Volt
Frequency Pulling	+/- 0.02%	+/- 0.03%
Temperature Drift	+/- 0.1%	+/- 0.15%
Storage Temperature	-55 °C	+125 °C
Supply Power DC	15	15
mA	70	80

NOTE: Care should always be taken to effectively ground the case of each unit.

Spectrum Microwave CROs produce impressive frequency stability and phase noise when used in a properly designed oscillator circuit.

Maximum Ratings

Ambient Operating Temperature -55°C to +100 °C
 Storage Temperature -62°C to +125 °C
 Case Temperature +125 °C
 DC Voltage +20 Volts
 Maximum DC Tuning Voltage..... +20 Volts
 Minimum DC Tuning Voltage..... 0 Volts

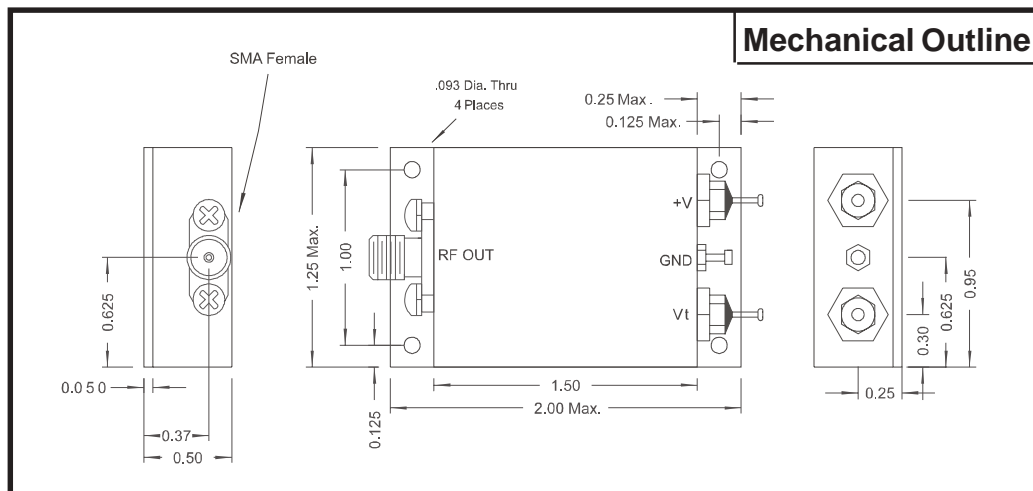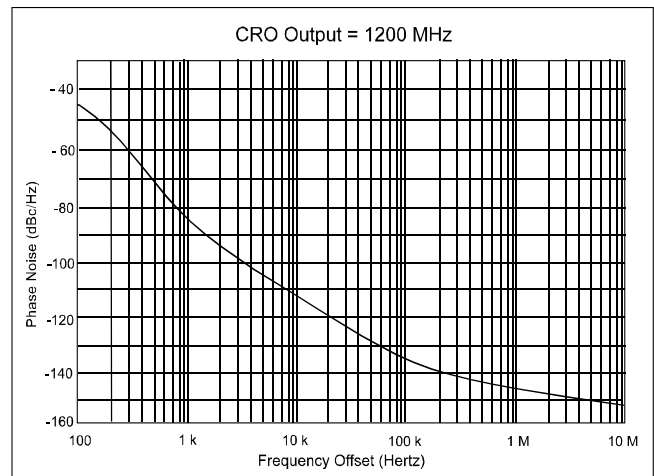

Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532

Rev. 9/23/08

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001