
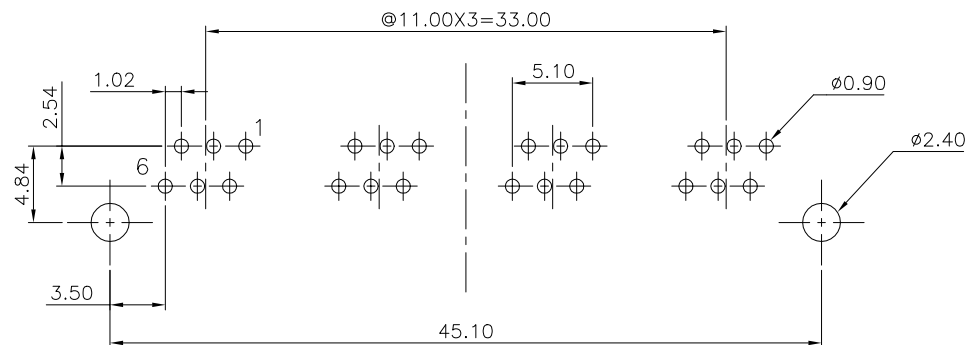
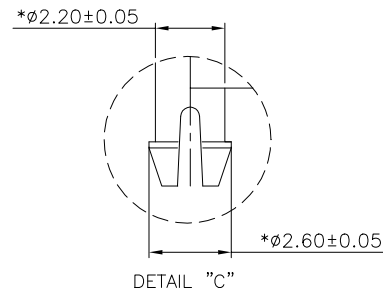
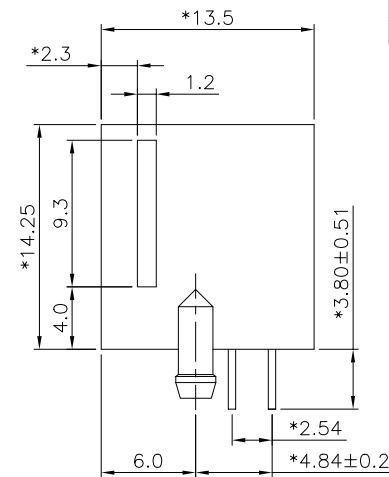


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

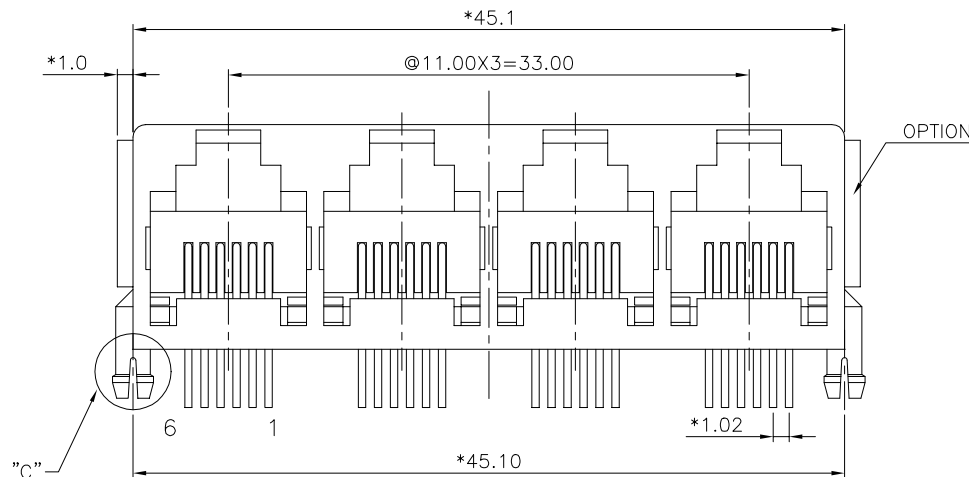

PC Board Layout Component Side Shown

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLYESTER UL 94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO $+85^{\circ}\text{C}$.
- OPERATION: 0°C TO 70°C .

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E556X-20CXXX-L

NO. OF CONTACT	1- 3u" 2- 6u" 3-15u"
2-2 CONTACTS	4-30u" 5-50u" 6-Pd20u"
4-4 CONTACTS	0-PBT+15% BK
6-6 CONTACTS	5-PBT+30% BK
	D-PBT+30% GY
	U-FR52 BK
	1-W/ PANEL STOP
	2-W/O PANEL STOP

DETACHED LISTS	MM (INCH)	DFTD CHLOE	DATE 2005/07/26	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD Chloie	DATE2005/07/26		
	MM	MFO	DATE	TITLE	
	.0 ± 0.2	APPV/LJackson	DATE2005/07/26	MINI L/P SIDE ENTRY PCB JACK 6P	
	.00 ± 0.15			DRAWING NO. GE553023-LC	
	.000 ± 0.075			/PART NO. PART_NO.	
	ANGLES ± 0.5			SIZE REV	
				A3 0	
	THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING	
				SHEET OF	