



RoHS Conforming

Features

- Miniature size (2.5×2.0×1.0 mm)
- Wide frequency range
- High precision type is available for full speed USB.

Applications

- CD-R/W
- HDD
- DVD-ROM
- MD
- Printer
- Cellular (CDMA/PCS)
- Portable Electronic Equipment
- Memory Card
- USB

How to Order

$$\frac{\text{SSR}}{(1)} \quad \frac{33.86}{(2)} \quad \frac{D}{(3)} \quad \frac{R}{(4)}$$


- ①Series
②Oscillating frequency(MHz)
③Type
④Packaging : Tape & Reel
2000pcs/Reel

Notice


- Non washable

Dimensions

(Unit : mm)

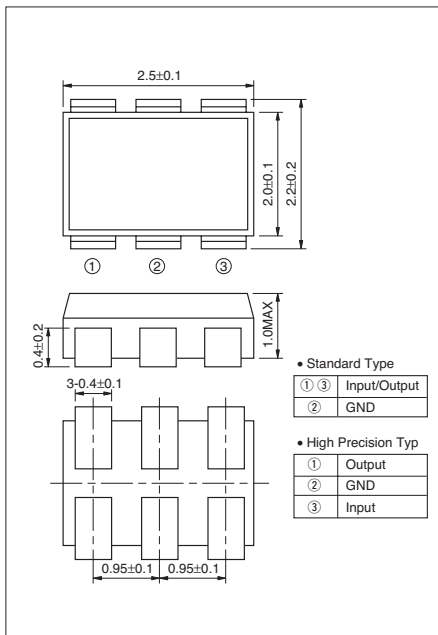

Test Circuit

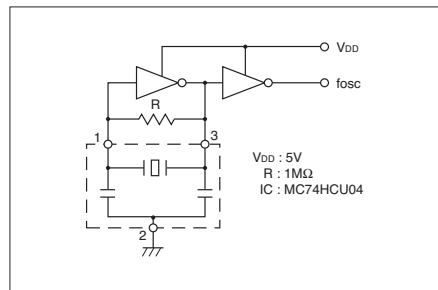

Specifications

- Standard Type

Frequency Range	Frequency Tolerance (25°C)	Temperature Stability (-20 to 80°C)	IC	Standard Frequency (MHz)
20.00 to 60.0MHz	±0.5%	±0.3%	MC74HCU04 (MOTOROLA)	20.00, 33.86, 48.0


Please contact your local AVX office for IC matching.

- High Precision Type


Frequency Range	Frequency Tolerance (25°C)	Temperature Stability (-20 to 70°C)	Aging (10 years)	IC	Standard Frequency (MHz)
30.00 to 60.0MHz	±0.18% (Option ±0.08%)	±0.06%	±0.01%	MC74HCU04 (MOTOROLA)	48.0

Recommended Land Pattern (Unit : mm)

(Unit : mm)

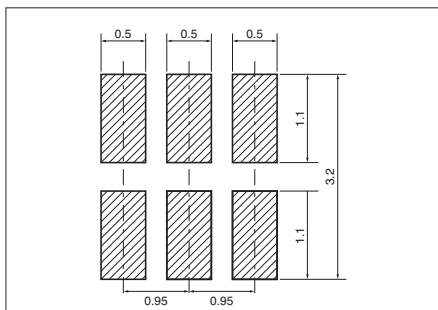

Recommended Reflow Profile

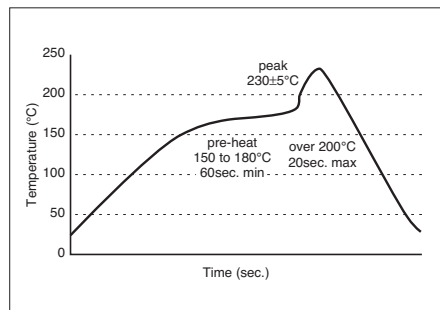

Packaging : Taping

(Unit : mm)

