


5632 Series Stackable Right Angle LED Assembly

Description and Features

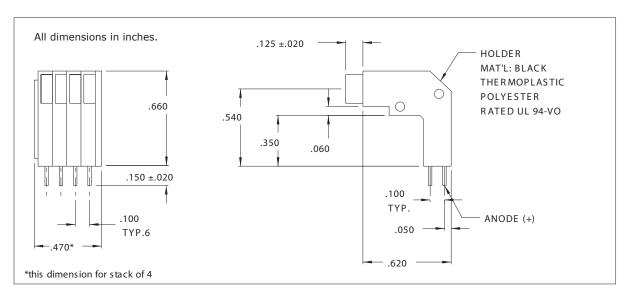

Features

- Stackable 1 to 14 positions.
- · Designed to align with right angle DIP switches.
- Indicates status on/off, offered in red, green or yellow.
- 100° viewing angle, diffused epoxy.
- Standoffs prevent flux entrapment.
- High contrast black housing meets UL94V-O and Bellcore flammability ratings.

Refer to "Mounting Hole Pattern 4.pdf"

Electro-Optical Characteristics and Ratings

Part Number	E mitted C olor	Typical Intensity (mcd)	R ated C urrent (mA)	Continuous Forward Current Max. (mA)	Forward Voltage		Reverse	Peak
					Тур. (V)	Max. (V)	Breakdown Voltage Min. (V)	Wavelength (nm)
5632D1	Red	4	20	35	2.0	3.0	5	635
5632D3	Amber	4	20	30	2.2	3.0	5	600
5632D5	Green	4	20	35	2.1	3.0	5	562
5632D7	Yellow	4	20	30	2.0	3.0	5	585

