



1 | 2 3 4

CONTACT PART NUMBER (XXXXY)	CLIP/SHELL PLATING	"C" DIM.	INSERTION FORCE	EXTRACTION FORCE	NO. OF FINGERS	REF. CLIP NO.
003B1	30 u" GOLD/200 u" TIN	.020 DIA.	65 G VERY LOW	28 G	6	6 (32)

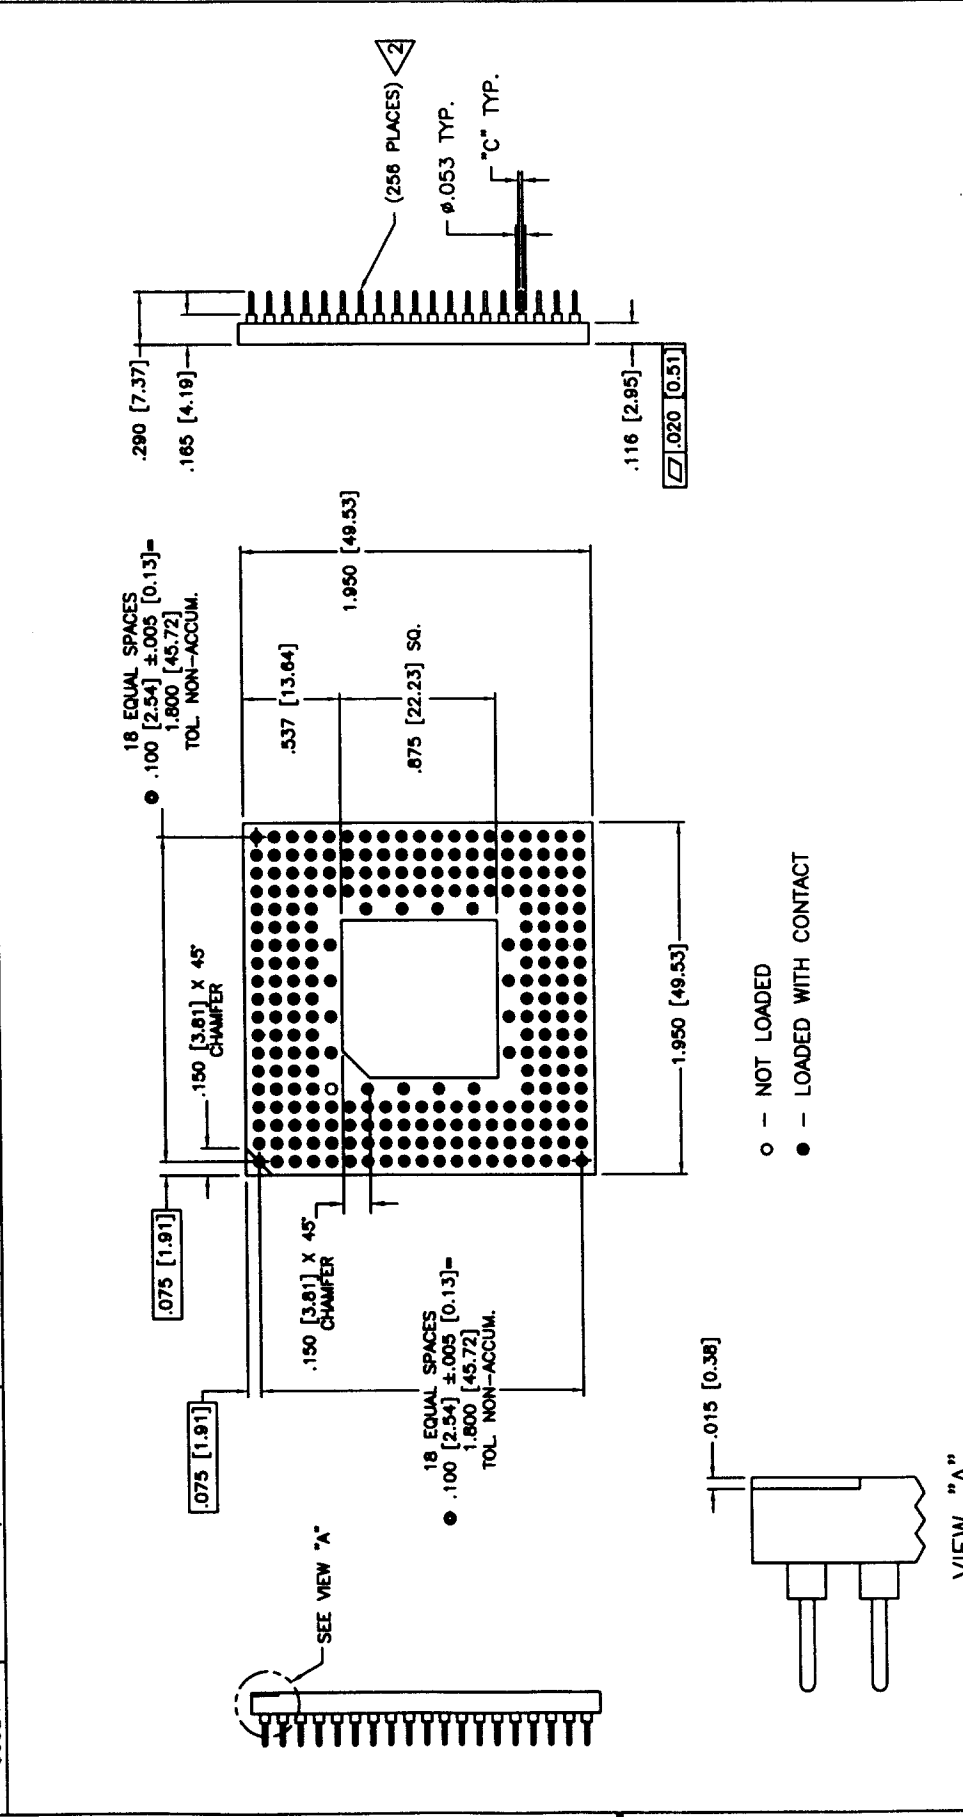

○ - NOT LOADED
● - LOADED WITH CONTACT

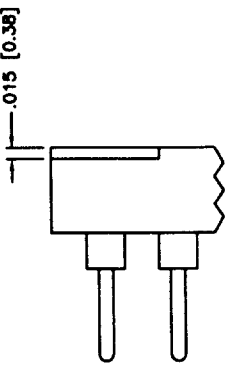

VIEW "A"
SCALE 4:1

NOTES:

- INSULATOR MATERIAL:
GLASS REINFORCED POLYPHENYLENE SULFIDE (PPS)
UL 94V-0, COLOR BLACK.
- CONTACT MATERIAL:
OUTER SHELL: BRASS ALLOY 360, 1/2 HARD PER QQ-B-626.
INNER CONTACT: BERYLLIUM COPPER, ALLOY 172 PER QQ-C-533.

PART NUMBER (SEE TABLE)
PGA256HXXXY-1914R

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		Electronics FCI	
itr	ecr no	dr	date	projection	title	product family	www.fci.com
A	D10002	TB	4/5/01	1st angle	(19X19) PGA SOCKET	SOCKETS	
				dr	INCH/MM	size	code
				app'g.	scale	dwg no	sheet
				T. BAJ	1:1	A	1 of 1
				emp'g. CHAPPELANE		58321	
				chr' g. CHAPPELANE			
				app'g. CHAPPELANE			
sheet	revision	A	1				
index	sheet						
							cage code
							22526

ACAD