

用途:用于高效 DC/DC 转换和功率开关。


Purpose: These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.

特点: 低栅电荷, 低反馈电容, 开关速度快。

Features: Low gate charge, low crss, fast switching.

极限参数/Absolute maximum ratings(Ta=25°C)

参数符号 Symbol	数值 Rating	单位 Unit
V _{DSS}	500	V
I _D (Tc=25°C)	5.0	A
I _D (Tc=100°C)	3.0	A
I _{DM}	20	A
V _{GSS}	±30	V
I _{AR}	5	A
E _{AS}	292	mJ
E _{AR}	8.75	mJ
P _D (Tc=25°C)	87.5	W
T _J , T _{STG}	-55 to 150	°C

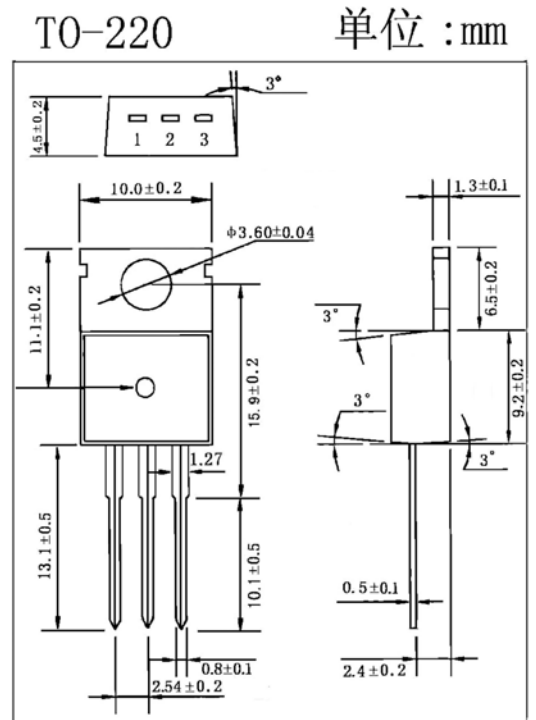

引脚: 1 G 2 D 3 S

电性能参数/Electrical Characteristics(Ta=25°C)

参数符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
BV _{DSS}	V _{GS} =0V I _D =250 μ A	500			V
I _{DSS}	V _{DS} =500V V _{GS} =0V			10	μ A
	V _{DS} =400V T _C =125°C			100	μ A
I _{GSS}	V _{GS} =±30V V _{DS} =0V			±0.1	μ A
V _{GS(th)}	V _{DS} =V _{GS} I _D =250 μ A	2.0		4.0	V
R _{DS(on)}	V _{GS} =10V I _D =2.5A		1.15	1.4	Ω
g _{FS}	V _{DS} =40V I _D =2.5A		4.2		S
V _{SD}	V _{GS} =0V I _S =5.0A			1.5	V
C _{iss}	V _{DS} =25V V _{GS} =0V f=1.0MHz		680	900	pF
C _{oss}			85	110	
C _{rss}			15	20	
t _{d(on)}	V _{DD} =250V I _D =5.0A R _C =25 Ω		20	50	ns
t _r			40	90	
t _{d(off)}			90	190	
t _f			45	100	

