

### TYPES YAE-Z BOX AND YAE-Z



#### INSULUG™

TERMINAL -  
NYLON INSULATED,  
FLANGED FORK

MULTI-FINGER  
INSULATION GRIP

300 VOLTS MAX. 105° C MAX

INSULUG™ type YAE-Z is identical to type YAE-N and employs a flanged fork tongue for faster installation while maintaining security if supporting screw becomes loose.

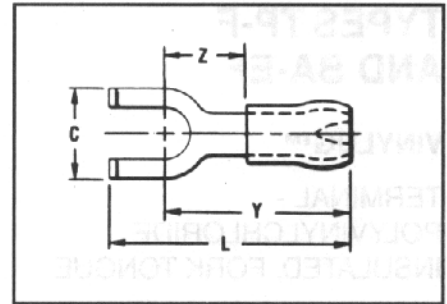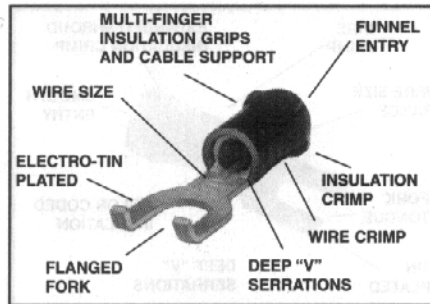

#### Features and Benefits

- Flanged fork.
  - ◇ Permits rapid, easy installation of the terminal under the screw head without complete removal of the screw. Additionally, it may not be removed with only a slight loosening of the screw.



CATALOG NUMBER	WIRE RANGE	STUD SIZE	DIMENSIONS				BULK CATALOG NUMBER	INSTALLATION TOOLING
			C	Z MAX.	Y MAX.	L MAX.		
YAE22Z1 BOX	26-20 Max. Insul.	1-2	.18	.24	.65	.75	YAE22Z1	M8ND with N14HET-25V1 Die Y10D, Y10-22
YAE22Z2 BOX	Dia.: .098"	4-6	.28	.28	.70	.83	YAE22Z2	
YAE22Z3 BOX	Sleeve Color: Amber	6-8	.31	.30	.72	.92	YAE22Z3	
YAE18Z1 BOX	22-16 Max. Insul. Dia. Accom.: (125) Color Code: Red	1-2	.18	.22	.73	.83	YAE18Z1	MR8-33T-1, M8ND with one of the following Dies: N14HET-15, N10HET-9, Y10D, Y10-22
YAE18Z2 BOX		4-6	.28	.26	.76	1.00	YAE18Z2	
YAE18Z3 BOX		6-8	.31	.29	.78	1.00	YAE18Z3	
YAE18Z4 BOX		8-10	.36	.34	.83	1.08	YAE18Z4	
YAE14Z2 BOX	16-14 Max. Insul.	4-6	.28	.26	.76	.90	YAE14Z2	MR833T-1, M8ND with N12HET-1, Y10D, Y10-22
YAE14Z3 BOX	Dia. Accom.: (156)	6-8	.31	.29	.78	1.00	YAE14Z3	
YAE14Z4 BOX	Color Code: Blue	8-10	.36	.34	.83	1.08	YAE14Z4	
YAE12Z2 BOX	14-12 Max. Insul.	4-6	.28	.27	.90	1.04	YAE12Z2	MR833T-1, M8ND with N12HET-1, Y10D, Y10-22
YAE12Z3 BOX	Dia. Accom.: (180)	6-8	.31	.32	.96	1.16	YAE12Z3	
YAE12Z4 BOX	Color Code: Green	8-10	.36	.35	1.00	1.23	YAE12Z4	

• Not UL recognized.